



COMMERCIAL MARINE SOLUTIONS

VERSATILE PRODUCTS WITH PROVEN PERFORMANCE

COMMERCIAL MARINE SOLUTIONS

VERSATILE PRODUCTS WITH
PROVEN PERFORMANCE

THE SHERWIN-WILLIAMS DIFFERENCE

The industry experts at Sherwin-Williams Protective & Marine are renowned authorities in their respective fields of knowledge – including Bridge & Highway, Fire Protection, Flooring, Food & Beverage, Freight Rail, Marine, Oil & Gas, Pharmaceutical, Power Generation, Steel Fabrication and Water & Wastewater. Our global technology expertise in areas including tank linings, passive fire protection, corrosion under insulation (CUI) testing and fusion-bonded epoxy drives game-changing innovation and influences global industry standards.



Unparalleled
distribution network



Global
industry expertise



Unmatched technical
and specification service



One-stop shop for
equipment and supplies

HIGH-PERFORMANCE MARINE COATINGS THAT KEEP CUSTOMER PROJECTS ON BUDGET AND ON TIME

Your customers rely on you to be their one-stop shop for shipbuilding and repairs. From the first stroke of paint to coating restoration and touch-ups, Sherwin-Williams offers a complete line of high-performance marine coating technologies that can be delivered quickly – within the same or next day. Not only do marine coatings from Sherwin-Williams enable operational efficiencies in your coatings process, they protect vessels from corrosion, create aesthetic appeal and return vessels to service quickly.

Table of Contents

Epoxy Coatings	3
Single Component Coatings	8
Two-Part Component Coatings	11
Zinc Coatings	12
Antifoulant Coatings	14
Specialty Coatings	16
Solvents	16





EPOXY COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Cardac® Macropoxy 4200XL	76%	1:1	<185g/l; 1.5 lb/gal	5.0 – 13.0	4.0 – 10.0		MEK	50°F min / 110°F max	Epoxy mastic designed to maintain a jet black appearance after extensive weathering. May be used as a direct-to-metal protective coating.			
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #	10-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Black	B58BVO422		I58BVO422	N/A		102194495	N/A	651180671				
Hardener	B58VVO422		N/A	N/A		N/A	N/A	651180689				

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
DuraPlate 6000	100%	2:1	<16g/l; 0.13 lb/gal	40.0 – 125.0	40.0 – 125.0		MEK	35°F min / 150°F max	100% solids, high build, high strength, reinforced epoxy lining.			
PACKAGE COLOR	REX		KIT REX	5-GAL KIT SALES #	15-GAL KIT SALES #	15-GAL KIT SALES #	3-GAL SALES #	5-GAL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
White	B62W00710		I62W00710	101852796		101852788	651104408	651104390	N/A			
Off White Part B	B62V00710		I62W00710-WK	N/A		101852788	N/A	651104465	N/A			
Black Part B	B62BW0710		I62W0710G-WK	N/A		101852804	N/A	651104473	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Fast Clad ER	100%	1:1	<85 g/l; 0.71lb/gal	18.0 – 22.0	18.0 – 22.0		MEK1	40°F min / 110°F max	Edge retentive, ultra high solids epoxy.			
PACKAGE COLOR	REX		KIT REX	10-GAL KIT SALES #	100-DRUM KIT SALES #	100-DRUM KIT SALES #	5-GAL SALES #	DRUM SALES #	CARTRIDGE #	PDP LINK	EDS LINK	SDS LINK
White	B62W00230		I62W0230C	620203919		620203943	640352621	640374799	TBD			
Blue (OAP)	B62L00230		I62L00230	620203969		620203877	640384921	650412224				
Black	B62BW0230		N/A	N/A		N/A	650696461	650374697				
Red Oxide	B62RW0230		I62RW0230	620203885		N/A	650374499	N/A				
PART B	B62V00230		N/A	N/A		N/A	640352613	640374781				



EPOXY COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Macropoxy 646 Fast Cure	72%	1:1	<250g/l; 2.08 lb/gal	7.0 – 13.5	5.0 – 10.0		R7/K11	35°F min / 250°F max	High solids, high build, fast drying, polyamide epoxy mastic.				
PACKAGE COLOR	REX		KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #			1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Black	B58B00600		I58B00600	620211383	620211391			640310280	64074355				
Mill White	B58W00610		I58W00610	620211508	620211516			640125001	64074686				
Ultra-deep Tint Base	B58T00604		I58T00604	620211482	620211490			640310298	64074348				
Safety Yellow	B58Y00600		I58Y00600	620211524				640330379	640330601				
Safety Red	B58R00600		I58R00600	620211474				640330361	651151755				
Part B Hardener	B58V00600		N/A	N/A	N/A			640125027	64073597				

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Macropoxy 920 PrePrime	100%	3:1	<340g/l; 2.8 lb/gal	1.5 – 2.0	1.5 – 2.0		#54	40°F min / 120°F max	Penetrating epoxy designed for use over marginally prepared steel.				
PACKAGE COLOR	REX		KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #			1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Transparent	B58T00101		I58T00101	620212100	620212118			501218705	64072805	TBD			
Part B	B58V00010		N/A	N/A	N/A			501218713	64072813	N/A			

SHERWIN-WILLIAMS®

FROM SPEC TO PROTECT

SPECIALTY COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Pro-Line 4545 Splash Zone Compound	100%	1:1	<50 g/l; 0.42 lb/gal	1/8" – 2"	1/8" – 2"	N/A	N/A	N/A	2-component epoxy repair compound, developed for emergency repairs.			
PACKAGE COLOR	REX	KIT REX	2-QT KIT SALES #	1-GAL KIT SALES #	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	EDS LINK	SDS LINK
Green Part A	C04545A00	C04545-34	100140854			N/A	N/A	N/A	N/A			
Part B	C04545B00	N/A	N/A	N/A		N/A	N/A	N/A	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Steel-Seam FT910	%	9:1	<	3	2		M	4	100% solids epoxy surfacing compound for steel.			
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	EDS LINK	SDS LINK
White	B58W00910	I58W00910	100140854	620214379		N/A	N/A	N/A	N/A			
Black	B58V00910	N/A	N/A	N/A		N/A	N/A	N/A	N/A			

SOLVENTS

SOLVENT NAME	1-GAL SALES NUMBER			5-GAL SALES NUMBER			SDS	EDS
REDUCER #130 REDUCES: Seaguard 5000 HS	640312914			640312922				
REDUCER #104 / MAK REDUCES: Seaguard 6000	640312337			640312245				
REDUCER #54 REDUCES: Macropoxy 920 Pre-Prime	0015308671			0015308689				
REDUCER #111 REDUCES: Compliant Solvent	501T6436			501248629				
R7K15 REDUCES: Macropoxy PW	640320834			64074389				
MEK REDUCES: Sher-Lovane 800 / Fast Clad Zinc / Tie Coat	001548734			001542414				
VM&P NAPHTHA REDUCES: Seaguard Abative Antifoulant	001548700			001542356				
XYLENE REDUCES: KEM Kromik 150 / KEM Bond Primer	001548684			001542398				

SHERWIN-WILLIAMS®

FROM SPEC TO PROTECT

EPOXY COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Phenicon® HS	75%	4:1	<250 g/l; 2.08 lb/gal	7.0 – 10.0	5.0 – 7.0		#005	35°F min / 120°F max	Thin film, epoxy phenolic novolac lining for tanks, low temp B available			
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	5-GAL KIT SALES #	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	EDS LINK	SDS LINK
Off white	CK920WA11	IK920WA11 I920WA11L (LT)	N/A	620212902 620212910 (LT)		N/A	N/A	600102198	N/A			
Light gray	CK920A175	IK920A175 I920A175L (LT)	N/A	620212795 620212803 (LT)		N/A	N/A	600103321	N/A			
Light blue OAP	CK920L175	IK920L175 I920L175L (LT)	N/A	620212837 620212845 (LT)		N/A	N/A	650018112	N/A			
Part B Part B low temp	CK700C685 CK700C625	N/A	N/A	N/A		N/A	N/A	N/A	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Seaguard® 5000 HS Epoxy	73%	1:1	<250 g/l; 2.08 lb/gal	7.0 – 10.0	5.0 – 10.0		#130	35°F min / 110°F max	Polyamine epoxy, highly surface tolerant, keel to mast epoxy.			
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	EDS LINK	SDS LINK
Red	NI1R00350	II1R00350	620217083	620217091		N/A	N/A	640358115	640351367	102087376		
Black	NI1B00350	II1B00350	620213702	620213710		N/A	N/A	640358123	640350807	N/A		
White	NI1W00350	II1W00350	620217125	620217133		N/A	N/A	640358107	640351375	N/A		
Buff	NI1H00350	II1H00350	620213751	620217067		N/A	N/A	640414579	640414587	N/A		
Gray	NI1A00350	II1A00350	620213686	620213694		N/A	N/A	640356982	640356689	102087384		
Part B	NI1V00350	N/A	N/A	N/A		N/A	N/A	640358131	640350815	N/A		

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Seaguard® 6000	67%	4:1	<300 g/l; 2.50 lb/gal	5.0 – 7.0			#104 R6K30	20°F min / 120°F max	Epoxy Phenalkamine, damp surfaces, keel to mast epoxy.			
PACKAGE COLOR	REX	KIT REX	1.2-GAL KIT SALES #	5-GAL KIT SALES #	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	EDS LINK	SDS LINK
Red	NI1R00400	II1R00400	620217141	620217158		N/A	N/A	640354833	640354841	TBD		
Black	NI1B00400	II1B00400	N/A	620217174		N/A	N/A	640358920	640358990	N/A		
White	NI1W00400	II1W00400	620217216	620213843		N/A	N/A	640360038	640350104	N/A		
Buff	NI1A00400	II1A00400	620217141	620217158		N/A	N/A	640354833	640354841	TBD		
Gray	NI1V00400	N/A	N/A	N/A		N/A	N/A	640360046 (QT)	640350112 (GL)	N/A		
Part B	NI1V00350	N/A	N/A	N/A		N/A	N/A	640358131	640350815	N/A		

SHERWIN-WILLIAMS®

FROM SPEC TO PROTECT



EPOXY COATINGS (CONTINUED)


PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Seaguard 6100	%	4:1	<180g/l; 1.50 lb/gal	7.5 – 15.0	6.0 – 12.0		R6K10	20°F min / 120°F max	Modified high solids epoxy phenalkamine, formulated specifically for immersion and atmospheric service.			
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Black	NTB00450		ITTB0450N	N/A	102717295	N/A	650045180					
Gray	NTIA00450		ITIA0450N	N/A	102717303	N/A	650045032					
Red Oxide	NTIR00450		ITIR0450N	N/A	102717311	N/A	650045057					
Hardener Part B	NTTV00400		N/A	N/A	N/A	640350112 GAL						

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS
Seaguard® Tie Coat	62%	7:1	<340g/l; 2.8 lb/gal	6.0 – 12.0	4.0 – 8.0		MEK	23°F min / 110°F max	An extended overcoat window for anti-foulant application.		
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Gold	P23Y00001	123Y00001	102320009	102245052	65127762	651174153	N/A				
Part B	P23V00001	N/A	N/A	N/A	65127770	651174773	N/A				

SHERWIN-WILLIAMS®

6

FROM SPEC TO PROTECT

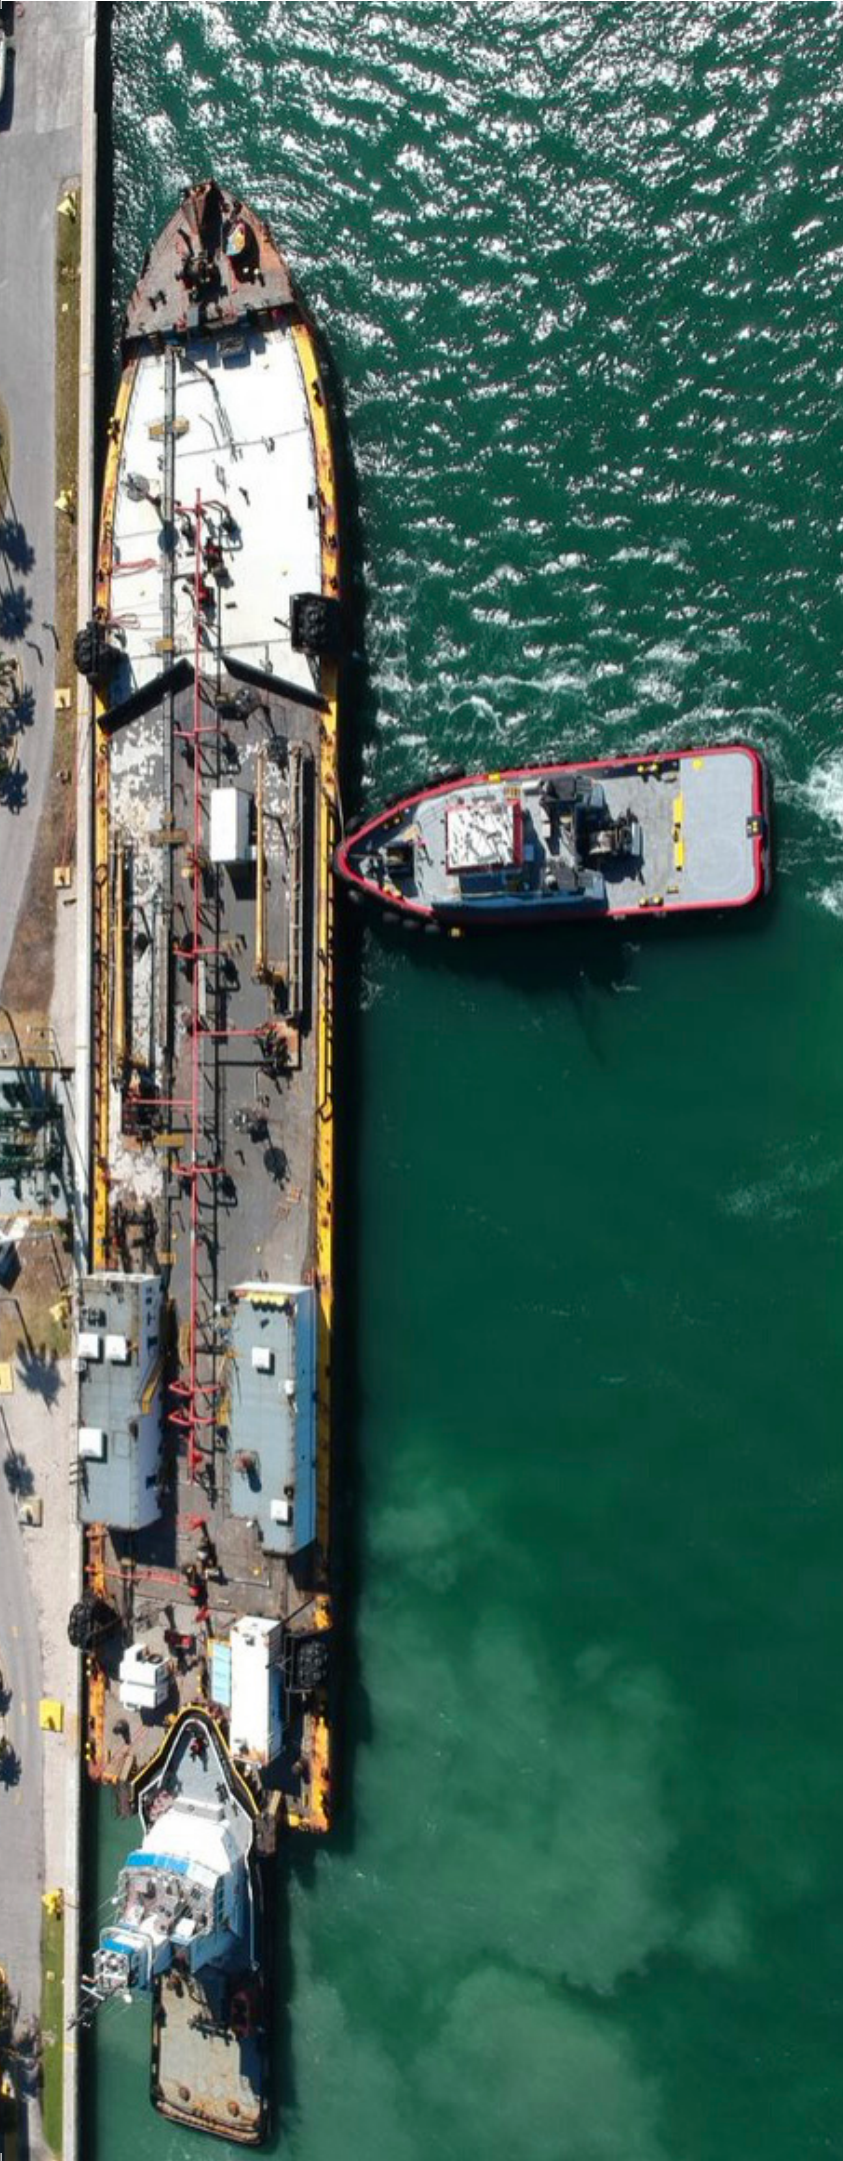

ANTIFOULANT COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT DATA SHEET
Seaguard Soft Copper 1	55%	1	<382g/l; 318 lb/gal	4.5 - 9.0	2.5 - 5.0		Spirits	40°F min / 100°F max	Free eroding copper anti-fouling coating developed for commercial vessels with various activity levels and extended idle times.		
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Red	N50R00101	N/A	N/A	N/A	601132285	N/A					

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Seavoyage® Copper Free AF	65%	N/A	<340g/l; 2.8 lb/gal		3.0 – 6.0		VM8P	40°F min / 100°F max	Copper and tin free ablative AF coating that deters fouling.				
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK				
Black	N51B00301	N/A	N/A	650096944	650096704	N/A							
Red	N51R00301	N/A	N/A	650096951	650096928	N/A							

SHERWIN-WILLIAMS®

15

FROM SPEC TO PROTECT

ZINC COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Zinc Plate™ Ultra II PCP	32.5%	1.74:1	<585g/l; 4.8 lb/gal	15 – 3.6	0.5 – 1.2		#58		Inorganic preconstruction zinc shop primer providing heat resistance up to 1472°F (800°C), excellent welding properties, and resistance to zinc salt formation caused by weathering.				
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Paste - Gray, Part B	B69A00410	I69V00410	N/A	N/A	N/A	620215749	N/A	N/A					
Binder, Part A	B69V00410	N/A	N/A	N/A	N/A	N/A	N/A	N/A					

ANTIFOULANT COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Seaguard 1050 Voidcoat	52%	1	<12g/l; <0.1lb./gal	8.0	4.0		Water	50°F min / 90°F max	Ideal for the tight scale and tight rust conditions normally found on the inner structures of barges and other marine structures.				
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK	
Gray	P31A00011		N/A	N/A		N/A	N/A	101721249	N/A				
Red	P31R00011		N/A	N/A		N/A	N/A	101721264	N/A				

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Seaguard® Ablative AF	65%	N/A	<400g/l; 3.33 lb./gal		2.5 – 5.0		VM&P	Maximum 120°F	AF coating based on a polyamide polymer containing cupricus oxide.				
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	POUCH SALES #		PDP LINK	EDS LINK	SDS LINK	
Black	P30B00012	N/A	N/A	N/A	640355889	1600634	N/A	N/A					
Red	P30R00010	N/A	N/A	N/A	640355186	1600618	N/A	N/A					

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Seaguard® Copper Bottom #45	53%	N/A	<400g/l; 3.33 lb./gal	4.0 – 5.0	2.0 – 2.5		Xylene	50°F min / 120°F max	Semi-hard, anti-fouling developed for the shallow draft trade.				
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Black	N51B00045	N/A	N/A	N/A	640345914	640345922	N/A	N/A					
Red	N51R00045	N/A	N/A	N/A	640345898	640345906	N/A	N/A					

SHERWIN-WILLIAMS®

FROM SPEC TO PROTECT



EPOXY COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Sherglass® Flake Filled	76% ±2%	4:1	<250g/l; 2.08 lb./gal	10.0 – 26.0	8.0 – 20.0		R2K4	40°F min / 120°F max	Glass flake reinforced amine epoxy coating designed for immersion service.				
PACKAGE COLOR	REX	KIT REX	5-GAL KIT SALES #	1-GAL SALES #	4-GAL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK				
Black	B62B00525	I62B00525-WE I62B0525L-WE	620214064 620214072	N/A	N/A	640365821	N/A						
Haze Gray	B62A00525	I62A00525-WE I62A0525L-WE	620214049 620214056	N/A	N/A	640375978	N/A						
Red Oxide	B62R00525	I62R00525-WE I62R0525L-WE	620214080 620214098	N/A	N/A	640365862	N/A						
White OAP	B62W00525	I62W00525-WE I62W0525L-WE	620214106 620214114	N/A	N/A	640416723	N/A						
Standard Part B	B62V00525	N/A	N/A	N/A	N/A	640365805	N/A						
Low Temp Part B	B62V00526	N/A	N/A	N/A	N/A	640365813	N/A						

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
SherPlate 600	89%	4:1	<100g/l; 0.08 lbs./gal	5.0 – 11.0	3.0 – 10.0		MEK	35°F min / 120°F max	High solids, epoxy phenalkamide lining that meets both the health effects and testing requirements of NSF/ANSI/CAN 61.				
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #			1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Red	B58R00681		I58R00681 I58R0681L	102672599 102672607	102671690 102671708			651276982	651207664				
Beige	B58HW0681		I58HW0681 I58HW681L	102672656 102672664	102672573 102672581			651282386	651282394				
Light Blue	B58LW0681		I58LW0681 I58LW681L	102672615 102672623	102671716 102671724			651276990	651207680				
Mill White	B58W00681		I58W00681 I58W0681L	102672631 102672649	102671732 102672565			651277006	651277014				
Hardener Part B	B58V00680		N/A	651277030 QT	651207698 GAL		N/A	N/A	N/A				
Low Temp Part B	B58V00681		N/A	651277048 QT	651207706 GAL		N/A	N/A	N/A				

SHERWIN-WILLIAMS®

FROM SPEC TO PROTECT



EPOXY COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
SherPlate PW	100%	1:1	<85 g/l; 0.71 lb/gal	18.0 – 22.0	18.0 – 22.0		MEK1	40°F min / 110°F max	Edge retentive, ultra high solids epoxy.		EDS LINK	SDS LINK
PACKAGE COLOR	REX		KIT REX	10-GAL KIT SALES #	2-GAL KIT SALES #	10-GAL KIT SALES #	REDUCER	5-GAL SALES #	DRUM SALES #	CARTRIDGE #	PDP LINK	SDS LINK
White	B62W00260		162W00260	620214189		100632819		650339526	650394703			
Blue	B62L00260		162L00260	620214148		N/A		650339518	N/A			
Part B	B62V00260		N/A	N/A		N/A		650339542	650394737			
Part B OAP	B62V00265		162W0260P (WHITE) 162L0260P (BLUE)	620214197 (WHITE) 620214155 (BLUE)		100633254 (WHITE)		650367261	N/A			

SINGLE COMPONENT COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Cordthane® IHS B65W00051	65%	1	<30g/l; 2.6 lb/gal	3.5 – 5.0	2.0 – 3.0		#15	20°F min / 100°F max	1 component, moisture curing urethane designed for low temperature.		EDS LINK	SDS LINK
PACKAGE COLOR	REX		KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	REDUCER	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Extra White	B65W00051		N/A	N/A		N/A		640374872	N/A			
Pastel TB	B65WX0051		N/A	N/A		N/A		650383003	640338620			
Ultra-deep TB	B65TX0054		N/A	N/A		N/A		650383011	640338687			
Black	B65B00050		N/A	N/A		N/A		650356363	N/A			
Safety Yellow	B65Y00050		N/A	N/A		N/A		640349320	N/A			
Safety Red	B65R00050		N/A	N/A		N/A		640349312	N/A			

SHERWIN-WILLIAMS®

FROM SPEC TO PROTECT

ZINC COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Fast Clad® Zinc HS	62%	9:1	<50g/l; 2.50 lb/gal	3.0 – 6.5	2.0 – 4.0		MEK	40°F min / 120°F max	Inorganically reinforced zinc rich primer.		EDS LINK	SDS LINK
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	REDUCER	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Gray / Green A	B69A00352		169A00352	N/A	620204180	N/A		640360483	TBD			
Part B	B69V00352		N/A	N/A		N/A		640360491	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Zinc Clad® II Plus	76%	3:66	<340g/l; 2.8 lb/gal	3.0 – 6.0	2.0 – 4.0		R7K111	20°F min / 130°F max	Three-component, inorganic ethyl silicate, zinc rich coating. This is fast drying, high solids, low VOC coating with 85% by weight, of zinc in the dry film.		EDS LINK	SDS LINK
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	REDUCER	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Gray-Green Base, Part A	B69VZ0012		169VZ0012	N/A	100667286	N/A		640350856	N/A			


PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Zinc Clad® IV	68%	8:1	<340g/l; 2.8 lb/gal	5.0 – 8.0	3.0 – 5.0		MEK	40°F min / 120°F max	A two-component, polyamide epoxy, zinc- rich coating. It contains 85% by weight of zinc dust pigment in the dried film.		EDS LINK	SDS LINK
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	REDUCER	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Gray / Green Binder U	B69A00008		620215616	N/A		N/A		006301147	N/A			
Hardener Part V	B69V00008		N/A	N/A		N/A		006301154	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Zinc Clad® 4100	74%	3	<340g/l; 2.80 lb/gal	4.0 – 7.0	3.0 – 5.0		MEK	35°F min / 120°F max	Three-component, polyamide epoxy, zinc rich coating. It contains 89.2% by weight of zinc dust pigment in its dry film.		EDS LINK	SDS LINK
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	REDUCER	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Gray-Green Base, Part A	B69A00120		169A00120	651020539	104444206	10444198		651021818	N/A			
Hardener, Part B	B69V00120		N/A	N/A		N/A		651020554	N/A			
Zinc Dust	B69D00011		N/A	N/A		N/A		006304232	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Zinc Plate® 3100		1:1	<0g/l; 0 lb/gal	1.7	0.6		Water		Two-package, waterborne, inorganic zinc pre-construction primer designed to provide excellent welding and weathering properties.		EDS LINK	SDS LINK
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	REDUCER	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Gray	B69V00480		169V00480	N/A	620215665	N/A		650391402	N/A			
Keg	B69D00480		N/A	N/A		N/A		650386196	N/A			

SHERWIN-WILLIAMS®

FROM SPEC TO PROTECT

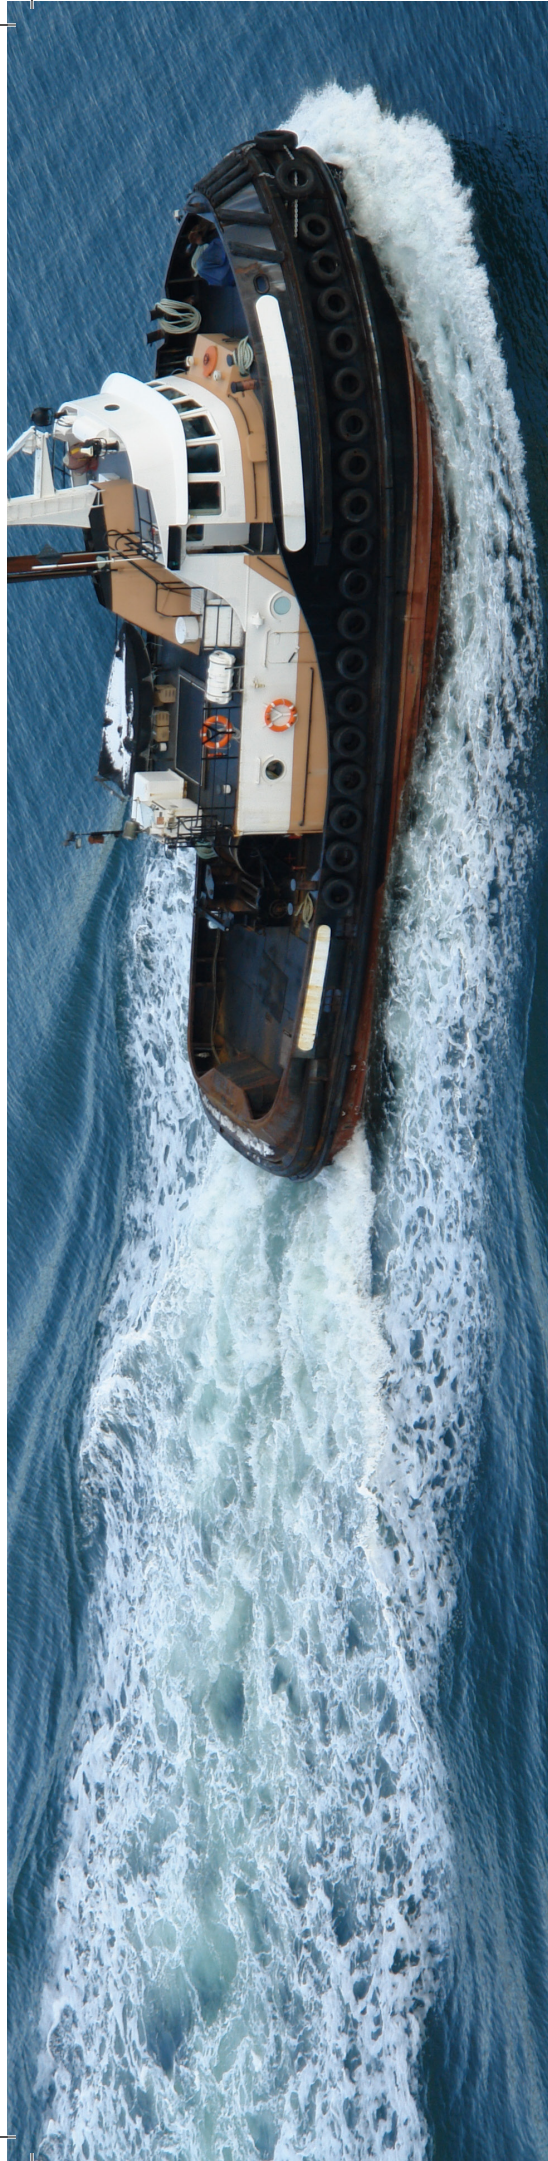

TWO-COMPONENT FINISH COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Sher-Loxane 800 Polysiloxane	90%	4:1	<100g/l; 0.77 lb/gal	5.0 – 7.0	4.0 – 6.0		MEK	20°F min / 120°F max	DTM epoxy siloxane hybrid with a Low Temp Part B – immersion grade.			
PACKAGE COLOR	REX		KIT REX	1.25-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL KIT SALES #	REDUCER	TEMPERATURE RANGE	POUCH SALES #	PAIL SALES #	PDP LINK	SDS LINK
White TB	B80W00501		180W00501 180W0501F	101271088 101967180	101271096 101967198	650972383		650972383	650972425	102153087		
Ultra-deep TB	B80T00504		180T00504 180T0504F	101271062 101967206	101271070 101967214	650972375		650972375	650972391	N/A		
Safety Yellow	B80YW0500		180YW0500 180YW500F	101446730 101964872	101446722 101964890	650160605		650160605	651021123	N/A		
Safety Red	B80RW0500		180RW0500	101446748	N/A	N/A		651023897	N/A	N/A		
Black	B80B500		180B00500 180B0500F	101561223 102099835	101683969 102099843	651045544		651045544	651067696	102153095		
Part B	B80V00500		N/A	N/A	N/A	N/A		650977184 (QT) 651124158 (QT)	650972433 651124166	N/A		
Part B Low Temp	B80V00502											

ZINC COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Corithane® Galepac 1K	67%	1	<300g/l; 2.5 lb/gal	4.5 – 6.8	3.0 – 4.0		R7K15	20°F min / 120°F max	Moisture curing urethane, zinc-rich primer. Designed for low temperature application to steel surfaces. Low temperature application.			
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL KIT SALES #	REDUCER	TEMPERATURE RANGE	POUCH SALES #	PAIL SALES #	PDP LINK	SDS LINK
Gray	B65G00011		N/A	N/A	N/A	N/A		N/A	640316436	N/A		
Green	B65GG0011		N/A	N/A	N/A	N/A		N/A	650924897	N/A		
Red	B65RW0011		N/A	N/A	N/A	N/A		N/A	650197544	N/A		

SHERWIN-WILLIAMS®

FROM SPEC TO PROTECT



SINGLE COMPONENT COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Industrial Enamel	43%	9:1	<441ppb; 3.68 lb/gal	4.5 – 9.0	1.9 – 3.9		NR	40°F min / 120°F max	Medium oil-alkyd all-purpose enamel, designed for interior and exterior use.			
PACKAGE COLOR	REX		1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL KIT SALES #	5-GAL KIT SALES #	REDUCER	TEMPERATURE RANGE	POUCH SALES #	PAIL SALES #	PDP LINK	SDS LINK
Black	B54B00011		006170203	006170211	N/A	N/A		N/A	N/A	N/A		
Deep Base	B54W00113		640517736	640517744	N/A	N/A		N/A	N/A	N/A		
Pure White	B54W00101		790799993	791299993	N/A	N/A		N/A	N/A	N/A		
Ultra-deep	B54T00104		796999993	797499993	N/A	N/A		N/A	N/A	N/A		
Safety Red	B54R00038		006174064	640144341	N/A	N/A		N/A	N/A	N/A		
Safety Yellow	B54Y00037		006174072	640144358	N/A	N/A		N/A	N/A	N/A		
Safety Orange	B54E00039		006174056	640144325	N/A	N/A		N/A	N/A	N/A		

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
KEM Bond HS Alkyd Primer	60% ±2%	1	336g/l; 2.81 lb/gal	3.0 – 8.0	1.8 – 4.8		Xylene	40°F min / 120°F max	Fast drying, rust inhibitive, universal phenolic alkyd metal primer.			
PACKAGE COLOR	REX		1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL KIT SALES #	5-GAL KIT SALES #	REDUCER	TEMPERATURE RANGE	POUCH SALES #	PAIL SALES #	PDP LINK	SDS LINK
Gray	B50AZ0008		640344966	640344974	N/A	N/A		N/A	N/A	N/A		
Off White	B50WZ0004		006304539	640167151	N/A	N/A		N/A	N/A	N/A		
Red Oxide	B50NZ0003		006304521	006304497	N/A	N/A		N/A	N/A	N/A		

SHERWIN-WILLIAMS®

FROM SPEC TO PROTECT

SINGLE COMPONENT COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
KEM Kromik Universal Primer	%	9:1	<389g/l; 3.24 lb/gal	6.0 – 8.0	3.2 – 4.2		Xylene	40°F min / 120°F max	Rust inhibiting, modified phenolic alkylid resin primer can be used as a universal primer under high performance topcoats.			
PACKAGE COLOR	REX		1-GAL KIT SALES #	5-GAL KIT SALES #				N/A	N/A	PDP LINK	EDS LINK	SDS LINK
Brown	B50NZ0006		640111746	640111753				N/A	N/A			
Gray	B50AZ0006		640348033	640348041				N/A	N/A			
Off White	B50WZ0001		640115325	640115333				N/A	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
KEM Kromik 150 Alkyd	61%	1	<340g/l; 2.8 lb/gal	3.5 – 7.0	2.0 – 4.0		Xylene	40°F min / 120°F max	High solids, alkyd, gloss topcoat.			
PACKAGE COLOR	REX		KIT REX	2-GAL KIT SALES #				1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	SDS LINK
White TB	N41W00651		N/A	N/A				650426737	650426745	N/A		
Ultra-deep TB	N41T00654		N/A	N/A				650465107	650465115	N/A		
Black	N41B00650		N/A	N/A				651020331	651020349	N/A		
Yellow	N41Y00650		N/A	N/A				651020406	651124844	N/A		
Signal Red	N41R00650		N/A	N/A				651020356	N/A	N/A		

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Pro Industrial Precat	%	1	<50gpl; 0.42 lb/gal	4.0	1.3		Water	50°F min / 120°F max	Single-component pre-catalyzed waterborne acrylic epoxy.			
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #				1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	SDS LINK
Extra White - Semigloss	K45W00151		N/A	N/A				650984016	650984024	N/A		
Deep Base - Semigloss	K45W00153		N/A	N/A				650984032	650984040	N/A		
Ultra-deep - Semigloss	K46T00154		N/A	N/A				650984057	650984065	N/A		

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Proline 1000	48%	1	<420g/l; <3.5 lb/gal	3.0 – 4.0	1.5 – 2.0		Spirits	40°F min / 100°F max	Formulated to be mildew resistant, washable, provide a gloss of over 85% at 60° and offers excellent non-yellowing characteristics.			
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #				1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	SDS LINK
White	C00100000		N/A	N/A				008220337	008220352	N/A		
Tint Base	C0010008T		N/A	N/A				008222119	008222101	N/A		
Ultra-deep Base	C001000DD		N/A	N/A				008222135	008222143	N/A		
Black	C00100010		N/A	N/A				008220485	N/A	N/A		

SHERWIN-WILLIAMS®

FROM SPEC TO PROTECT

TWO-COMPONENT FINISH COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Acrolon 218 Gloss	65%	6:1	<300g/l; 2.5 lb/gal	4.5 – 9.0	4.0 – 6.0		#58 / MEK	35°F min / 120°F max	Polyester modified, aliphatic, acrylic polyurethane / "workhorse".			
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #				1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	SDS LINK
Extra White TB	B65W00611		I65W00611	620204859				640516357	640516365	TBD		
Ultra-deep TB	B65T00604		I65T00604	620204834				640312484	640122313	N/A		
Safety Yellow	B65Y00600		I65Y00600	620204917				640312518	640131348	N/A		
Safety Red	B65R00600		I65R00600	620204735				640312500	N/A	N/A		
Black	B65B00600		I65B00600	620204420				640312492	640131322	TBD		
Part B	B65V00600		N/A	N/A				640312526 (QT)	64013704 (GI)	N/A		

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Ht-Solids Polyurethane 250	63%	4:1	<250g/l; 2.08 lb/gal	4.5 – 8.0	3.0 – 5.0		R7K111	20°F min / 120°F max	Low VOC aliphatic, acrylic polyurethane resin coating.			
PACKAGE COLOR	REX		KIT REX	1.25-GAL KIT SALES #				1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	SDS LINK
White TB	B65WJ0311		I65WJ0311	620211444				601528128	601528136	TBD		
Ultra-deep TB	B65TWJ304		I65TWJ304	62021128				601316011	601316029	N/A		
Safety Yellow	B65YWJ337		I65YWJ337	62021185				601539588	N/A	N/A		
Safety Red	B65RWJ338		I65RWJ338	62021110				601539620	N/A	N/A		
Part B	B60V00030		N/A	N/A				6304141 (QT)	6304281	N/A		

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Pro Industrial Acrolon 100	45%	4:1	<98g/l; 0.82 lb/gal	4.0 – 8.0	1.8 – 3.6		Water	55°F min / 120°F max	An advanced technology, less than 100 grams per litre VOC, waterbased, acrylic urethane. High gloss, abrasion resistant and excellent weathering properties.			
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #				1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	SDS LINK
Extra White	B65W00721		I65W00721	620215178				650022544	650022551	N/A		
Ultra-deep Base	B65T00724		I65T00724	620215152				650022569	650022577	N/A		
Safety Yellow	B65Y00720		I65Y00720	620215210				650023997	N/A	N/A		
Hardener	B65V00720		N/A	N/A				650022595	650022593	N/A		

SHERWIN-WILLIAMS®

FROM SPEC TO PROTECT