

GASKETED AND WELDED  
HEAT EXCHANGERS  
FOR EVERY NEED


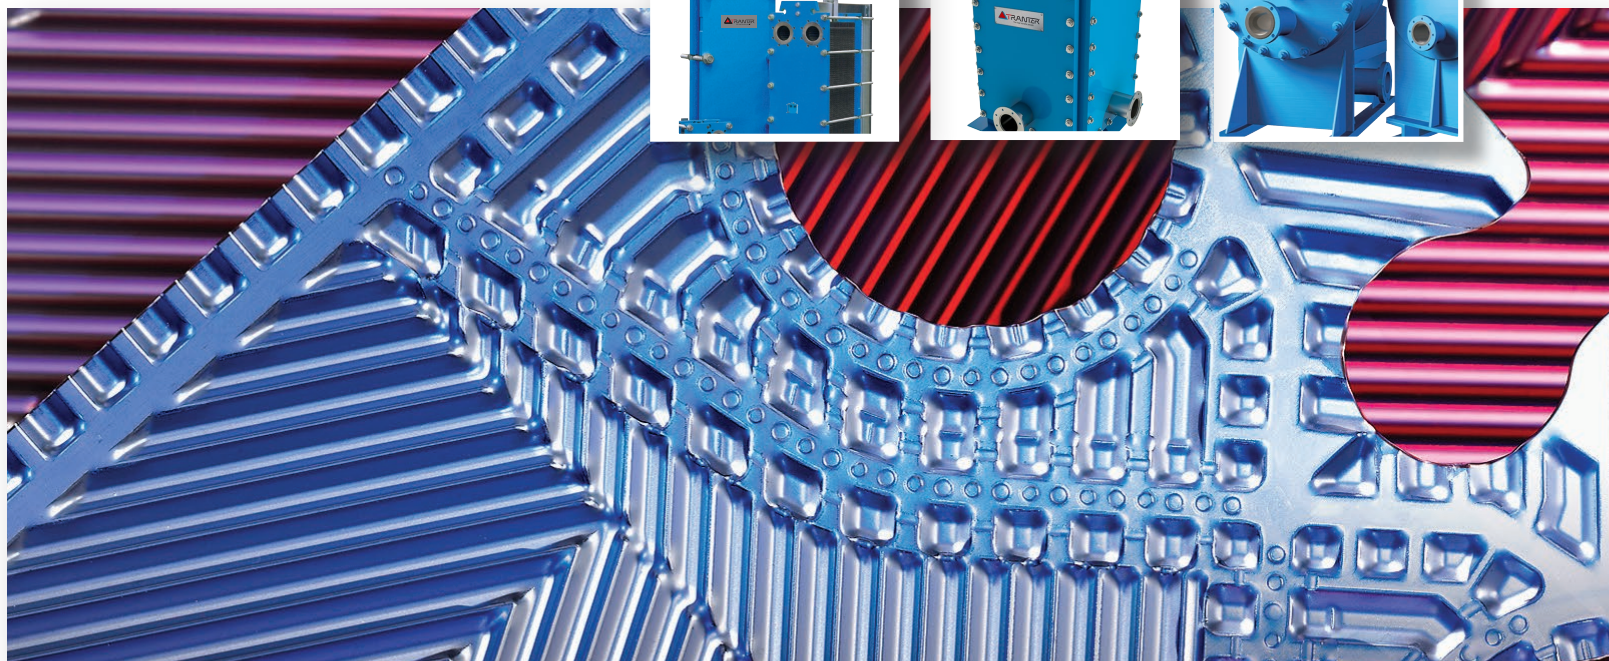


Plate & Frame  
Heat Exchanger


Welded Plate  
Heat Exchanger



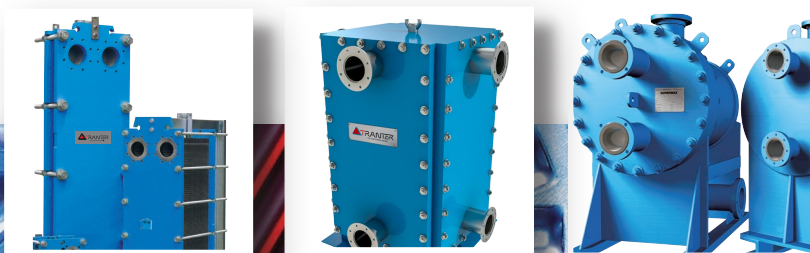

## Gasketed Plate Heat Exchangers

Tranter provides the world's largest range of Plate Heat Exchangers (PHEs) for a variety of applications. The PHEs are built on a module-based concept and are designed to provide maximum efficiency in transferring heat from one liquid to another, or from steam to liquid. Frames, plates and connections can be combined to form a number of different exchanger types. By using different types of plates, with different characteristics, the heat exchangers can be adapted to a wide variety of applications. The benefit of the gasketed plate heat exchanger is that it can easily be expanded or adapted, by adding or replacing plates when conditions change.

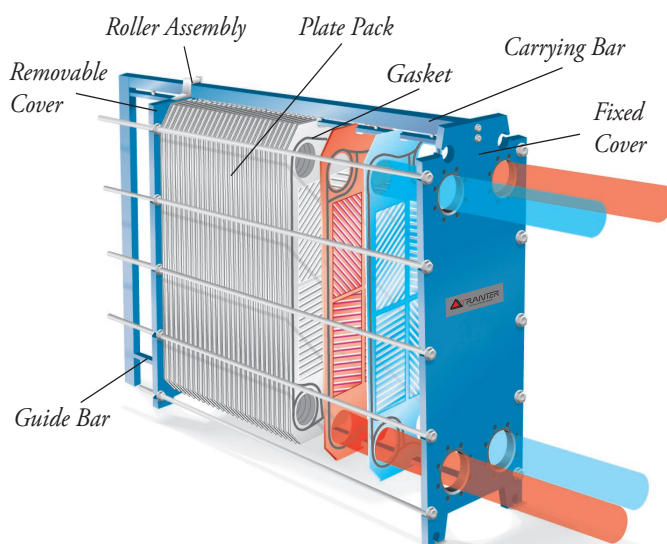


|                    |                               |
|--------------------|-------------------------------|
| Flow ranges:       | 0 – 4600 m <sup>3</sup> /h    |
| Max work pressure: | 25 bar                        |
| Temp. range:       | -40°C to +180°C               |
| Connections:       | DN25 – DN500                  |
|                    | Weld neck, flange or threaded |

*Specifications may be changed without prior notice. Please contact us for specific details.*







# Gasketed Plate Heat Exchangers

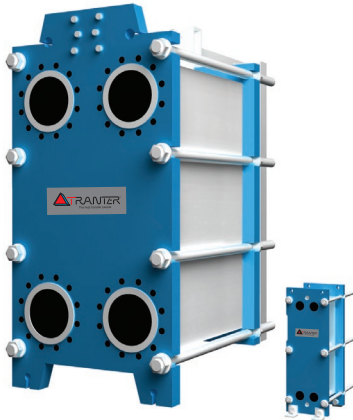

## GC and GL Plates



Symmetrical plates for regular use. Different plate patterns allow for optimisation of thermal transfer or pressure drop.

An obtuse angle (high-theta plate) gives high resistance and an acute angle (low-theta plate) a low pressure drop.

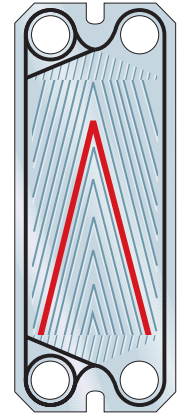
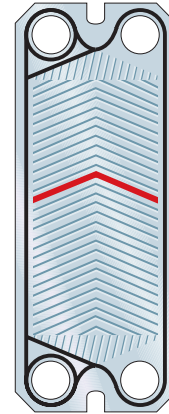


## GX Ultraflex Plates


The plates are available with a herringbone pattern and either an acute or obtuse angle, making it possible to achieve six channel combinations.

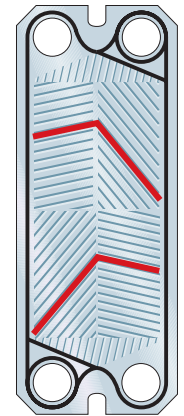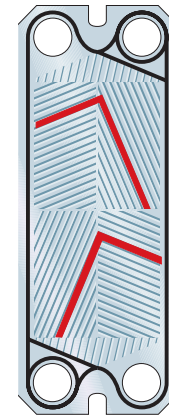


*The Ultraflex design allows two plates to be turned and rotated, giving six combinations of high- and low-theta plate pairs, matching the performance parameters of your application.*




HS=  
High -theta,  
same direction




HD=  
High -theta,  
different directions




MS=  
Medium-theta,  
same direction

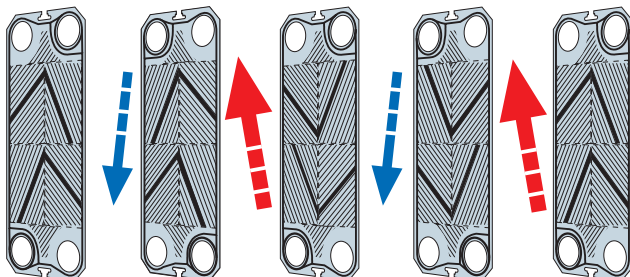


*Ultraflex allows asymmetrical designs, with the primary and secondary circuits designed for heat transfer efficiency.*



LS=  
Low -theta,  
same direction



LD=  
Low -theta,  
different directions




MD=  
Medium-theta,  
different directions



### GD Double Wall Plates


Two plates laser-welded together for optimal safety. For applications such as the pharmaceutical industry, food industry, district heating, cooling of transformer oil etc., where it is vital that media are not mixed.

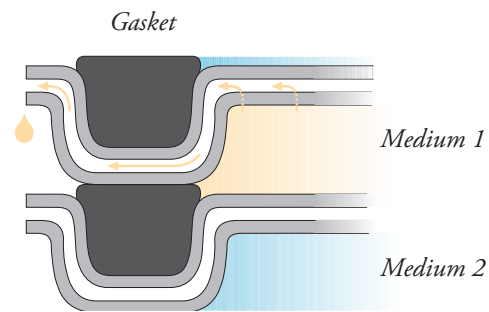

*Even if medium 1 should leak, it cannot mix with medium 2.*

### GF Wide Gap Plates

Plates with wide channels for fibre- and particle-rich fluids. The plate pattern is optimised for cooling applications to give high thermal efficiency even with asymmetrical flows.

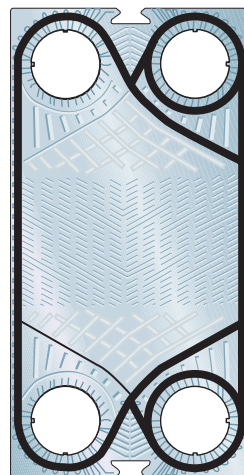


*Wide/Narrow*





*Medium/Medium*

### GW Semi Welded Plates

With a sealed channel for ammonia and other fluids. The plate pattern is optimised for cooling applications to give high thermal efficiency even with asymmetrical flows.

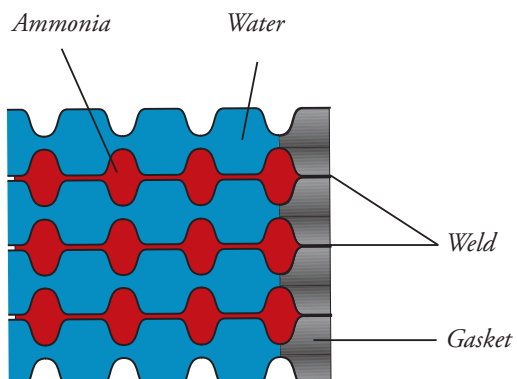

*The plate pairs are welded together to form a sealed channel for ammonia or other fluids.*

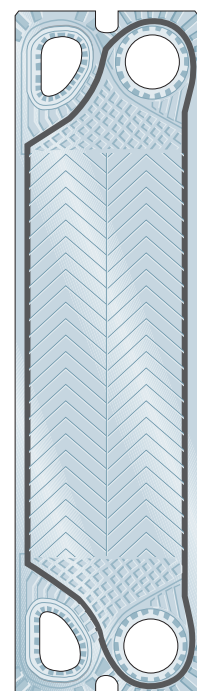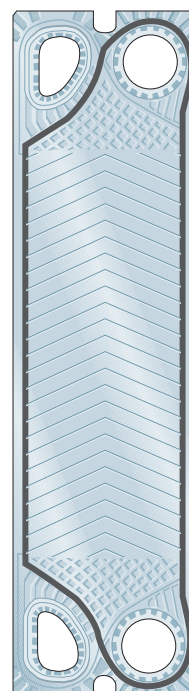

# Welded Heat Exchangers







## SUPERMAX®

All-welded plate heat exchangers for high performance in industrial applications.

Can be manufactured from dissimilar materials when only one side will be exposed to corrosive conditions.

|                           |                                      |
|---------------------------|--------------------------------------|
| <i>Maxflow:</i>           | <i>No real limitation*</i>           |
| <i>Max work pressure:</i> | <i>100 bar</i>                       |
| <i>Temp. range:</i>       | <i>-195°C to +900°C</i>              |
| <i>Connections:</i>       | <i>DN25 – DN700</i>                  |
|                           | <i>Weld neck, flange or threaded</i> |

*\* No upper limitation as elements can be connected in parallel within the unit.*

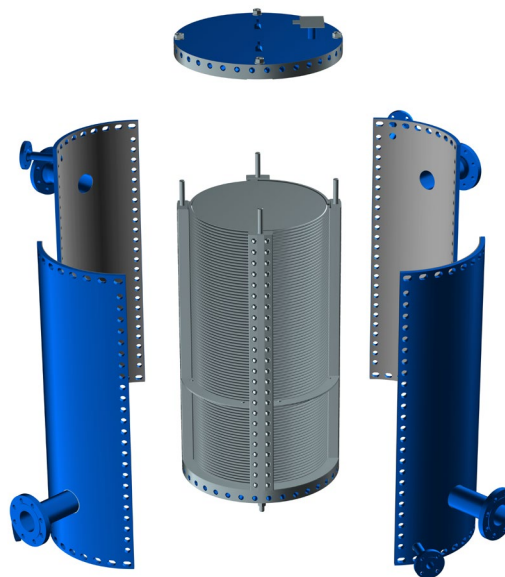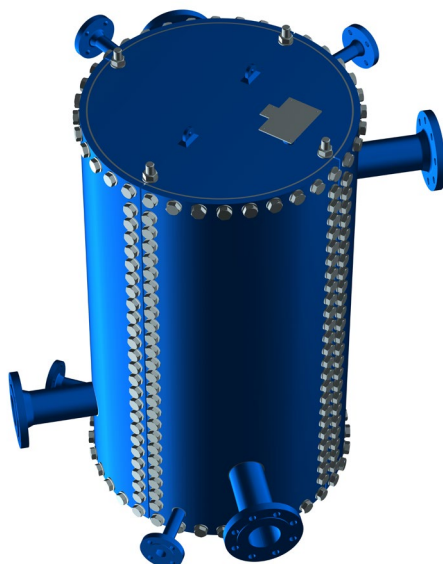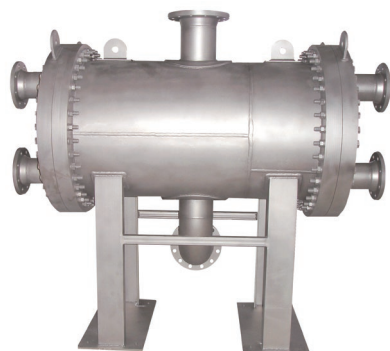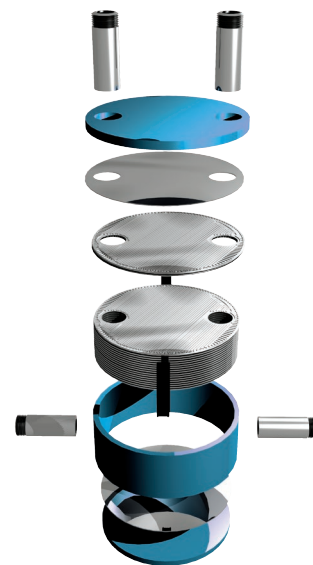







### NOVUSBLOC® Welded Exchanger

Available for global energy intensive markets the NovusBloc® welded plate heat exchanger encompasses a Tranter premium design concept offering a significant boost in heat exchange performance and durability for these processes.

The NovusBloc is fully accessible for mechanical cleaning and visual inspection making it our customers' first choice of heat exchanger for applications with high fouling tendency.

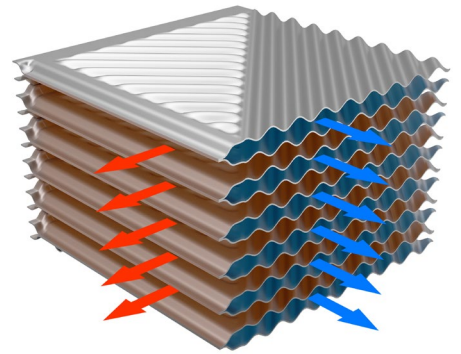


|                    |                     |
|--------------------|---------------------|
| Maxflow:           | No real limitation* |
| Max work pressure: | 42 bar              |
| Temp. range:       | -50°C to +375°C     |
| Connections:       | DN150- DN1000       |

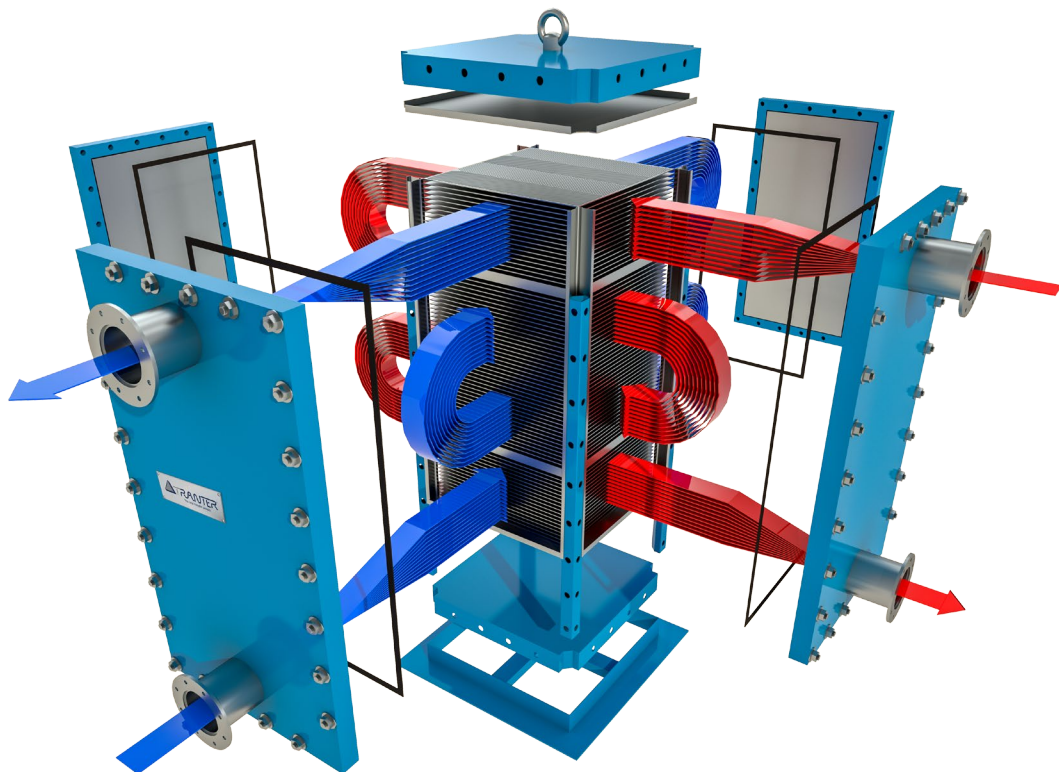

## Welded Heat Exchangers

Compact heat exchangers for extreme temperatures, pressures and special designs that exceed gasket limitations. They offer high performance, small sizes, and minimal maintenance. The exchangers can handle liquids, gases, and two-phase mixtures at very high pressures and at low and high temperatures. They are manufactured to meet customer needs for the highest quality and efficiency.

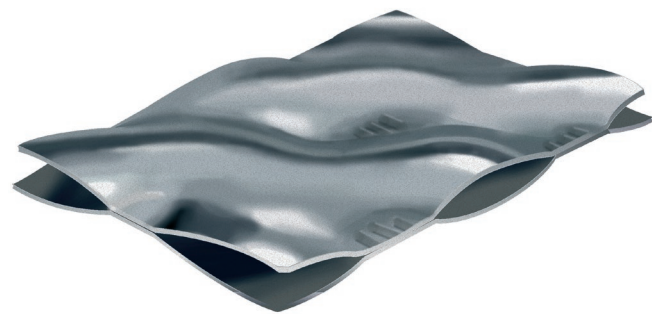

*The welded, sealed channels reduce the risk of intermixing fluids.*



At the forefront of heat exchanger technology for more than 85 years

Tranter top quality, high-performance, proprietary products are on the job in demanding industrial and commercial installations around the world. Backed by our comprehensive experience and worldwide presence, Tranter offers you exceptional system performance, applications assistance and local service. Tranter is close to its customers, with subsidiary companies, agents, distributors and representatives located worldwide. Contact us for a qualified discussion of your needs.



North America

Tranter, Inc.  
Texas, USA  
Tel: +1 940 723 7125  
E-mail: [sales@tranter.com](mailto:sales@tranter.com)

India

Tranter India Pvt. Ltd.  
Pune, India  
Tel: +91 2137 392300  
E-mail: [salesindia@tranter.com](mailto:salesindia@tranter.com)

South America

Tranter Indústria e Comércio de Equip. Ltda  
São Paulo, Brazil  
Tel: +1 940 723 7125  
E-mail: [brasilsales@tranter.com](mailto:brasilsales@tranter.com)

China

Tranter Heat Exchangers Co. Ltd.  
Beijing, P.R., China  
Tel: +86 1064379490  
E-mail: [info\\_cn@tranter.com](mailto:info_cn@tranter.com)

EMEA

Tranter International AB  
Vänersborg, Sweden  
Tel: +46-521-79 98 00  
E-mail: [sales.support.europe@tranter.com](mailto:sales.support.europe@tranter.com)

South East Asia & Oceania

Tranter Heat Exchangers  
Singapore, Singapore  
Tel: +65-8299-2212  
E-mail: [info\\_sea@tranter.com](mailto:info_sea@tranter.com)