



KÆDER / TILBEHØR / CHAINS & FITTINGS

Kroge

Topkroge, GrabiQ, enkelt	1-8
Topkroge, GrabiQ, enkelt	1-8
Topkroge, GrabiQ, duo	1-9
Topkroge, GrabiQ, duo	1-9
Topkroge, GrabiQ, enkelt	1-9
Topkroge, GrabiQ, duo	1-10
Sikkerhedskroge, GrabiQ	1-10
Sikkerhedskroge, GrabiQ	1-10
Svivel sikkerhedskroge, GrabiQ	1-11
Svivel sikkerhedskroge, GrabiQ	1-11
Sikkerhedskroge, GrabiQ	1-11
Sikkerhedskroge, GrabiQ	1-12
Lastkroge, GrabiQ	1-12
Lastkroge med pal, GrabiQ	1-12
Rundslingskroge, GrabiQ	1-13
Støberikroge, GrabiQ	1-13
Opkorterkrøge med gaffel, GrabiQ	1-13
Opkorterkrøge, GrabiQ type OG	1-14
Kædeopkortere, GrabiQ type MIG CC	1-15
Lastkroge med pal, Gunnebo	1-18
Opkorterkrøge med øje, Gunnebo type OG	1-20
Glidekrøge, Gunnebo	1-21
Containerkrøge, Gunnebo	1-21
Gravemaskinekrøge, Gunnebo	1-22
Sikkerhedskroge, YellowLine, type CSK, klasse 10	1-24
Lastkroge med pal, YellowLine, type CLK klasse 10	1-24
Opkorterkrøge, YellowLine, type COK, klasse 10	1-24
Sikkerhedskroge, YellowLine	1-26
Lastkroge, YellowLine	1-26
Opkorterkrøge, YellowLine	1-26
Gravemaskinekrøge, YellowLine	1-27
Tromlekrøge, Crosby	1-27
Kædeopkortere, RUD type ICE-IMVK	1-31
Opkorterkrøge, RUD type ICE-IVH, klasse 12	1-32
Lastkroge med pal, RUD	1-32
Sikkerhedskroge, RUD	1-33
Støberikroge, RUD	1-33
Komplet program i rustfri udførelse	1-44
Opkorterkrøge, rustfrie, cromox® CVE, klasse 6, AISI 318LN	1-46
Lastkroge, rustfrie, cromox® CGHF, klasse 6	1-47
Lastkroge, rustfrie, cromox® COHF, klasse 6	1-47
Svivelastkroge, rustfrie, cromox® CWHB	1-47

Svirvler

Kuglelejesvirvler, isolerede, Gunnebo	1-18
---------------------------------------	------

Kæder

Belastningstabel kædesæt, klasse 10	1-1
Kæder, GrabiQ, klasse 10	1-2
Kæder, klasse 8	1-2
Gunnebo kædesæt	1-3
Gunnebo kædesæt	1-4
GrabiQ FlexiLeg	1-5
Kædesæt, GrabiQ	1-6
Belastningstabel kædesæt, klasse 8	1-16

Hooks

Mastergrabs, GrabiQ	1-8
C-grabs, GrabiQ	1-8
Mastergrabs, GrabiQ, duo	1-9
C-grabs, GrabiQ, duo	1-9
C-loks, GrabiQ	1-9
C-loks, GrabiQ, duo	1-10
Self locking hooks, GrabiQ	1-10
Self locking hooks, GrabiQ	1-10
Swivel safety hooks, GrabiQ	1-11
Swivel safety hooks, GrabiQ	1-11
Safety hooks, GrabiQ	1-11
Sling hooks, GrabiQ	1-12
Sling hooks, GrabiQ	1-12
Sling hooks with latch, GrabiQ	1-12
Roundsling hooks, GrabiQ	1-13
Foundry hooks, GrabiQ	1-13
Grab hooks with fork, GrabiQ	1-13
Grab hooks, GrabiQ type OG	1-14
Midgrab shorteners, GrabiQ type MIG CC	1-15
Sling hooks with latch, Gunnebo	1-18
Grab hooks, Gunnebo	1-20
Choker hooks, Gunnebo	1-21
Container hooks, Gunnebo	1-21
Weld-on-hooks, Gunnebo	1-22
Clevis self locking hooks, YellowLine, type CSK, grade 10	1-24
Clevis sling hooks with latch, YellowLine, type CLK, grade 10	1-24
Eye grab hooks, YellowLine, type COK, grade 10	1-24
Clevis self locking hooks, YellowLine	1-26
Clevis sling hooks, YellowLine	1-26
Eye grab hooks, YellowLine	1-26
Weld-on-hooks, YellowLine	1-27
Barrel hooks, Crosby	1-27
Midgrab shorteners, RUD type ICE-IMVK	1-31
Shortening hooks, RUD type ICE-IVH, grade 12	1-32
Sling hooks with latch, RUD	1-32
Clevis self locking hooks, RUD type ICE-IAGH, grade 12	1-33
Foundry hooks, RUD	1-33
Complete stainless program	1-44
Shorteners, stainless, cromox® CVE, grade 6, AISI 318LN	1-46
Clevis hooks, stainless, cromox® CGHF, grade 6	1-47
Eye hooks, stainless, cromox® COHF, grade 6	1-47
Swivel load hooks with eyelet, stainless, cromox® CWHB	1-47

Swivels

Insulated ball bearing swivels, Gunnebo	1-18
---	------

Chains

Load table chain slings, grade 10	1-1
Chains, GrabiQ, grade 10	1-2
Chains, grade 8	1-2
Gunnebo chain slings	1-3
Gunnebo chain slings	1-4
GrabiQ FlexiLeg	1-5
Chain slings, GrabiQ	1-6
Load table chain slings, grade 8	1-16



KÆDER & TILBEHØR / CHAINS & FITTINGS

1

Kæder, YellowLine, klasse 10	1-23
Kæder, YellowLine klasse 8	1-25
RUD-ICE, Klasse 12	1-28
Kæder, RUD, ICE-IMK klasse 12	1-29
Kæder, kortleddet	1-41
Kæder, langleddet	1-41
Belastningstabel, cromox®	1-45
Kæder, rustfrie, cromox® CK	1-45
Pumpekæder, rustfrie, cromox® CPK, klasse 6	1-49
BEMA®, TITAN, kædelås	1-50
BEMA®, TITAN, dacromet, kædelås	1-50

Chains, YellowLine, grade 10	1-23
Chains, YellowLine grade 8	1-25
RUD-ICE, Grade 12	1-28
Chains, RUD, ICE-IMK grade 12	1-29
Chains, short-link	1-41
Chains, long-link	1-41
Load table, cromox®	1-45
Chains, stainless, cromox® CK	1-45
Pump chains, stainless, cromox® CPK, grade 6	1-49
BEMA®, TITAN, chain lock	1-50
BEMA®, TITAN, dacromet, chain lock	1-50

Ringe

Firkantringe, GrabiQ type MFH klasse 10	1-6
Garnitureringe, GrabiQ type MT	1-7
Ovalringe, GrabiQ, overstørrelse	1-7
Ovalringe, GrabiQ type MF	1-7
Ovalringe, GrabiQ type M	1-8
Løfteøjer, Gunnebo	1-17
Løfteøjer, åbne, Gunnebo	1-19
Løfteøjer, lukkede, Gunnebo, type SKG	1-19
Rundslingskoblinger, Gunnebo	1-19
Ovalringe, YellowLine, type C, klasse 10	1-23
Ovalringe, YellowLine	1-25
Ovalringe for 1 streng, RUD, type ICE-IAK-RG, klasse 12	1-29
Ovalringe for 2 strenge, RUD, type ICE-IAK-RG, klasse 12	1-30
Ovalringe for 4 strenge, RUD, type ICE-IAK-RG, klasse 12	1-30
Ovalringe, rustfrie, cromox® CAG, klasse 6	1-46

Links

Master links, GrabiQ type MFH grade 10	1-6
Master links, GrabiQ type MT	1-7
Master links, GrabiQ, oversized	1-7
Master links, GrabiQ type MF	1-7
Master links, GrabiQ type M	1-8
Master links, Gunnebo	1-17
Master links, open, Gunnebo	1-19
Master links, closed, Gunnebo, type SKG	1-19
Round sling links, Gunnebo	1-19
Master links, YellowLine, type C, grade 10	1-23
Master links, YellowLine	1-25
Master links for 1 leg, RUD, type ICE-IAK-RG, grade 12	1-29
Master links for 2 legs, RUD, type ICE-IAK-RG, grade 12	1-30
Master links for 4 legs, RUD, type ICE-IAK-RG, grade 12	1-30
Master links, stainless, cromox® CAG, grade 6	1-46

Samleled

Samleled, GrabiQ	1-15
G-samleled, Gunnebo	1-15
Berglok, Gunnebo	1-17
Samleled, halvt, Gunnebo	1-20
Samleled, YellowLine, type CCL, klasse 10	1-23
Samleled, YellowLine	1-25
Clevis samleled, RUD, type ICE-IRG	1-31
Samleled, RUD, type ICE-IVS klasse 12	1-31
Samleled, rustfrie, cromox® CVG, klasse 6	1-48

Links

Coupling links, GrabiQ	1-15
G-links, Gunnebo	1-15
Chain couplers, Gunnebo	1-17
Half links, Gunnebo	1-20
Connecting links, YellowLine, type CCL, grade 10	1-23
Connecting links, YellowLine	1-25
Clevis connector, RUD	1-31
Coupling links, RUD	1-31
Coupling links, stainless, cromox® CVG, grade 6	1-48

Sjækler

Clevis sjækler, Gunnebo	1-17
Stålsjækler, Gunnebo	1-22
Sjækler, standard, Green Pin®	1-34
Sjækler, heavy duty, Green Pin®	1-36
Sjækler, GN (wide body) til beskyttelse af rundslings	1-37
Stålsjækler, Crosby	1-38
Sjækler, YellowLine	1-39
Svirlvsjækler, Crosby	1-40
Sjækler, handelssjækler	1-42
Sjækler, rustfrie	1-43
Brandmandshager, rustfrie	1-43
Brandmandshager, galvaniseret Ikke godkendt til løfteopgaver	1-44
D-sjækler, rustfrie, cromox® CSA, klasse 6	1-48
Sikkerheds D-sjækler, rustfrie, cromox® CSS	1-49

Shackles

Clevis shackles, Gunnebo	1-17
Shackles, Gunnebo	1-22
Shackles, standard, Green Pin®	1-34
Shackles, heavy duty, Green Pin®	1-36
Shackles, GN forged rope	1-37
Shackles, Crosby	1-38
Shackles	1-39
Swivel shackles, Crosby	1-40
Shackles, commercial shackles	1-42
Shackles, stainless	1-43
Snap hooks, stainless	1-43
Snap hooks, galvanized Not approved for lifting	1-44
D-shackles, stainless, cromox® CSA, grade 6	1-48
Safety D-shackles, stainless, cromox® CSS	1-49

**Belastningstabel
kædesæt, klasse 10****Load table chain slings,
grade 10**

	1-strengt / 1-legged		2-strengt / 2-legged		3+4-strengt / 3+4-legged		Endeløs / Endless	
Anhængnings- måde / Sling type								
Lastfaktor / Load Factor	1,0	0,8	1,4	1,0	2,1	1,5	2,0	1,6
Kæde dim. / Chain dim. mm	WLL i tons / in tonnes							
6	1.50	1.20	2.12	1.50	3.15	2.24	3.00	2.40
8	2.50	2.00	3.50	2.50	5.20	3.70	5.00	4.00
10	4.00	3.20	5.60	4.00	8.40	6.00	8.00	6.40
13	6.70	5.20	9.50	6.70	14.00	10.00	13.40	10.70
16	10.00	8.00	14.00	10.00	21.00	15.00	20.00	16.00
20	16.00	12.80	22.40	16.00	33.60	24.00	32.00	25.60
22	20.00	16.00	28.00	20.00	42.00	30.00	40.00	32.00
26	27.00	21.60	38.20	27.00	57.30	40.50	54.00	43.20
32	40.00	32.00	56.40	40.00	84.00	60.00	80.00	64.00

Sikkerhedsfaktor 4:1.
Safety factor 4:1.

Gælder for normal anven-
delse af ligebelastede parter.
Refer to normal use and
equally loaded sling legs.

Ulige belastninger

For ulige løft / asymmetriske løft foreskriver Gunnebo følgende:

- 2-strengt slings beregnes som tilsvarende 1-strengt.
 - 3- og 4-strengt slings beregnes som tilsvarende 1-strengt, men hvis de 2 af strengene bærer hovedparten af byrden ligeligt, må det samlede sling beregnes som 2-strengt sling.
 - Alternativt må hele kædeslinget beregnes til 50% af mærket WLL.
- For yderligere spørgsmål kontakt Fyns Kran Udstyr A/S.

Aggressive kemikalier

Kæder og komponenter fremstillet i klasse 10 må ikke anvendes i forbindelse med syre eller andre aggressive kemikalier. I meget korrosionsaggressive miljøer skal der udvises stor forsigtighed. I tvivlstilfælde kontakt Fyns Kran Udstyr A/S.

OBS! Varmforzinking er ikke tilladt uden kontrol fra kædeleverandøren.

Ekstreme temperaturer

Kapaciteten på kædeslyng fremstillet af klasse 10 reduceres under høje temperaturpåvirkninger, som følger:

Temp. på kæden Reduktion i WLL
-40°C til 200°C Ingen

Når kædeslyng har sin normale temperatur igen, har det også sin fulde kapacitet. Kædeslyng fremstillet i klasse 10 bør ikke anvendes over eller under ovenstående temperaturer.

Asymmetric Loading Conditions

In case of unequally loaded chain slings Gunnebo recommend following:

- 2-legged slings calculated as the corresponding 1-legged sling.
- 3- and 4-legged slings as the corresponding 1-legged sling, however, if it is certain that 2 legs are equally carrying the major part of the load, it can be calculated as the corresponding 2-legged sling.
- Or the chain sling should be rated as 50% of the marked WLL.

For further information please don't hesitate to contact us.

Aggressive Environments

Chain and components of Grade 10 must not be exposed to acids and other aggressive chemicals. In very aggressive environments, the utmost caution should be exercised. In case of doubt contact Fyns Kran Udstyr A/S.


Note! Hot-dip galvanizing or plating is not allowed without the manufacturer's control.

Extreme Temperature Conditions

The capacity of lifting slings of Grade 10 is derated by temperature according to the following table:

Temp. of sling Reduction in WLL
-40°C to 200°C None

Upon return to normal temperature the sling reverts to its full capacity. Grade 10 chain slings should not be used outside these temperature limits.



Kæder, GrabiQ, klasse 10

Alle kæder og hver enkel komponent prøvebelastes til et niveau, der svarer til 62% af min. brudstyrken. Særskilt kontrol før levering sikrer en høj og ensartet kvalitet.

Der tages stikprøver fra hver produktionsserie af kæder og komponenter, som testes til brud.

Min. brudstyrke = max. WLL x sikkerhedsfaktor.

Alle testdata dokumenteres.

Den foreskrevne forlængelse for klasse 10 kæde er min. 20%. Desuden testes de færdige produkter for at sikre korrekt hårdhed. Der foretages cykliske lasttests for at simulere den udmattelseeffekt, som kan forventes over mange års anvendelse. Kæder og komponenter er identifikationsmærket, hvilket gør det muligt at søge helt tilbage til stålleverandøren for analyse af råmaterialet.

Chains, GrabiQ, grade 10

All chain and every single component is proof-loaded to a level that corresponds to 62% of the minimum breaking force. Individual inspection before delivery ensures a high and even quality. Chain and components are tested to destruction on a random sample basis from every production batch.

Min. breaking force = max. working load limit x safety factor. Full test data is documented. The prescribed elongation for grade 10 chain is minimum 20%.

Additionally, finished products are subjected to testing to ensure the correct hardness levels. Cyclical loading tests are carried out to simulate the fatigue effects that would be expected over many years of use. Chain and components carry identification marks for full traceability right back to the steel supplier for raw material analysis.


Varenr. / Item no.	Dim. mm	WLL tons / tonnes	Trækprøve / Pulling test kN	MBL min. kN	d mm	P mm	w1 mm	Vægt / Weight kg/m
110-050-0006	6	1,5	35	56	6	18	8,5	1,0
110-050-0008	8	2,5	62	100	8	24	11,0	1,7
110-050-0010	10	4,0	100	160	10	30	14,0	2,7
110-050-0013	13	6,7	162	260	13	39	17,7	4,4
110-050-0016	16	10,0	250	400	16	48	21,9	6,7
110-050-0020	20	16,0	397	640	20	60	27,0	9,1
110-050-0022	22	20,0	475	806	22	66	29,0	11,8
110-050-0026	26	27,0	664	1062	26	78	35,0	16,4
110-050-0032	32	40,0	981	1610	32	96	41,6	25,8

Kæder, klasse 8

EN 818-2.

Chains, grade 8

EN 818-2.



Sikkerhedsfaktor 4:1.
Safety factor 4:1.

Varenr. / Item no.	Dim. mm	WLL tons/tonnes	Trækprøve / Pulling test kN	MBL min. kN	D mm	E mm	H mm	Vægt / Weight kg/m
110-100-0026	26	21,20	510	850	26	78	87,0	14,3
110-100-0032	32	31,50	800	1288	32	96	107,0	23,0



GUNNEBO
Industries



FYNS KRAN UDSTYR A/S

www.fku.dk

KÆDER & TILBEHØR / CHAINS & FITTINGS

1-3

Gunnebo kædesæt

På eget værksted produceres kædesæt tilpasset enhver kundes ønske og behov.

Gunnebo chain slings

Our own workshop can produce chain slings to suit every customers need and wishes.

1



Mulige opkorterkrøge.
Grab hooks available.



Mulige bundkrøge.
Hooks available.



Med integreret opkorterkrøge.
With integrated grab hook.

ODENSE | KØBENHAVN | ESBJERG | AALBORG

+45 7015 2015 | fku@fku.dk



FYNS KRAN UDSTYR A/S
www.fku.dk

1-4

KÆDER & TILBEHØR / CHAINS & FITTINGS

1

Gunnebo kædesæt

På eget værksted produceres kædesæt tilpasset enhver kundes ønske og behov.

Gunnebo chain slings

Our own workshop can produce chain slings to suit every customers need and wishes.



Med integrerede opkorkroge.
With integrated grab hooks.

Med integrerede opkorkroge.
With integrated grab hooks.



Mulige opkorkroge.
Grab hooks available.



OG

GG

Mulige bundkroge.
Hooks available.



BK

OBK

BKG

GBK

EKN

EGKN

BKL

BKLL

GG

CL



ODENSE | KØBENHAVN | ESBJERG | AALBORG

+45 7015 2015 | fku@fku.dk



GrabiQ FlexiLeg

GrabiQ FlexiLeg giver følgende fordele:

- Større fleksibilitet og mindre tidsforbrug.
- Reduceret løftegrejsmængde.
- Forbedret sikkerhed.
- Omkostningsbesparende.

GrabiQ FlexiLeg


GrabiQ FlexiLeg will give you the following benefits:

- Increased flexibility and time saving.
- Less equipment needed.
- Improved safety.
- Cost savings.

Klassisk



FlexiLeg - Kun 5 grene

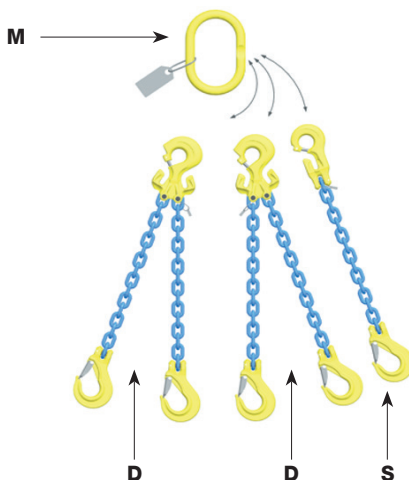

M

Ovalring / Master Link

D

2-grenet kædesæt med indbygget opkorterfunktion.
Double chain sling unit with built in shortening function.


S

1-grenet kædesæt med indbygget opkorterfunktion.
Single chain sling unit with built in shortening function.

FlexiLeg belastningsskilt
viser WLL for alle kombinationer.
*FlexiLeg ID Tag giving WLL f
or all combinations.*

Sammensætning af kædesæt / Sling configuration:

1-grenet / 1-leg:	M + S
2-grenet / 2-legs:	M + D
3-grenet / 3-legs:	M + D + S
4-grenet / 4-legs:	M + D + D



GUNNEBO
Industries



FYNS KRAN UDSTYR A/S
www.fku.dk

1-6

KÆDER & TILBEHØR / CHAINS & FITTINGS

1

Kædesæt, GrabiQ

Eksempler på GrabiQ kædesæt,
(samlet på eget værksted).
Alle kædesæt leveres med belastningsskilt.

Chain slings, GrabiQ

Examples of GrabiQ chain slings,
(assembled at our own workshop). All chain slings are
delivered with load labels.



MG1 - BKG




MGD2 - BKG



TG1 - EGKN



TL1 - EGKN



Firkantringe, GrabiQ type MFH klasse 10

For DIN15401 krankroge.
Sikkerhedsfaktor 5:1.

Master links, GrabiQ type MFH grade 10

DIN15401 Crane hook.
Safety factor 5:1.



Optimal anlægsflade mod brede
krankroge. MFH bagerst.
For wide crane hooks. MFH rear.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm			L mm	E mm	D mm	Vægt / Weight kg
			1-strengt/ 1-legged	2-strengt/ 2-legged	3+4-strengt 3+4 legged				
120-300-7500	MFH-1310-10	7,5	13	10	8	230	125	22	1,9
120-301-0000	MFH-1613-10	10,0	16	13	10	250	135	28	3,3
120-301-7000	MFH-2016-10	17,0	20	16	13	280	135	32	4,6
120-302-8000	MFH-2220-10	28,0	22	20	16	320	175	40	8,6
120-352-5000	MFHW-2220-10	25,0	22	20	16	355	225	40	9,9


ODENSE | KØBENHAVN | ESBJERG | AALBORG

+45 7015 2015 | fku@fku.dk



Garnitureringe, GrabiQ type MT klasse 10

Master links, GrabiQ type MT grade 10




Sikkerhedsfaktor 5:1.
Safety factor 5:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L1 mm	L mm	E mm	D mm	I mm	b mm	d mm	Vægt / Weight kg
120-200-3500	MT 6-10	3,5	270	150	90	19	120	70	14	1,8
120-200-5200	MT 8-10	5,2	300	160	95	22	140	80	17	3,0
120-201-1500	MT 10-10	11,5	360	200	120	30	160	95	22	6,4
120-201-7000	MT 13-10	17,0	450	250	150	40	200	120	30	14,2
120-202-8000	MT 16-10	28,0	500	300	200	50	200	120	32	23,0
120-203-5000	MT 20-10	35,0	550	300	200	55	250	150	40	31,5
120-205-3000	MT 22-10	53,0	610	350	200	60	260	140	45	46,0
120-207-0000	MT-26-10	70,0	730	450	250	70	280	160	50	71,0
120-209-1000	MT-32-10	90	750	450	260	80	280	160	55	91,0

Ovalringe, GrabiQ, overstørrelse, type MFX, klasse 10

Master links, GrabiQ, oversized, type MFX, grade 10



Sikkerhedsfaktor 5:1.
Safety factor 5:1.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim.		L mm	E mm	D mm	Vægt / Weight kg
			1 strenget/ 1-legged mm	2 strenget/ 2-legged mm				
120-150-4000	MFX 10/8-10	4,25	8 / 10	8	340	180	25	3,7
120-150-6700	MFX 13/10-10	7,5	13	10	340	180	28	4,7
120-151-0000	MFX 16/13-10	11,2	16	13	340	180	34	7,1
120-151-4400	MFX 20/16-10	16,0	20	16	340	180	40	9,6


Designet til brug med CL, CLD, CG og CGD. Designed for use with CL, CLD, CG and CGD.

Ovalringe, GrabiQ type MF klasse 10


For 1-, 2-, 3- og 4-strengt kædesæt med
C-krog eller samleled.
Sikkerhedsfaktor 5:1.

Master links, GrabiQ type MF grade 10

For 1-, 2-, 3- and 4-legged slings
with C-Grab or C-Lok.
Safety factor 5:1.



Varenr. / Item no.	Type	WLL tons/tonnes	1-strengt / 1-legged mm	2-strengt / 2-legged mm	3+4-strengt / 3+4-legged mm	L mm	E mm	D mm	Vægt / Weight kg
120-100-1500	MF 6-10	1,5	6	-	-	100	60	14	0,2
120-100-2500	MF 8/6-10	2,5	8	-	-	125	70	14	0,4
120-100-4000	MF 10/8-10	4,0	10	8	-	140	80	17	0,8
120-100-7500	MF 13/10-10	7,5	13	10	8	160	95	22	1,5
120-101-0000	MF 16/13-10	10,0	16	13	10	190	110	25	2,8
120-101-7000	MF 20/16-10	17,0	20	16	13	240	140	34	5,2
120-102-5000	MF 22/20-10	25,0	20	20	16	250	150	40	7,3




Ovalringe, GrabiQ type M klasse 10

Samles i kæde med G-samleled.
Sikkerhedsfaktor 5:1. EN1677-4.

Master links, GrabiQ type M grade 10

Connection to chain with G-Link.
Safety factor 5:1. EN1677-4.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm		L mm	B mm	D mm	Vægt / Weight kg
			1-strengt/1-legged	2-strengt/2-legged				
120-064-3000	M 32/26-10	43,00	28 / 32	26	300	200	50	15,0
120-065-6000	M 36/32-10	56,00	-	32	350	200	55	21,0
120-067-0000	M 45/36-10	70,00	-	-	375	210	60	26,0
120-069-0000	M 90 T-10	90,00	-	-	450	250	70	43,0
120-069-9125	M 125 T-10	125,00	-	-	450	260	80	57,0




Topkroge, GrabiQ, enkelt type MG klasse 10

For 1-strengt kædesæt.
Indbygget opkorterkrug.
Sikkerhedsfaktor 4:1.

Mastergrabs, GrabiQ type MG grade 10

All in one compact top link.
Also reevable.
Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	A mm	E mm	D mm	Vægt / Weight kg
120-400-1500	MG 6-10	1,5	145	88	60	15	0,5
120-400-2500	MG 8-10	2,5	171	92	60	18	0,9
120-400-4000	MG 10-10	4,0	211	113	75	22	1,8
120-400-6700	MG 13-10	6,7	261	138	90	26	3,5
120-401-0000	MG 16-10	10,0	311	157	105	30	6,1




Topkroge, GrabiQ, enkelt type CG klasse 10

Til brug sammen med MF Master Link.
Sikkerhedsfaktor 4:1.

C-grabs, GrabiQ type CG grade 10

For use with MF Master Link and Choke.
Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	E mm	D mm	Vægt / Weight kg
130-200-1500	CG 6-10	1,5	80	11	24	19	0,3
130-200-2500	CG 8-10	2,5	107	12	32	24	0,7
130-200-4000	CG 10-10	4,0	134	15	40	29	1,5
130-200-6500	CG 13-10	6,7	172	18	52	38	3,2
130-201-0000	CG 16-10	10,0	215	22	64	47	6,1




Topkroge, GrabiQ, duo type MGD klasse 10

For 2-strengt kædesæt.
Sikkerhedsfaktor 4:1.

Mastergrabs, GrabiQ, duo type MGD grade 10

All in one compact top Link for 2-legged
Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	A mm	E mm	D mm	Vægt / Weight kg
120-450-2100	MGD 6-10	2,1	144	90	60	17	0,7
120-450-3500	MGD 8-10	3,5	171	100	75	21	1,3
120-450-5600	MGD 10-10	5,6	211	124	90	24	2,3
120-450-9100	MGD 13-10	9,4	263	148	105	29	5,2
120-451-4000	MGD 16-10	14,0	311	175	120	35	7,9



Topkroge, GrabiQ, duo type CGD klasse 10

Til brug sammen med MF-Master Link.
Sikkerhedsfaktor 4:1.

C-grabs, GrabiQ, duo type CGD grade 10

For use with MF-Master Link.
Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	E mm	D mm	Vægt / Weight kg
130-250-2100	CGD 6-10	2	79	11	24	20	0,6
130-250-3500	CGD 8-10	3,5	107	12	32	29	1,1
130-250-5600	CGD 10-10	5,6	134	15	40	37	2,2
130-250-9100	CGD 13-10	9,5	173	19	48	48	5,4
130-251-4000	CGD 16-10	14	215	22	64	57	9,1




Topkroge, GrabiQ, enkelt type CL klasse 10

Til brug sammen med MF-Master Link.
Sikkerhedsfaktor 4:1.

C-loks, GrabiQ type CL grade 10

For use with MF-Master Link and Choke.
Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	E mm	D mm	Vægt / Weight kg
130-100-1500	CL 6-10	1,5	43	11	24	18	0,2
130-100-2500	CL 8-10	2,5	58	12	32	24	0,5
130-100-4000	CL 10-10	4,0	74	15	40	29	1,0
130-100-6500	CL 13-10	6,7	94	18	52	38	2,0
130-101-0000	CL 16-10	10,0	119	22	64	48	3,8




**Topkroge, GrabiQ, duo
type CLD
klasse 10**

Til brug sammen med MF-Master Link.
Sikkerhedsfaktor 4:1.

**C-loks, GrabiQ, duo
type CLD
grade 10**

For use with MF Master Link.
Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	E mm	D mm	Vægt / Weight kg
130-150-2100	CLD 6-10	2,1	43	11	24	22	0,4
130-150-3500	CLD 8-10	3,5	58	12	32	29	0,6
130-150-5600	CLD 10-10	5,6	74	15	40	37	1,2
130-150-9100	CLD 13-10	9,5	94	18	52	46	3,1
130-151-4000	CLD 16-10	14,0	119	25	64	57	5,5



**Sikkerhedskroge, GrabiQ
type GBK
klasse 10**

Sikkerhedsfaktor 4:1.

**Self locking hooks, GrabiQ
type GBK
grade 10**

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	G mm	H mm	Vægt / Weight kg
140-150-1500	GBK 6-10	1,5	87	26	15	17	0,4
140-150-2500	GBK 8-10	2,5	119	36	20	22	0,8
140-150-4000	GBK 10-10	4,0	150	47	22	29	1,4
140-150-6700	GBK 13-10	6,7	172	53	29	38	2,7
140-151-0000	GBK 16-10	10,0	208	68	30	45	4,4



**Sikkerhedskroge, GrabiQ
type BKG
klasse 10**

Sikkerhedsfaktor 4:1.

**Self locking hooks, GrabiQ
type BKG
grade 10**

Safety factor 4:1.


Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	G mm	H mm	Vægt / Weight kg
140-100-1500	BKG 6-10	1,5	91	29	15	21	0,5
140-100-2500	BKG 8-10	2,5	121	37	17	26	0,9
140-100-4000	BKG 10-10	4,0	144	45	21	31	1,5
140-100-6700	BKG 13-10	6,7	180	55	30	40	3,0
140-101-0000	BKG 16-10	10,0	219	62	37	50	5,5
140-101-0000	BKG 20-10	16,0	240	68	44	62	9,6



KÆDER & TILBEHØR / CHAINS & FITTINGS

1-11

1

**Svirvel sikkerhedskroge,
GrabiQ
type BKL
klasse 10**

Sikkerhedsfaktor 4:1.

**Swivel safety hooks,
GrabiQ
type BKL
grade 10**

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	B mm	C mm	E mm	A mm	G mm	H mm	Vægt / Weight kg
140-250-1500	BKL 6-10	1,5	6	149	29	23	33	11	15	21	0,7
140-250-2500	BKL 7/8-10	2,5	8	183	37	27	38	12	17	26	1,2
140-250-4000	BKL 10-10	4,0	10	218	45	37	44	15	21	31	2,0
140-250-6700	BKL 13-10	6,7	13	282	55	49	48	19	30	40	4,0
140-251-0000	BKL 16-10	10,0	16	341	62	65	61	25	37	50	7,2
140-251-6000	BKL 18/20-10	16,0	20	368	68	70	72	31	44	62	11,4


**Svirvel sikkerhedskroge,
GrabiQ
type BKLK - med kugleleje
klasse 10**

Sikkerhedsfaktor 4:1.

**Swivel safety hooks,
GrabiQ
type BKLK
grade 10**

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	B mm	C mm	E mm	A mm	G mm	H mm	Vægt / Weight kg
140-300-2500	BKLG 7/8-10	2,5	8	183	37	27	38	12	17	26	1,2
140-300-4000	BKLG 10-10	4,0	10	218	45	35	44	15	21	31	2,0
140-300-6700	BKLG 13-10	6,7	13	280	55	45	48	19	30	40	4,0
140-301-0000	BKLG 16-10	10,0	16	339	62	62	61	25	37	50	7,4
140-301-6000	BKLG 18/20-10	16,0	20	368	68	60	72	31	44	62	11,5
140-302-0000	BKLG 22-10 OS	20,0	22	436	79	80	80	35	50	62	16,8
140-302-7000	BKLG 26-10 OS	27,0	26	486	100	110	102	45	54	68	26,0


**Sikkerhedskroge, GrabiQ
type BK
klasse 10**

Sikkerhedsfaktor 4:1.

**Safety hooks, GrabiQ
type BK
grade 10**

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	A mm	L mm	B mm	E mm	F mm	G mm	H mm	Vægt / Weight kg
140-050-1500	BK 6-10	1,5	6	12	109	29	22	10	15	21	0,5
140-050-2500	BK 7/8-10	2,5	8	14	138	37	28	11	17	26	0,9
140-050-4000	BK 10-10	4,0	10	16	168	45	34	13	21	31	1,5
140-050-6700	BK 13-10	6,7	13	20	207	55	44	16	30	40	3,0
140-051-0000	BK 16-10	10,0	16	26	254	62	56	20	37	50	5,5
140-051-6000	BK 18/20-10	16,0	20	30	289	68	60	22	44	62	9,0
140-052-0000	BK22-10	20	22	32	320	80	70	24	50	62	11,3
140-052-7000	BK26-10	27	26	35	342	100	80	25	54	68	16,5



**Sikkerhedskroge, GrabiQ
type OBK
klasse 10**

Sikkerhedsfaktor 4:1.

**Sling hooks, GrabiQ
type OBK
grade 10**

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	A mm	L mm	B mm	E mm	F mm	G mm	H mm	Vægt / Weight kg
140-200-1500	OBK 6-10	1,5	12	103	26	22	9	15	17	0,4
140-200-2500	OBK 7/8-10	2,5	14	139	37	28	10	20	22	0,8
140-200-4000	OBK 10-10	4,0	16	170	47	34	13	22	29	1,3
140-200-6700	OBK 13-10	6,7	21	206	53	44	15	29	38	2,6
140-201-0000	OBK 16-10	10,0	26	251	68	56	19	29	45	4,4
140-201-2500	OBK 18/20-10	16,0	28	293	74	60	22	44	56	7,3




**Lastkroge, GrabiQ
type EGKN
klasse 10**

Sikkerhedsfaktor 4:1.

**Sling hooks, GrabiQ
type EGKN
grade 10**

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	G mm	H mm	Vægt / Weight kg
140-550-1500	EGKN 6-10	1,5	86	24,5	17	20	0,4
140-550-2500	EGKN 8-10	2,5	95	28	17	23	0,5
140-550-4000	EGKN 10-10	4,0	121	35	23	31	1,1
140-550-6700	EGKN 13-10	6,7	145	42	28	38	2,2
140-551-0000	EGKN 16-10	10,0	170	52	36	46	4,0
140-551-6000	EGKN 20-10	16,0	209	61	42	60	7,6




**Lastkroge med pal, GrabiQ
type EKN
klasse 10**

Sikkerhedsfaktor 4:1.

**Sling hooks with latch, GrabiQ
type EKN
grade 10**

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	E mm	F mm	G mm	H mm	Vægt / Weight kg
140-500-1500	EKN-6-10	1,5	94	24	22	10	17	20	0,4
140-500-2500	EKN-8-10	2,5	108	28	28	12	17	23	0,5
140-500-4000	EKN-10-10	4	134	37	34	14	23	30	1,0
140-500-6700	EKN-13-10	6,7	166	42	44	18	28	38	2,1
140-501-0000	EKN-16-10	10	203	50	56	22	36	47	3,9
140-501-6000	EKN-20-10	16	229	60	61	26	42	60	6,3
140-502-0000	EKN-22-10	20	267	73	64	31	43	67	8,7
140-502-6000	EKN-26-10	27	301	82	66	32	51	75	13,2
140-504-0000	EKN-32-10	40	353	96	90	38	61	98	25



Rundslingskroge, GrabiQ type RH klasse 10


Denne krog er tilpasset løft med rundsling eller løftebånd. Konstruktionen gør, at løftestroppeerne ikke kan løsne sig af sig selv og beskytter samtidig krogen imod slitage ved slæbning og slag. Sikkerhedsfaktor 4:1.



Roundsling hooks, GrabiQ type RH grade 10

The hook is easy and safe to use and suitable for both roundslings and webbing slings with eyes. Smooth and contoured profile to prevent snagging. Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	B mm	D mm	H mm	L mm	M mm	Vægt / Weight kg
140-750-1000	RH 1-10	1	24	35	73	116	8,0	0,5
140-750-2000	RH 2-10	2	28	40	86	137	10,0	0,7
140-750-3000	RH 3-10	3	33	47	108	168	12,0	1,3
140-750-5000	RH 5-10	5	43	73	131	155	16,5	3,2




Støberikroge, GrabiQ type OKE klasse 10

Sikkerhedsfaktor 4:1.

Foundry hooks, GrabiQ type OKE grade 10

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	E mm	F mm	G mm	H mm	Vægt / Weight kg
140-600-2500	OKE 8-10	2,5	124	63	28	12	20	26	0,8
140-600-4000	OKE 10-10	4,0	151	76	34	15	26	30	1,4
140-600-6700	OKE 13-10	6,7	184	90	44	19	33	39	2,8
140-601-0000	OKE 16-10	10,0	218	102	56	23	40	46	4,9
140-601-6000	OKE 20-10	16	247	114	60	27	46	60	7,2
140-602-0000	OKE 22-10	20	275	120	64	31	60	70	11,3
140-602-7000	OKE 26-10	27	300	113	70	35	64	77	16



Opkorterkrøge med gaffel, GrabiQ type GG klasse 10

Sikkerhedsfaktor 4:1.


Grab hooks with fork, GrabiQ type GG grade 10

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	Vægt / Weight kg
140-650-2500	GG 8-10	2,5	57	10,5	0,4
140-650-4000	GG 10-10	4,0	76	12	0,9
140-650-6700	GG 13-10	6,7	97	16	1,8
140-651-0000	GG 16-10	10,0	124	20	3,1
140-651-6000	GG 20-10	16,0	147	26	7,0

**FYNS KRAN UDSTYR A/S****www.fku.dk**

1-14

KÆDER & TILBEHØR / CHAINS & FITTINGS**1****Opkorterkrøge, GrabiQ
type OG
klasse 10**

Sikkerhedsfaktor 4:1.

**Grab hooks, GrabiQ
type OG
grade 10**


Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	E mm	F mm	Vægt / Weight kg
140-670-0250	OG-7/8-10	2,5	65	10,5	17	12	0,3
140-670-0400	OG-10-10	4,0	85	12	20	16	0,7
140-670-0670	OG-13-10	6,7	104	16,2	26	22	1,6
140-670-1000	OG-16-10	10,0	131	20	32	24	2,8
140-670-1600	OG-20-10	16,0	167	26,4	41	28	6,1
140-672-0000	OG-22-10	20,0	187	26	46	32	8,6
140-672-7000	OG-26-10	27,3	228	32	55	38	14,0
140-674-0000	OG-32-10	40,0	229	40	50	27	20,7

**GUNNEBO**
Industries

ODENSE | KØBENHAVN | ESBJERG | AALBORG

+45 7015 2015 | fku@fku.dk



**Samleled, GrabiQ,
type G klasse 10**

Sikkerhedsfaktor 4:1.

**Coupling links, GrabiQ
type G, grade 10**

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	F mm	A mm	C mm	Vægt / Weight kg
130-050-1500	G 6-10	1,5	45	15	7	8	16	0,1
130-050-2500	G 8-10	2,5	56	18	9	11	22	0,2
130-050-4000	G 10-10	4,0	68	25	12	13	26	0,3
130-050-6700	G 13-10	6,7	89	29	15	17	33	0,7
130-051-0000	G 16-10	10,0	106	36	19	20	40	1,4
130-051-6000	G 20-10	16,0	125	43	23	26	44	2,2
130-052-0000	G 22-10	20,0	152	50	26	28	59	3,5
130-052-7000	G 26-10	27,0	161	58	32	34	61	5,7
130-054-0000	G 32-10	40,0	200	70	38	40	77	9,5



**G-samleled, Gunnebo
type G**

 Sikkerhedsfaktor 4:1.
EN1677-1.

**G-links, Gunnebo
type G**

 Safety factor 4:1.
EN1677-4.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	B mm	F mm	A mm	C mm	Vægt / Weight kg
130-401-5500	G 22-8	15,5	22	152	50	23	26	59	3,0
130-402-1600	G 26-8	21,6	26	161	58	26	28	61	5,2
130-403-2000	G 32-8	32,8	32	200	70	32	34	77	9,5

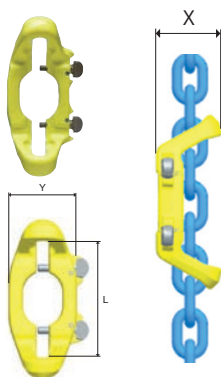

**Kædeopkortere, GrabiQ
type MIG CC
klasse 10**

Sikkerhedsfaktor 4:1. Komplet med split.

**Midgrab shorteners, GrabiQ
type MIG CC
grade 10**

Safety factor 4:1. With pin.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	X mm	Y mm	Vægt / Weight kg
140-800-2500	MIG CC 8-10	2,5	95	50	60	0,7
140-800-4000	MIG CC 10-10	4,0	125	70	77	1,1
140-800-6700	MIG CC13-10	6,7	150	90	80	2,6





Sikkerhedsfaktor 4:1.
Safety factor 4:1.
EN818-4.

Gælder for normal anvendelse af ligebelastede parter.
Refer to normal use and equally loaded sling legs.

Belastningstabel kædesæt, klasse 8

Load table chain slings, grade 8

	1-strengt / 1-legged		2-strengt / 2-legged		3+4-strengt / 3+4-legged		Endeløs / Endless	
Anhugnings-måde / Sling type								
Lastfaktor / Load Factor	1,0	0,8	1,4	1,0	2,1	1,5	2,0	1,6
Kæde dim. / Chain dim. mm	WLL i tons / in tonnes							
6	1.12	0.90	1.60	1.12	2.36	1.70	2.24	1.80
7	1.50	1.20	2.12	1.50	3.15	2.24	3.00	2.50
8	2.00	1.60	2.80	2.00	4.25	3.00	4.00	3.15
10	3.15	2.50	4.25	3.15	6.70	4.75	6.30	5.00
13	5.30	4.25	7.50	5.30	11.20	8.00	10.60	8.50
16	8.00	6.40	11.20	8.00	17.00	11.80	16.00	12.50
19	11.20	9.00	16.00	11.20	23.60	17.00	22.40	18.00
22	15.00	12.00	21.20	15.00	31.50	22.40	30.00	23.60
26	21.20	16.95	30.00	21.20	45.00	31.50	42.40	33.50
32	31.50	25.20	45.00	31.50	67.00	47.50	63.00	50.00

Ulige belastninger

For ulige løft / asymmetriske løft foreskrives følgende:

- 2-strengt slings beregnes som tilsvarende 1-strengt.
- 3- og 4-strengt slings beregnes som tilsvarende 1-strengt, men hvis de 2 af strengene bærer hovedparten af byrden ligeligt, må det samlede sling beregnes som 2-strengt sling.
- Alternativt må hele kædeslinget beregnes til 50% af mærket WLL.

For yderligere spørgsmål venligst kontakt Fyns Kran Udstyr A/S.

Aggressive kemikalier

Kæde og komponenter fremstillet i klasse 8 må ikke anvendes i forbindelse med syre eller andre aggressive kemikalier. I meget korrosionsaggressive miljøer skal der udvises stor forsigtighed. I tvivlstilfælde kontakt Fyns Kran Udstyr A/S.

OBS! Varmforzinkning er ikke tilladt uden kontrol fra kædeleverandøren.

Ekstreme temperaturer

Kapaciteten på kædeslyng fremstillet af klasse 8 reduceres under høje temperaturpåvirkninger, som følger:

Temp. på kæden	Reduktion i WLL
-40°C - 200°C	-
+200°C - 300°C	10%
+300°C - 400°C	25%

Når kædeslyng har sin normale temperatur igen, har det også sin fulde kapacitet. Kædeslyng fremstillet af klasse 8 bør ikke anvendes over eller under ovenstående temperaturer.

Asymmetric Loading Conditions

In case of unequally loaded chain slings recommend following:

- 2-legged slings calculated as the corresponding 1-legged sling.
- 3- and 4-legged slings as the corresponding 1-legged sling, however, if it is certain that 2 legs are equally carrying the major part of the load, it can be calculated as the corresponding 2-legged sling.
- Or the chain sling should be rated as 50% of the marked WLL.

For further information please don't hesitate to contact us.

Aggressive Environments

Chain and components of Grade 8 must not be exposed to acids and other aggressive chemicals. In very aggressive environments, the utmost caution should be exercised. In case of uncertainty contact Fyns Kran Udstyr A/S.

Note! Hot-dip galvanizing or plating is not allowed beyond the manufacturer's control.

Extreme Temperature Conditions

The capacity of lifting slings of Grade 8 is derated by temperature according to the following table:

Temp. of sling	Reduction in WLL
- 40°C - 200°C	None
+ 200°C - 300°C	10%
+ 300°C - 400°C	25%

Upon return to normal temperature the sling reverts to its full capacity. G8 chain slings should not be used outside these temperature limits.

**Løfteøjer, Gunnebo
type CEL
klasse 8**

Med gaffel.
Sikkerhedsfaktor 4:1.
EN1677-1.

**Master links, Gunnebo
type CEL
grade 8**

With fork.
Safety factor 4:1.
EN1677-1.




Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	A mm	B mm	G mm	H mm	L mm	Vægt / Weight kg
120-650-2000	CEL 7/8-8	2,0	7 / 8	80	40	14	15	110	0,4
120-650-3200	CEL 10-8	3,2	10	100	50	18	19	126	0,7
120-650-5400	CEL 13-8	5,4	13	130	65	23	25	162	1,5

**Berglok, Gunnebo
type BL
klasse 8**

Sikkerhedsfaktor 4:1.
EN1677-1.

**Chain couplers, Gunnebo
type BL
grade 8**

Safety factor 4:1.
EN1677-1.




Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	E mm	F mm	A mm	Vægt / Weight kg
130-500-1100	BL 6-8	1,12	6	27	20	9	14	0,1
130-500-2000	BL 7/8-8	2,0	7 / 8	35	25	11	18	0,2
130-500-3200	BL 10-8	3,2	10	45	32	14	22	0,4
130-500-5400	BL 13-8	5,4	13	56	40	17	28	0,8
130-500-8000	BL 16-8	8,0	16	68	50	22	35	1,4

**Clevis sjækler, Gunnebo
type GSA
klasse 8**


For montering direkte til kæde.
Sikkerhedsfaktor 4:1.
EN1677-1.

**Clevis shackles, Gunnebo
type GSA
grade 8**

For mounting directly to chain.
Safety factor 4:1.
EN1677-1.

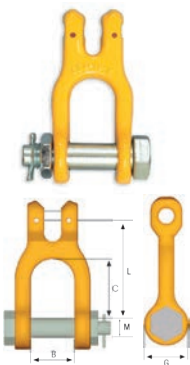

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	B mm	C mm	G mm	L mm	M mm	Vægt / Weight kg
130-650-2000	GSA 7/8-8	2,0	7 / 8	32	79	34	60	16	0,4
130-650-3200	GSA 10-8	3,15	10	34	93	40	80	20	0,8
130-650-5400	GSA 13-8	5,3	13	50	118	44	98	22	1,4
130-650-8000	GSA 16-8	8,0	16	60	141	54	114	27	2,4



FYNS KRAN UDSTYR A/S
www.fku.dk

1-18

KÆDER & TILBEHØR / CHAINS & FITTINGS

1




Lastkroge med pal, Gunnebo type ESKN*/SKN

For montering direkte i G-samleled.

Sikkerhedsfaktor 4:1.

EN1677-2.



Sling hooks with latch, Gunnebo type ESKN*/SKN

For mounting directly in G-Link.

Safety factor 4:1.

EN1677-2.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	B mm	G mm	H mm	Vægt / Weight kg
141-500-2000	SKN 7/8-8	2,0	7 / 8	90	27	18	21	0,4
141-500-3200	SKN 10-8	3,2	10	115	34	23	29	0,9
141-500-5400	ESKN* 13-8	5,4	13	145	42	28	36	1,8
141-500-8000	ESKN* 16-8	8,0	16	178	54	38	43	3,2
141-551-2500	ESKN* 18/20-8	12,5	19	197	59	49	51	5,1


Kuglelejesvirvler, isolerede, Gunnebo type SKLI / SKLU*

Til isolering af løftegrej, når der svejses på ophængt last. Maksimal beskyttelse imod vand og snavs.

Max. 1000 V.

Sikkerhedsfaktor 4:1.

EN1677-1.



Insulated ball bearing swivels, Gunnebo type SKLI / SKLU*

For insulation of lifting gear during welding on suspended loads.

Water and dust resistant.

Max. 1000 V.

Safety factor 4:1.

EN1677-1.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	D mm	Vægt / Weight kg
170-050-0008	SKLI 7-8-8	2,00	7 / 8	75	48	0,7
170-050-0010	SKLI 10-8	3,15	10	97	59	1,3
170-050-0013	SKLI 13-8	5,30	13	120	75	2,8
170-050-0016	SKLI 16-8	8,00	16	137	90	4,6
170-050-0020	SKLI 18/20-8	12,50	19	159	104	7,3
170-050-0022	SKLU* 22-8	15,50	22	160	109	9,2
170-050-0026	SKLU* 26-8	21,60	26	207	135	18,3


*Ikke isoleret.

*No insulation.



ODENSE | KØBENHAVN | ESBJERG | AALBORG

+45 7015 2015 | fku@fku.dk


**Løfteøjer, åbne,
Gunnebo
type SKO**

Monteres med halvt sameled.
Sikkerhedsfaktor 4:1.
EN1677-1.

**Master links, open,
Gunnebo
type SKO**

Connection to chain with half link.
Safety factor 4:1.
EN1677-1.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	E mm	G mm	K mm	Vægt / Weight kg
120-750-2000	SKO 7/8-8	2,0	7 / 8	99	50	14	15	0,3
120-750-3200	SKO 10-8	3,2	10	127	66	18	20	0,6
120-750-5400	SKO 13-8	5,4	13	145	72	22	25	1,0
120-750-8000	SKO 16-8	8,0	16	175	82	25	30	1,5
120-751-2500	SKO 18/20-8	12,5	19	204	105	30	36	2,9


**Løfteøjer, lukkede,
Gunnebo, type SKG**

Monteres med halvt sameled.
Sikkerhedsfaktor 4:1.
EN1677-1.

**Master links, closed,
Gunnebo, type SKG**

Connection to chain with half link.
Safety factor 4:1.
EN1677-1.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	E mm	G mm	Vægt / Weight kg
120-700-2000	SKG 7/8-8	2,0	7 / 8	99	50	14	0,3
120-700-3200	SKG 10-8	3,2	10	127	66	18	0,6
120-700-5400	SKG 13-8	5,4	13	145	72	22	1,1
120-700-8000	SKG 16-8	8,0	16	175	82	25	1,5
120-701-2500	SKG 18/20-8	12,5	19	204	105	30	3,0

**Rundslingskoblinger,
Gunnebo
type SKR**

Sikkerhedsfaktor 4:1.
EN1677-1.

**Round sling links,
Gunnebo
type SKR**

Safety factor 4:1.
EN1677-1.

Varenr. / Item no.	Type	WLL tons/tonnes	L mm	B mm	G mm	K mm	Vægt / Weight kg
120-800-2000	SKR 7/8-8	2,0	35	40	13	18	0,2
120-800-3200	SKR 10-8	3,2	42	47	16	24	0,4
120-800-5400	SKR 13-8	5,4	50	53	19	29	0,7
120-800-8000	SKR 16-8	8,0	62	67	23	35	1,3
120-801-2500	SKR 18/20-8	12,5	71	80	28	43	1,9
120-801-5500	SKR 22-8	15,5	111	125	40	50	5,3
120-802-1600	SKR 26-8	21,6	129	150	48	58	8,9

**Samleled, halvt, Gunnebo type SKT**

Leveres incl. pin og bøs.

Sikkerhedsfaktor 4:1.


EN1677-1.

Half links, Gunnebo type SKT

Incl. locking set.

Safety factor 4:1.

EN1677-1.



Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	B mm	F mm	A mm	E mm	Vægt / Weight kg
130-450-2000	SKT 7/8-8	2,0	7 / 8	28	18	9	11	22	0,1
130-450-3200	SKT 10-8	3,2	10	34	25	11	13	26	0,2
130-450-5400	SKT 13-8	5,4	13	44	30	15	16	33	0,4
130-450-8000	SKT 16-8	8,0	16	52	36	19	20	40	0,6
130-451-2500	SKT 18/20-8	12,5	19	63	43	22	23	48	1,1
130-451-5500	SKT 22-8	15,5	22	76	50	24	26	60	1,7
130-452-1600	SKT 26-8	21,6	26	80	58	30	33	61	2,6
130-453-2000	SKT 32-8	32,8	32	100	70	38	40	78	4,9

**Opkorterkrøge med øje, Gunnebo type OG**

Ingen lastreduktion takket være støtteskuldrene.

Må ikke bruges med Berglok.

Sikkerhedsfaktor 4:1.


EN1677-1.

Grab hooks, Gunnebo type OG

No reduction of working load limit, thanks to supporting legs on each side of hook to prevent chain link deformation.

Safety factor 4:1.

EN1677-1.



Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	B mm	E mm	F mm	Vægt / Weight kg
141-750-2000	OG 7/8-8	2,0	7 / 8	65	10	16	10	0,3
141-750-3200	OG 10-8	3,2	10	85	12	20	12	0,6
141-750-5400	OG 13-8	5,4	13	104	15	25	16	1,2
141-750-8000	OG 16-8	8,0	16	130	19	30	19	2,4

GRATIS APP – DOKUMENTATION OG DATA LIGE VED HÅNDEN

Scan QR-koden eller tast et ID-nummer, så viser den nye app fra FKU alle data på det valgte udstyr, som er eftersat af os, inkl. certifikater og eftersynsdatoer.

Vores EasyCert-app er gratis og kan downloades til både iOS og Android.

FREE APP - DOCUMENTATION AND DATA ON YOUR MOBILE DEVICE

Scan the QR code or enter an ID number, the new app from FKU then shows you all data on the selected equipment, if it is serviced by us, including certificates and inspection dates. Our EasyCert app is free and can be downloaded here for both iOS and Android.





Glidekroge, Gunnebo type LK


Anvendes sammen med Berglok.
WLL reduceres generelt til 80% anvendt i
kædesling. Sikkerhedsfaktor 4:1.

Choker hooks, Gunnebo type LK

Use with Berglok as end component.
WLL reduced to 80% in chain sling.
Safety factor 4:1.



Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	B mm	E mm	Vægt / Weight kg
142-000-2000	LK 7-8	2,0	7 / 8	96	19	32	0,3
142-000-3200	LK 10	3,2	10	120	21	42	0,8
142-000-5400	LK 13	5,4	13	150	26	52	1,8



Containerkroge, Gunnebo type CH-3


Sikkerhedsfaktor 4:1.

Container hooks, Gunnebo type CH-3

Safety factor 4:1.



Varenr. / Item no.	Type	WLL tons/tonnes	A mm	L mm	E mm	B mm	H mm	G mm	Vægt / Weight kg
170-200-0100	CH-3 45° højre / right	12,5	25	187	70	46	47	75	3,8
170-200-0200	CH-3 45° venstre / left	12,5	25	187	70	46	47	75	3,8
170-200-0300	CH-3 top / top	12,5	25	187	70	46	47	75	3,8





FYNS KRAN UDSTYR A/S
www.fku.dk

1-22


KÆDER & TILBEHØR / CHAINS & FITTINGS

1



Gravemaskinekroge, Gunnebo type UKN

For svejsmontage.
UKN-1 & UKN-2 har en let bøjet bundplade.
Sikkerhedsfaktor 4:1.



Weld-on-hooks, Gunnebo type UKN


For weld fitting. The bottom plates
of UKN-1 & UKN-2 are slightly bended.
Safety factor 4:1.

Varenr. / Item no.	WLL tons/tonnes	B mm	G mm	H mm	K mm	L mm	A mm	X mm	Vægt / Weight kg
142-100-1000	1	27	17	25	25	95	6	72	0,6
142-100-2000	2	33	20	30	30	114	8	86	1,0
142-100-3000	3	30	23	32	35	132	10	105	1,3
142-100-4000	4	30	29	38	42	140	11	114	2,0
142-100-5000	5	34	30	47	45	165	12	131	3,2
142-100-8000	8	34	40	51	50	172	13	133	3,6
142-101-0000	10	47	43	58	55	220	14	170	8,2
142-101-5000	15	55	50	67	60	240	15	188	9,8



Stålsjækler, Gunnebo type SA

Gulmalet.
Sikkerhedsfaktor 4:1.
EN1677-1.



Shackels, Gunnebo type SA

Yellow paint.
Safety factor 4:1.
EN1677-1.

Varenr. / Item no.	Type	WLL tons/tonnes	Kædedim. / Chain dim. mm	L mm	B mm	D mm	G mm	M mm	Vægt / Weight kg
150-050-2000	SA 7/8-8	2,0	7 / 8	30	15	8	20	10	0,1
150-050-3200	SA 10-8	3,2	10	52	24	13	35	16	0,4
150-050-5400	SA 13-8	5,4	13	65	28	16	42	20	0,7
150-050-8000	SA 16-8	8,0	16	72	30	18	46	22	1,0
150-051-1500	SA 19-8	11,5	19	86	36	22	55	27	1,8
150-051-5500	SA 22-8	15,5	22	94	40	25	62	30	2,5
150-052-1600	SA 26-8	21,6	26	116	48	32	75	39	5,2

ODENSE | KØBENHAVN | ESBJERG | AALBORG

+45 7015 2015 | fku@fku.dk


**Kæder, YellowLine,
klasse 10**

Sikkerhedsfaktor 4:1.

Varenr. / Item no.	WLL tons/tonnes	d mm	W ₁ mm	W ₂ mm	Vægt / Weight kg/m
111-000-0108	2,6	8	10,92	29,60	1,6
111-000-0110	4,0	10	13,00	37,00	2,5
111-000-0113	6,8	13	17,48	48,10	4,1

**Chains, YellowLine,
grade 10**


Safety factor 4:1.


**Ovalringe, YellowLine,
type C, klasse 10**

Sikkerhedsfaktor 4:1.

**Master links, YellowLine,
type C, grade 10**

Safety factor 4:1.




Varenr. / Item no.	WLL tons/tonnes	Til klasse 10-kæde/For Grade 10-Chain mm		A mm	B mm	D mm	Vægt / Weight kg
		1-strengt/ 1-legged	2-strengt/ 2-legged				
121-010-2500	2,5	8	6	120	70	14	0,4
121-010-4000	4	10	8	140	80	17	0,8
121-010-7500	7,5	13	10	160	95	22	1,5
121-011-0000	10	16	13	190	110	28	2,5


**Samleled, YellowLine,
type CCL, klasse 10**

Sikkerhedsfaktor 4:1.

**Connecting links, YellowLine,
type CCL, grade 10**

Safety factor 4:1.





Varenr. / Item no.	WLL tons/tonnes	Kædedim. / Chain dim. mm	A mm	H mm	K mm	L mm	Vægt / Weight kg
130-910-2500	2,5	8	18,5	10	61,5	84,5	0,22
130-910-4000	4	10	23	12,6	72	97,2	0,45
130-910-6700	6,7	13	27,5	16,8	89	127	1,15



Sikkerhedskroge, YellowLine, type CSK, klasse 10

Sikkerhedsfaktor 4:1.



Clevis self locking hooks, YellowLine, type CSK, grade 10

Safety factor 4:1.

Varenr. / Item no.	WLL tons/tonnes	Kædedim. / Chain dim. mm	A mm	B mm	E mm	H mm	R mm	M mm	L mm	Vægt / Weight kg
143-330-2500	2,5	8	9,5	36	35,5	26	123	90	166	0,81
143-330-4000	4	10	12	46	45	30	144	109	196,5	1,49
143-330-6700	6,7	13	15	59	53,5	40,5	182	138,5	251	2,99

Lastkroge med pal, YellowLine, type CLK klasse 10

Sikkerhedsfaktor 4:1.

Clevis sling hooks with latch, YellowLine, type CLK, grade 10

Safety factor 4:1.

Varenr. / Item no.	WLL tons/tonnes	Kædedim. / Chain dim. mm	A mm	B mm	E mm	H mm	M mm	L mm	Vægt / Weight kg
143-350-2500	2,5	8	9,5	37	25	27,5	88	134	0,58
143-350-4000	4,0	10	12	48	28	33,5	105,5	161,5	0,70
143-350-6700	6,7	13	15	59	38	42	134	203	1,40

Opkorterkrug, YellowLine, type COK, klasse 10


Sikkerhedsfaktor 4:1.

Eye grab hooks, YellowLine, type COK, grade 10


Safety factor 4:1.

Varenr. / Item no.	WLL tons/tonnes	Kædedim. / Chain dim. mm	E mm	B mm	D mm	M mm	L mm	Vægt / Weight kg
143-340-2500	2,5	8	10,8	18	37	53	91,5	0,28
143-340-4000	4	10	13,5	22,5	48,5	72	127,5	0,72
143-340-6700	6,7	13	16,5	28	59	96	163	1,6


yellowline

**Kæder, YellowLine klasse 8,**
EN818-2.**Chains, YellowLine grade 8,**
EN818-2.

Varenr. / Item no.	WLL tons/tonnes	Trækprøvet kN	Brudlast min. kN	D mm	E mm	H mm	Vægt / Weight kg
111-000-0008	2,0	50	80	8	24	27	1,4
111-000-0010	3,15	80	126	10	30	34	2,2
111-000-0013	5,3	132	214	13	39	44	3,7

**Ovalringe, YellowLine
type YMF
klasse 8**
EN1677-4.**Master links, YellowLine
type YMF
grade 8**
EN1677-4.

Varenr. / Item no.	WLL tons/tonnes	Til klasse 8-kæde/For Grade 8-Chain mm		IL mm	IW mm	D mm	Vægt / Weight kg
		1-strengt/ 1-legged	2-strengt/ 2-legged				
121-000-2500	2,0	8	6	120	70	14	0,4
121-000-4000	3,15	10	7,8	140	80	17	0,7
121-000-7500	5,13	13	10	160	95	22	1,5
121-001-0000	8,0	16	12	180	105	28	2,8

**Samleled, YellowLine
type YA
klasse 8**
EN1677-1.**Connecting links, YellowLine
type YA
grade 8**
EN1677-1.

Varenr. / Item no.	WLL tons/tonnes	Til klasse 8-kæde/ For Grade 8-Chain mm	K mm	A mm	D mm	B mm	Vægt / Weight kg
130-900-2000	2,0	8	57	18	9	22	0,2
130-900-3150	3,15	10	68	25	11	26	0,3
130-900-5300	5,3	13	91	30	16	35	0,7

yellowline




FYNS KRAN UDSTYR A/S
www.fku.dk

1-26

KÆDER & TILBEHØR / CHAINS & FITTINGS


1



**Sikkerhedskroge,
YellowLine
type YD
Klasse 8**
EN1677-4.

**Clevis self locking hooks,
YellowLine
type YD
Grade 8**
EN1677-3.


Varenr. / Item no.	WLL tons/tonnes	Til klasse 8-kæde/ For Grade 8-Chain mm	A mm	K mm	P mm	T mm	H mm	Vægt / Weight kg
143-300-2000	2,0	7,8	9	119	34	20	24	0,8
143-300-3150	3,15	10	11	143	44	26	30	1,4
143-300-5300	5,3	13	14	179	52	30	39	2,9



**Lastkroge, YellowLine
type YM
klasse 8**
EN1677-2.

**Clevis sling hooks, YellowLine
type YM
grade 8**
EN1677-2.

Varenr. / Item no.	WLL tons/tonnes	Til klasse 8-kæde/ For Grade 8-Chain mm	A mm	K mm	P1 mm	T mm	H mm	Vægt / Weight kg
143-320-2000	2,0	7,8	9	98	27	18	22	0,6
143-320-3150	3,15	10	11	121	34	23	29	1,2
143-320-5300	5,3	13	14	147	44	30	37	2,3



**Opkorterkrøge, YellowLine
type YH
klasse 8**
EN1677-1.

**Eye grab hooks, YellowLine
type YH
grade 8**
EN1677-1.

Varenr. / Item no.	WLL tons/tonnes	Til klasse 8-kæde/ For Grade 8-Chain mm	P mm	A mm	G mm	K mm	F mm	Vægt / Weight kg
143-310-2000	2,0	7,8	10	15	9	60	30	0,3
143-310-3150	3,15	10	13	20	13	84	41	0,6
143-310-5300	5,3	13	16	25	15	102	52	1,4

yellowline

ODENSE | KØBENHAVN | ESBJERG | AALBORG

+45 7015 2015 | fku@fku.dk




Gravemaskinekroge, YellowLine type YL klasse 8

Sikkerhedsfaktor 5:1.
Reparationssæt lagerføres.

Weld-on-hooks, YellowLine type YL grade 8

Safety factor 5:1.
Repair Kits are stocked.



Varenr. / Item no.	WLL tons/tonnes	A mm	F mm	H mm	L mm	M mm	P mm	T mm	W mm	Vægt / Weight kg
142-890-0010	1,0	7	25	27	72	6	18	17	95	0,6
142-890-0020	2,0	8	30	31	88	8	25	20	115	1,0
142-890-0030	3,0	9	35	30	107	10	28	23	133	1,4
142-890-0040	4,0	10	42	38	112	11	28	30	141	2,0
142-890-0050	5,0	12	44	46	133	13	30	31	167	3,0
142-890-0080	8,0	12	50	54	137	14	32	39	175	3,8
142-890-0100	10,0	13	56	56	168	16	44	42	222	6,3
142-890-0150	15,0	14	61	67	184	17	54	45	241	7,9




Tromlekroge, Crosby type S-377

WLL pr. sæt.
Sikkerhedsfaktor 4:1.
Sælges kun som sæt (2 stk.)

Barrel hooks, Crosby type S-377

WLL pr. set.
Safety factor 4:1.
Sold as a set (2 pcs.)

Crosby

Varenr. / Item no.	WLL tons/tonnes	b mm	d mm	h mm	Vægt / Weight kg
142-350-0040	1	71,5	39,6	127	1,6




Vores nye løfteguide er din guide til sikker brug af løfteudstyr. Den dækker løfteudstyr lavet af syntetiske fibre, stålwire og kæder sammen med ovalringe samt kroge og samleled. Manualen består af fire sektioner med hver sin farve, som kan bruges som opslagsværk og er skrevet i et let forståeligt sprog.

Kontakt os for at få et eksemplar.

Our new lifting guide is your guide on how to use lifting equipment in a safe way. The guide covers lifting equipment made of synthetic fibers, steel wire ropes and chains with master links, hooks and coupling links. The lifting guide has four sections, marked with different colors and it can be used as a reference, as well as it is easy to understand.

Contact us to get your copy*.

*The lifting guide is only available in Danish.



RUD-ICE, Klasse 12

RUD-ICE fordele:

– altid én diameter mindre end RUD klasse 8 med samme WLL!

På grund af det patenterede RUD-ICE materiales høje styrke muliggør RUD, for første gang, nu konstant at kunne bruge en kæde diameter mindre end RUD klasse 8 med samme WLL på dimensioner under 16 mm. Vægten reduceres med hele 30% og dermed en stor faktor i en bedre arbejdsergonomi.

RUD-ICE, Grade 12

RUD-ICE advantages:


– always one diameter thinner than RUD Grade 8 with the same WLL!

Due to the high durability of the patented RUD-ICE-material, RUD are able, for the first time, to continuously utilise a chain diameter smaller compared with RUD Grade 8 on diameters below 16 mm. The reduction in weight of more than 30% is a big factor in work ergonomics.



Kæde / Chain Dim. mm	WLL (kg) Kl. 8 / Gr. 80	WLL (kg) Kl. 12 / Gr. 120
6	-	1800
8	2000	3000
10	3150	5000
13	5300	8000
16	8000	12500
20	12500	-

	1-strengt / 1-legged	2-strengt / 2-legged		3+4-strengt / 3+4-legged		Endelos Endless
Anhængnings- måde/ Sling type						
Hældningsvinkel / Inclination < β	0°	0-45°	> 45-60°	0-45°	> 45-60°	-
Lastfaktor / Load Factor	1.0	1.4	1.0	2.1	1.5	1.6
Kæde dim. / Chain dim. mm	WLL i tons / in tonnes					
4	0.8	1.12	0.8	1.7	1.18	1.25
6	1.8	2.5	1.8	3.75	2.7	2.88
8	3.0	4.25	3.0	6.3	4.5	4.8
10	5.0	7.1	5.0	10.6	7.5	8.0
13	8.0	11.2	8.0	17.0	11.8	12.8
16	12.5	17.0	12.5	26.5	19.0	20.0

**Kæder, RUD, ICE-IMK klasse 12**

RUD ICE-IMK klasse 12 er fremstillet og hærdet med et unikt patenteret materiale. Overflade: RUD-ICE Pink (pulverlakeret). Sikkerhedsfaktor 4:1.

Chains, RUD, ICE-IMK grade 12

RUD ICE-IMK is manufactured and tempered with a unique patented material. Surface: RUD-ICE Pink (powder coated). Safety factor 4:1.

Varenr. / Item no.	Dim. mm	WLL tons / tonnes	Trækprøve / Pulling test kN	MBL min. kN	d mm	P mm	W1 mm	Vægt / Weight kg/m
114-000-0004	4	0,8	19,6	31,4	4	12	5,2	0,44
114-000-0006	6	1,8	44,1	71	6	18	7,8	0,98
114-000-0008	8	3,0	73,5	118	8	24	10,4	1,66
114-000-0010	10	5,0	123	196	10	30	13	2,62
114-000-0013	13	8,0	196	314	13	39	17	4,25
114-000-0016	16	12,5	314	503	16	48	21	6,72


**Ovalringe for 1 streng, RUD,
type ICE-IAK-RG, klasse 12**

Designet til brug på 1-strengt kædesæt. Udstyret med IRG-Clevis samleled, som sikrer korrekt tilslutning og at kun den korrekte kædediameter kan bruges. Sikkerhedsfaktor 4:1.

**Master links for 1 leg, RUD,
type ICE-IAK-RG, grade 12**

Designed for use on chain-slugs with 1 leg. Fitted with IRG-Connector that insures only the correct chain diameter can be used. Safety factor 4:1.

Varenr. / Item no.	Type	Dim. mm	WLL tons/tonnes	Ø A mm	B mm	C mm	T mm	Vægt / Weight kg
124-100-0100	IAK-1/2-4	4	0,8	13	34	38	58	0,20
124-100-1010	IAK-RG-1-6	6	1,8	13	60	110	144	0,57
124-100-1020	IAK-RG-1-8	8	3,0	16	75	135	178	1,04
124-100-1030	IAK-RG-1-10	10	5,0	22	90	160	213	2,19
124-100-1040	IAK-RG-1-13	13	8,0	26	100	180	247	3,58
124-100-1050	IAK-RG-1-16	16	12,5	32	140	260	343	7,20






Ovalringe for 2 strenge, RUD, type ICE-IAK-RG, klasse 12

Designet til brug på 2-strengt kædesæt. Udstyret med 2 stk. IRG-Clevis samleled, som sikrer korrekt tilslutning og at kun den korrekte kædediameter kan bruges. Sikkerhedsfaktor: 4:1.

Master links for 2 legs, RUD, type ICE-IAK-RG, grade 12

Designed for use on chain-slings with 2 legs. Fitted with IRG-Connectors that insures only the correct chain diameter can be used. Safety factor 4:1.

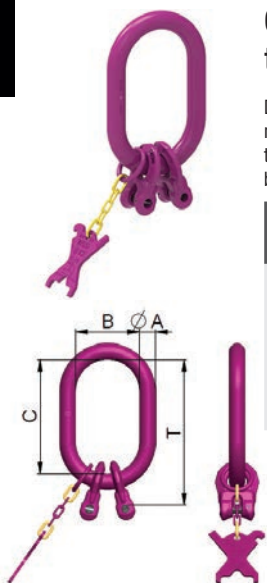

Varenr. / Item no.	Type	Dim. mm	WLL tons/tonnes 0-45°	WLL tons/tonnes > 45-60°	Ø A mm	B mm	C mm	T mm	Vægt / Weight kg
124-100-0100	IAK-1/2-4	4	1,12	0,8	13	34	38	58	0,20
124-100-1200	IAK-RG-2-6	6	2,5	1,8	16	75	15	171	1,00
124-100-1210	IAK-RG-2-8	8	4,25	3,0	22	90	160	203	2,10
124-100-1220	IAK-RG-2-10	10	7,1	5,0	26	100	180	233	3,50
124-100-1230	IAK-RG-2-13	13	11,2	8,0	32	110	200	267	6,70
124-100-1240	IAK-RG-2-16	16	17,0	12,5	36	180	340	423	13,00




Ovalringe for 4 strenge, RUD, type ICE-IAK-RG, klasse 12

Designet til brug på 4-strengt kædesæt. Udstyret med VRG-Clevis samleled, som sikrer korrekt tilslutning og at kun den korrekte kædediameter kan bruges. Sikkerhedsfaktor: 4:1.

Master links for 4 legs, RUD, type ICE-IAK-RG, grade 12

Designed for use on chain slings with 4 legs. Fitted with VRG-Connectors that insures only the correct chain diameter can be used. Safety factor 4:1.

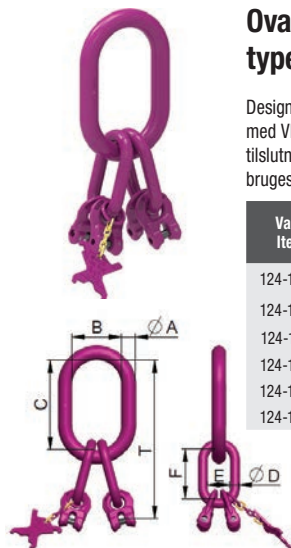

Varenr. / Item no.	Type	Dim. mm	WLL tons/tonnes 0-45°	WLL tons/tonnes > 45-60°	Ø A mm	B mm	C mm	Ø D mm	E mm	F mm	T mm	Vægt / Weight kg
124-100-0110	IAK-3/4-4	4	1,7	1,18	10	35	60	-	-	-	120	0,53
124-100-1400	IAK-RG-4-6	6	3,75	2,7	18	90	160	13	34	70	265	2,04
124-100-1410	IAK-RG-4-8	8	6,3	4,5	26	100	180	18	40	85	309	4,59
124-100-1420	IAK-RG-4-10	10	10,6	7,5	32	110	200	22	50	115	369	8,37
124-100-1430	IAK-RG-4-13	13	17,0	11,8	36	140	260	26	65	140	467	14,44
124-100-1440	IAK-RG-4-16	16	26,5	19,0	42	190	350	32	75	170	603	28,87


**Clevis samleled, RUD, type
ICE-IRG
klasse 12**

Sikkerhedsfaktor: 4:1.

Varenr. / Item no.	Type	Dim. mm	WLL tons/tonnes	A mm	B mm	C mm	D mm	E mm	F mm	T mm	Vægt / Weight kg
145-200-0710	IRG-6	6	1,8	19	34	44	21	9	12	36	0,12
145-200-0720	IRG-8	8	3,0	24	45	56	27	12	15	43	0,25
145-200-0730	IRG-10	10	5,0	30	56	70	32	15	19	53	0,50
145-200-0740	IRG-13	13	8,0	38	73	88	38	18	25	67	1,00
145-200-0750	IRG-16	16	12,5	47	90	109	48	23	31	83	2,00

**Clevis connector, RUD
type ICE-IRG
grade 12**

Safety factor: 4:1.

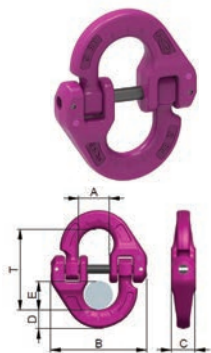**Samleled, RUD, type ICE-IVS
klasse 12**

Sikkerhedsfaktor: 4:1.

Varenr. / Item no.	Type	Dim. mm	WLL tons/tonnes	A mm	B mm	C mm	D mm	E mm	F mm	T mm	Vægt / Weight kg
145-200-0610	IVS-6	6	1,8	18	55	13	11	17	21	46	0,12
145-200-0620	IVS-8	8	3,0	24	70	17,5	14	23	27,5	61	0,29
145-200-0630	IVS-10	10	5,0	28	88	22	17	27	32	74	0,57
145-200-0640	IVS-13	13	8,0	34	111	28	23	33	40	93	1,20
145-200-0650	IVS-16	16	12,5	39	130	33	27	37	46	108	2,00

**Coupling links, RUD
type ICE-IVS, grade 12**

Safety factor: 4:1.

**Kædeopkortere, RUD type
ICE-IMVK
klasse 12**

Multiopkortere – kan monteres på enhver position langs kæden. Ingen yderligere komponenter påkrævet. Fremstillet i henhold til DIN 5692. Sikkerhedsfaktor: 4:1.

Varenr. / Item no.	Type	Dim. mm	WLL tons/tonnes	A mm	B1 mm	B2 mm	G mm	T mm	Vægt / Weight kg
145-200-0110	IMVK-6	6	1,8	35	34	40	36	66	0,30
145-200-0120	IMVK-8	8	3,0	46	41	52	48	88	0,55
145-200-0130	IMVK-10	10	5,0	58	50	64	60	110	1,10
145-200-0140	IMVK-13	13	8,0	74	64	86	76	143	2,40
145-200-0150	IMVK-16	16	12,5	91	79	105	98	176	4,40

**Midgrab shorteners, RUD
type ICE-IMVK
grade 12**

Multi-Shortening claw – can be fitted to any position along the chain. No additional components required. Produced according to DIN 5692. Safety factor: 4:1.



Opkorterkrøge, RUD type ICE-IVH, klasse 12

Ingen reduktion af WLL. Fremstillet i henhold til DIN 5692. Sikkerhedsfaktor 4:1.

Shortening hooks, RUD type ICE-IVH, grade 12

No reduction of the WLL. Produced in accordance with DIN 5692. Safety factor: 4:1.

Varenr. / Item no.	Type	Dim. mm	WLL tons/tonnes	A mm	B mm	C mm	D mm	E mm	F mm	T mm	Vægt / Weight kg
145-200-0210	IVH-6	6	1,8	34	18	20	44	7,5	22	53	0,27
145-200-0220	IVH-8	8	3,0	43	24	26	55	9,5	29	67	0,50
145-200-0230	IVH-10	10	5,0	55	30	34	71	12	38	86	1,20
145-200-0240	IVH-13	13	8,0	70	38	43	90	15	48	105	2,50
145-200-0250	IVH-16	16	12,5	86	46	53	110	18,5	59	128	4,50




Lastkrøge med pal, RUD type ICE-ISH, klasse 12

25% lettere end tilsvarende klasse 8 lastkrog fra RUD med samme WLL. Sikkerhedsfaktor 4:1.

Sling hooks with latch, RUD type ICE-ISH, grade 12

25 % lighter than RUD grade 80 sling hooks with the same WLL. Safety factor: 4:1.

Varenr. / Item no.	Type	Dim. mm	WLL tons/tonnes	A mm	B mm	C mm	D mm	F mm	F max mm	G mm	T mm	Vægt / Weight kg
145-200-0300	Mini-IMH-4	4	0,8	22	15	13	14,5	20	-	53	55	0,16
145-200-0410	ISH-6	6	1,8	48	28	18	26	30	51	97	97	0,69
145-200-0420	ISH-8	8	3,0	45	36	20	29	36	58	110	110	1,10
145-200-0430	ISH-10	10	5,0	71	43	25	37	41	66	127	127	1,90
145-200-0440	ISH-13	13	8,0	85	52	31	48	50	80	153	153	3,50
145-200-0450	ISH-16	16	12,5	94	58	38	56	58	96	184	184	5,50






Sikkerhedskroge, RUD type ICE-IAGH, klasse 12

30% lettere end tilsvarende klasse 8
sikkerhedskrog fra RUD med samme WLL. Stor
krog-åbning. Sikkerhedsfaktor: 4:1.

Clevis self locking hooks, RUD type ICE-IAGH, grade 12

30 % lighter than RUD grade 80 clevis self locking
hooks with the same WLL. Large hook width.
Safety factor: 4:1.

Varenr. / Item no.	Type	Dim. mm	WLL tons/ton- nes	A mm	B mm	C mm	D mm	E mm	F mm	F _{max} mm	T mm	Vægt / Weight kg
145-200-0510	IAGH-6	6	1,8	34	24	27	28	97	44	60	1113	0,90
145-200-0520	IAGH-8	8	3,0	45	31	30	31	106	48	66	124	1,20
145-200-0530	IAGH-10	10	5,0	50	38	36	40	136	61	81	154	2,40
145-200-0540	IAGH-13	13	8,0	73	50	44	51	173	78	107	200	4,90
145-200-0550	IAGH-16	16	12,5	90	61	49	53	192	85	121	232	7,40

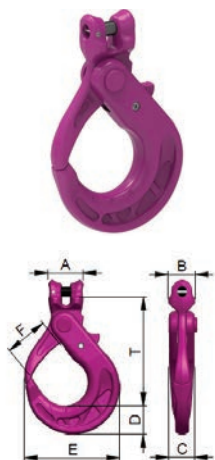

Støberikroge, RUD type ICE-IWH, klasse 12


Uden sikkerhedslås. Bruges kun hvor uilsigtet
afkobling er umulig. Sikkerhedsfaktor: 4:1.

Foundry hooks, RUD type ICE-IWH, grade 12

Only for use where unintentional unhooking is
impossible. Safety factor: 4:1.

Varenr. / Item no.	Type	Dim. mm	WLL tons/ton- nes	A mm	B mm	C mm	D mm	E mm	F mm	G mm	T mm	Vægt / Weight kg
145-200-1210	IWH-6	6	1,8	41	31	24	42	29	64	32	121	1,00
145-200-1220	IWH-8	8	3,0	49	37	29	50	36	76	40	143	1,76
145-200-1230	IWH-10	10	5,0	58	44	31	64	46	90	47	168	3,00
145-200-1240	IWH-13	13	8,0	66	50	39	75	56	100	55	193	4,70
145-200-1250	IWH-16	16	12,5	75	56	43	90	58	114	61	208	6,50



TYPE APPROVED PRODUCT
CERTIFICATION NO. 3.1.1
CERTIFICATE NO. 3.488

VAN BEEST



Sjækler, standard, Green Pin® type G-4161

Sjækler med farvet bolt.

Materiale: Højstyrkestål, klasse 6.**Sikkerhedsfaktor:** MBL lig med 6 x WLL.**Standard:** EN 13889 og opfylder krav fra US Fed.

Spec. RR-C-271 Type IVA Class 2, Grade A.


Overflade: Varmgalvaniseret.**Temperatur interval:** -40°C op til +200°C.**Certifikater:** Kan leveres - 2.1, 2.2, 3.1, MTC, DNV
2.7.1, DNV 2.22 og CE.

Shackles, standard, Green Pin® type G-4161

Bow shackles with screw color pin.

Material: Bow and pin high tensile steel, grade 6,
quenched and tempered.**Safety factor:** MBL equals 6 x WLL.**Standard:** EN 13889 and meets performance
requirements of US Fed. Spec. RR-C-271 Type IVA Class
2, Grade A.**Finish:** Hot dipped galvanized.**Temperature range:** -40°C up to +200°C.**Certificates:** Can be supplied - 2.1, 2.2, 3.1, MTC, DNV
2.7.1, DNV 2.22 and CE.

Varenr. / Item no.	WLL tons/tonnes	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	Vægt / Weight kg
150-500-0330	0,33	5	6	12,5	5	9,5	22	16	41	31	28	0,02
150-500-0500	0,50	7	8	17	7	12	29	20	54	40	37	0,05
150-500-0750	0,75	9	10	21	9	13,5	32	22	61	49	42	0,10
150-500-1000	1,00	10	11	23	10	17	36,5	26	71	56	49	0,14
150-500-1500	1,50	11	13	26	11	19	43	29	80	68	54	0,19
150-500-2000	2,00	13,5	16	34	13,5	22	51	32	91	76	63	0,36
150-500-3250	3,25	16	19	40	16	27	64	43	114	93	79	0,63
150-500-4750	4,75	19	22	47	19	31	76	51	136	107	94	1,01
150-500-6500	6,50	22	25	53	22	36	83	58	157	123	107	1,50
150-500-8500	8,50	25	28	60	25	43	95	68	176	141	124	2,21
150-500-9500	9,50	28	32	67	28	47	108	75	197	158	137	3,16
150-501-2000	12,00	32	35	74	32	51	115	83	218	176	154	4,31
150-501-3500	13,50	35	38	80	35	57	133	92	240	192	170	5,55
150-501-7000	17,00	38	42	89	38	60	146	99	262	208	183	7,43
150-502-5000	25,00	45	50	104	45	74	178	126	314	250	226	12,84
150-503-5000	35,00	50	57	119	50	83	197	138	358	281	250	18,15
150-504-2500	42,50	57	65	134	57	95	222	160	414	321	287	26,29
150-505-5000	55,00	65	70	145	65	105	260	185	463	355	329	37,60

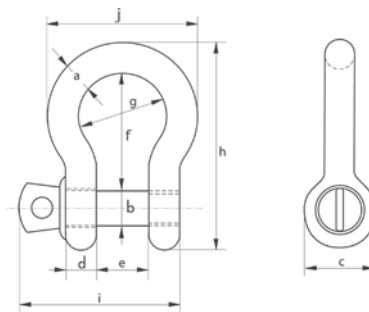

**FYNS KRAN Udstyr A/S****www.fku.dk****KÆDER & TILBEHØR / CHAINS & FITTINGS****1-35**TYPE APPROVED PRODUCT
CERTIFICATION NO. 5-1
CERTIFICATE NO. 5-406**VAN BEEST****Sjækler, standard, Green Pin®
type G-4163**

Sjækler med sikkerhedsbolt.

Materiale: Højstyrkestål, klasse 6.**Sikkerhedsfaktor:** MBL lig med 6 x WLL.**Standard:** EN 13889 og opfylder krav fra US Fed.

Spec. RR-C-271 Type IVA Class 3, Grade A.

Overflade: Varmgalvaniseret.**Temperatur interval:** -40°C op til +200°C.**Certifikater:** Kan leveres - 2.1, 2.2, 3.1, MTC, DNV 2.7.1, DNV 2.22 og CE.**Shackles, standard, Green Pin®
type G-4163**



Bow shackles with safety bolt.


Material: Bow and pin high tensile steel, grade 6, quenched and tempered.**Safety factor:** MBL equals 6 x WLL.**Standard:** EN 13889 and meets performance requirements of US Fed.

Spec. RR-C-271 Type IVA Class 3, Grade A.

Finish: Hot dipped galvanized.**Temperature range:** -40°C up to +200°C.**Certificates:** Can be supplied - 2.1, 2.2, 3.1, MTC, DNV 2.7.1, DNV 2.22 and CE.**1**

Varenr. / Item no.	WLL tons/tonnes	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	Vægt / Weight kg
150-550-0500	0,50	7	8	17	7	12	29	20	54	43	37	4	0,06
150-550-0750	0,75	9	10	21	9	13,5	32	22	61	51	42	5	0,11
150-550-1000	1,00	10	11	23	10	17	36,5	26	71	61	49	8	0,16
150-550-1500	1,50	11	13	26	11	19	43	29	80	68	54	11	0,22
150-550-2000	2,00	13,5	16	34	13,5	22	51	32	91	83	63	13	0,42
150-550-3250	3,25	16	19	40	16	27	64	43	114	99	79	17	0,74
150-550-4750	4,75	19	22	47	19	31	76	51	136	115	94	20	1,18
150-550-6500	6,50	22	25	53	22	36	83	58	157	131	107	23	1,77
150-550-8500	8,50	25	28	60	25	43	95	68	176	151	124	25	2,58
150-550-9500	9,50	28	32	67	28	47	108	75	197	167	137	28	3,66
150-551-2000	12,00	32	35	74	32	51	115	83	218	179	154	31	4,91
150-551-3500	13,50	35	38	80	35	57	133	92	240	198	170	34	6,54
150-551-7000	17,00	38	42	89	38	60	146	99	262	203	183	19	8,19
150-552-5000	25,00	45	50	104	45	74	178	126	314	244	226	24	14,22
150-553-5000	35,00	50	57	119	50	83	197	138	358	270	250	27	19,85
150-554-2500	42,50	57	65	134	57	95	222	160	414	302	287	30	28,33
150-555-5000	55,00	65	70	145	65	105	260	180	463	330	329	33	39,59
150-558-5000	85,00	75	83	163	75	127	329	190	556	376	355	40	62,00

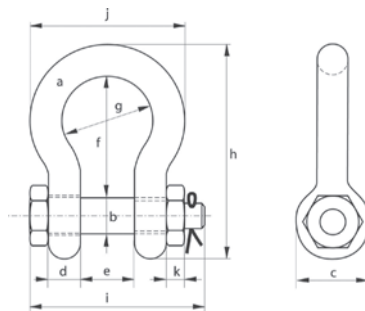**ODENSE | KØBENHAVN | ESBJERG | AALBORG****+45 7015 2015 | fku@fku.dk**



FYNS KRAN UDSTYR A/S
www.fku.dk

1-36

KÆDER & TILBEHØR / CHAINS & FITTINGS

1



Sjækler, heavy duty, Green Pin® type P6036

Sjækler med sikkerhedsbolt.





Materiale: Højstyrkestål, klasse 8.
Sikkerhedsfaktor: MBL lig med 5 x WLL.
Certifikater: Kan leveres - 2.1, 2.2, 3.1,
MTC, LROS, MPI, US og CE.
+5% tolerance indv. lgd/brd.

Shackles, heavy duty, Green Pin® type P6036

Bow shackles with safety bolt.

Material: Bow and pin high tensile steel, grade 8,
quenched and tempered.
Safety factor: MBL equals 5 x WLL.
Certificates: Can be supplied - 2.1, 2.2, 3.1, MTC,
LROS, MPI, US and CE.
Tolerance: Forged parts $\pm 5\%$.

Varenr. / Item no.	WLL tons/tonnes	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	Vægt / Weight kg
150-700-0120	120	95	95	215	89	144	381	238	667	440	416	50	110
150-700-0150	150	105	108	245	100	165	400	275	702	490	485	60	160
150-700-0200	200	120	130	288	110	175	500	290	854	520	530	60	235
150-700-0250	250	130	140	308	115	200	540	305	921	560	565	65	285
150-700-0300	300	140	150	335	120	200	600	305	1018	575	585	70	340
150-700-0400	400	170	175	387	160	225	650	325	1137	690	665	70	560
150-700-0500	500	180	185	410	160	250	700	350	1213	710	710	70	685
150-700-0600	600	200	205	458	185	275	700	375	1267	810	775	70	880
150-700-0700	700	210	215	468	200	300	700	400	1287	850	820	70	980
150-700-0800	800	210	220	478	200	300	700	400	1294	870	820	70	1100
150-700-0900	900	220	230	500	210	320	700	420	1320	920	860	70	1280
150-700-1000	1000	240	240	530	210	340	700	420	1360	940	900	70	1460
150-700-1250	1250	260	270	600	225	360	700	450	1430	1020	970	70	1990
150-700-1500	1500	280	290	640	225	360	700	450	1480	1060	1010	70	2400



ODENSE | KØBENHAVN | ESBJERG | AALBORG

+45 7015 2015 | fku@fku.dk



Sjækler, GN (wide body) til beskyttelse af rundsling type H14



Materiale : Legeret og hærdet stål.
 Sikkerhedsfaktor : Op til og inkl. 2000 tons
 – 5 x sikkerhed
 Overfladebehandling : Malet.
 Følgende certifikater : Producentcertifikat.
 kan leveres : Prøvebelastningscertifikat.
 Klassifikations-
 inspektionscertifikater
 (DNV, Lloyds, ABS, BV,
 m.fl.).



Shackles, GN forged rope type H14 sling protector (wide body)

Material : Alloy steel quenched and tempered.
 Safety factor : Up and including 2000 ton 5 times
 Finish : Painted.
 Certificates : Material certificate.
 on request : Manufacturer certificate.
 Proofload certificate.
 Classification inspection certificate
 (DNV, Lloyds, ABS, BV ect.).

Varenr. / Item no.	WLL tons/ tonnes	A mm	B mm	C mm	D mm	E mm	F mm	G mm	R mm	X mm	Y mm	Vægt / Weight kg
152-000-0030	30	35	44	65	180	90	128	80	45	204	292	14
152-000-0040	40	45	51	84	200	109	140	97	53	232	331	21
152-000-0055	55	65	56	95	250	130	160	110	55	288	400	33
152-000-0075	75	75	70	110	300	150	185	120	60	334	485	53
152-000-0125	125	85	80	140	370	165	220	150	80	390	583	84
152-000-0150	150	90	95	150	400	200	250	170	90	429	638	115
152-000-0200	200	105	105	160	480	225	275	205	110	484	755	183
152-000-0250	250	120	120	180	550	240	300	230	125	540	850	255
152-000-0300	300	140	134	195	600	280	350	265	140	628	947	368
152-000-0400	400	160	160	230	620	330	370	320	170	689	1035	571
152-000-0500	500	170	180	265	680	350	440	340	180	779	1125	719
152-000-0600	600	180	200	290	720	405	490	370	190	847	1213	960
152-000-0700	700	210	215	320	780	465	540	400	210	957	1330	1350
152-000-0800	800	220	230	320	800	465	555	420	220	990	1358	1400
152-000-0900	900	235	250	370	850	480	585	440	235	1060	1450	1850
152-000-1000	1000	235	270	400	850	530	615	460	240	1091	1490	2050
152-000-1250	1250	275	300	455	960	570	645	560	285	1205	1695	3000
152-000-1500	1550	275	320	485	980	610	680	580	290	1240	1745	3300
152-000-1750	1750	310	360	500	1120	660	700	600	300	1346	1960	4700
152-000-2000	2000	320	385	520	1140	680	720	620	310	1368	2012	4800

Tolerance: Forged parts $\pm 5\%$, machined parts ± 1 mm.

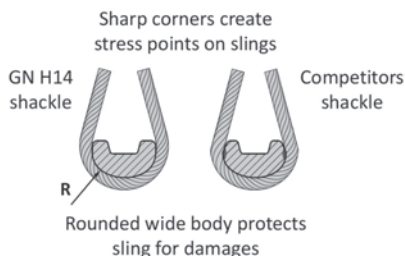



Stålsjækler, Crosby type G-209

Standard: US Federal specifikation.

RR-271 D. Type IV A Grade A,

Klasse 2. Sikkerhedsfaktor: 6:1.

EN13889 NORM.

+/- 5% tolerance indv. lgd/brd.

Shackles, Crosby type G-209

Standard: US Federal specifikation.


RR-271 D. Type IV A Grade A,

Class 2. Safety Factor: 6:1.

EN13889 NORM.

Tolerance: Forged parts $\pm 5\%$.

Varenr. / Item no.	Dim. tommer/inches	WLL tons/tonnes	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	L mm	M mm	P+ mm	Tolerance + / -	Tolerance + / -	Vægt / Weight kg
150-200-0500	1/4	0,50	11,9	7,9	28,7	6,35	19,8	15,5	32,5	46,7	4,85	35,1	6,35	1,50	1,50	0,05
150-200-0750	5/16	0,75	13,5	9,7	31,0	7,87	21,3	19,1	37,3	53,0	5,60	42,2	7,85	3,30	1,50	0,09
150-200-1000	3/8	1,00	16,8	11,2	36,6	9,65	26,2	23,1	45,2	63,5	6,35	51,5	9,65	3,30	1,50	0,14
150-200-1500	7/16	1,50	19,0	12,7	42,9	11,20	29,5	26,9	51,5	74,0	7,85	60,5	11,2	3,30	1,50	0,17
150-200-2000	1/2	2,00	20,6	16,0	47,8	12,70	33,3	30,2	58,5	83,5	9,65	68,5	12,7	3,30	1,50	0,33
150-200-3250	5/8	3,25	26,9	19,1	60,5	16,00	42,9	38,1	74,5	106,0	11,2	85,0	17,5	6,35	1,50	0,62
150-200-4750	3/4	4,75	31,8	22,4	71,5	19,10	51,0	46,0	89,0	126,0	12,7	101,0	20,6	6,35	1,50	1,07
150-200-6500	7/8	6,50	36,6	25,4	84,0	6,50	58,0	53,0	102,0	148,0	12,7	114,0	24,6	6,35	1,50	1,64
150-200-8500	1	8,50	42,9	28,7	95,5	8,50	68,5	60,5	119,0	167,0	14,2	129,0	26,9	6,35	1,50	2,28
150-200-9500	1 1/8	9,50	46,0	31,8	108,0	9,50	74,0	68,5	131,0	190,0	16,0	142,0	31,8	6,35	1,50	3,36
150-201-2000	1 1/4	12,00	51,5	35,1	119,0	12,00	82,5	76,0	146,0	210,0	17,5	156,0	35,1	6,35	1,50	4,31
150-201-3500	1 3/8	13,50	57,0	38,1	133,0	13,50	92,0	84,0	162,0	234,0	19,1	174,0	38,1	6,35	3,30	6,14
150-201-7000	1 1/2	17,00	60,5	41,4	146,0	17,00	98,5	92,0	175,0	254,0	20,6	187,0	41,1	6,35	3,30	7,80
150-202-5000	1 3/4	25,00	73,0	51,0	178,0	25,00	127,0	106,0	225,0	313,0	25,4	231,0	51,0	6,35	3,30	12,60
150-203-5000	2	35,00	82,5	57,0	197,0	35,00	146,0	122,0	253,0	347,0	31,0	263,0	67,0	6,35	3,30	20,40
150-205-5000	2 1/2	55,00	105,0	70,0	267,0	55,00	184,0	145,0	327,0	453,0	35,1	330,0	79,5	6,35	6,35	38,90



Stålsjækler, Crosby type G-2130

Standard: US Federal specifikation.

RR-271 D. Type IV A Grade A,

Klasse 3. Sikkerhedsfaktor: 6:1.

EN13889.

+/- 5% tolerance indv. lgd/brd.

Shackles, Crosby type G-2130

Standard: US Federal specifikation.

RR-271 D. Type IV A Grade A,

Class 3. Safety Factor: 6:1.

EN13889.

Tolerance: Forged parts $\pm 5\%$.

Varenr. / Item no.	Dim. tommer/inches	WLL tons/tonnes	A mm	B mm	C mm	D mm	E mm	F mm	H mm	L mm	N mm	Tolerance + / -	Tolerance + / -	Vægt / Weight kg
150-250-1000	3/8	1,00	16,8	11,2	36,5	9,65	26,1	23,1	63,0	45,2	9,65	3,30	1,50	0,15
150-250-1500	7/16	1,50	19,1	12,7	42,9	11,20	29,5	26,9	74,0	51,5	11,2	3,30	1,50	0,22
150-250-2000	1/2	2,00	20,6	16,0	47,7	12,70	33,3	30,2	83,5	58,5	12,7	3,30	1,50	0,36
150-250-3250	5/8	3,25	26,9	19,1	60,5	16,00	42,9	38,1	106,0	74,5	17,5	6,35	1,50	0,62
150-250-4750	3/4	4,75	31,8	22,4	71,0	19,10	51,0	46,0	126,0	89,0	20,6	6,35	1,50	1,23
150-250-6500	7/8	6,50	36,6	25,4	84,0	22,40	58,0	53,0	148,0	102,0	24,6	6,35	1,50	1,79
150-250-8500	1	8,50	42,9	28,7	95,0	25,40	68,5	60,5	167,0	119,0	26,9	6,35	1,50	2,28
150-250-9500	1 1/8	9,50	46,0	31,8	108,0	28,70	74,0	68,5	190,0	131,0	31,8	6,35	1,50	3,75
150-251-2000	1 1/4	12,00	51,5	35,1	119,0	31,80	82,5	76,0	210,0	146,0	35,1	6,35	1,50	5,31
150-251-3500	1 3/8	13,50	57,0	38,1	133,0	35,10	92,0	84,0	233,0	162,0	38,1	6,35	3,30	7,18
150-251-7000	1 1/2	17,00	60,5	41,4	146,0	38,10	98,5	92,0	254,0	175,0	41,1	6,35	3,30	8,62
150-252-5000	1 3/4	25,00	73,0	51,0	178,0	44,50	127,0	106,0	313,0	225,0	57,0	6,35	3,30	15,40
150-253-5000	2	35,00	82,5	57,0	197,0	51,00	146,0	122,0	348,0	253,0	61,0	6,35	3,30	23,70
150-255-5000	2 1/2	55,00	105,0	70,0	267,0	66,50	184,0	145,0	453,0	327,0	79,5	6,35	6,35	44,60
150-258-5000	3	85,00	127,0	82,5	330,0	76,00	200,0	165,0	546,0	365,0	92,0	6,35	6,35	70,00
150-259-9120	3 1/2	120,00	133,0	95,0	372,0	92,00	229,0	203,0	626,0	419,0	105,0	6,35	6,35	120,00
150-259-9150	4	150,00	140,0	108,0	368,0	104,00	254,0	229,0	653,0	468,0	116,0	6,35	6,35	153,00

**Sjækler, YellowLine**

Standard: US Federal specification RR-271 D / EN 13889. Type IV A Grade, Klasse 2.

Leveres varmgalvaniseret.

Sikkerhedsfaktor: 6:1.

+/- 5% tolerance indv. lgd/brd.


Shackles

Standard: US Federal specification RR-271 D / EN 13889. Type IV A Grade, Class 2.

Hot dip galvanized.

Safety Factor: 6:1.

Tolerance: Forged parts $\pm 5\%$.

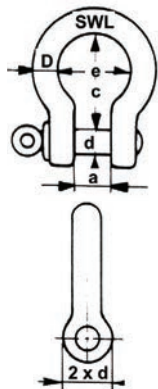

Varenr. / Item no.	Dim. tommer/inches	WLL tons/tonnes	D mm	d mm	a mm	c mm	e mm	Vægt / Weight kg
150-920-0330	-	0,33	5	6	9	22	16	0,03
150-920-0500	1/4	0,50	6	8	12	28	20	0,05
150-920-0750	5/16	0,75	8	10	13	31	21	0,08
150-920-1000	3/8	1,00	10	11	16	36	26	0,14
150-920-1500	7/16	1,50	11	13	18	43	29	0,20
150-920-2000	1/2	2,00	13	16	22	51	32	0,34
150-920-3250	5/8	3,25	16	19	26	64	43	0,63
150-920-4750	3/4	4,75	19	22	31	76	51	0,95
150-920-6500	7/8	6,50	22	25	36	83	58	1,55
150-920-8500	1	8,50	25	28	43	95	68	2,30
150-920-9500	1 1/8	9,50	28	32	47	108	75	3,24
150-921-2000	1 1/4	12,00	32	35	51	115	83	4,40
150-921-3500	1 3/8	13,50	35	38	57	133	92	6,00
150-921-7000	1 1/2	17,00	38	42	60	146	99	7,50
150-922-5000	1 3/4	25,00	45	50	74	178	126	14,00
150-923-5000	2	35,00	50	57	83	197	146	18,90

Sjækler, YellowLine

Standard: US Federal specification RR-271 D / EN 13889. Type IV A Grade, Klasse 3.

Leveres varmgalvaniseret.

Sikkerhedsfaktor: 6:1.

+/- 5% tolerance indv. lgd/brd.


Shackles

Standard: US Federal specification RR-271 D / EN 13889. Type IV A Grade, Class 3.

Hot dip galvanized.

Safety Factor: 6:1.

Tolerance: Forged parts $\pm 5\%$.

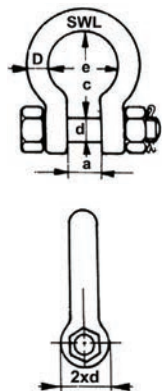

Varenr. / Item no.	Dim. tommer/inches	WLL tons/tonnes	D mm	d mm	a mm	c mm	e mm	Vægt / Weight kg
150-940-0500	1/4	0,50	6	8	12	28	20	0,05
150-940-0750	5/16	0,75	8	10	13	31	21	0,10
150-940-1000	3/8	1,00	10	11	16	36	26	0,14
150-940-1500	7/16	1,50	11	13	18	43	29	0,20
150-940-2000	1/2	2,00	13	16	22	51	32	0,34
150-940-3250	5/8	3,25	16	19	26	64	43	0,63
150-940-4750	3/4	4,75	19	22	31	76	51	0,95
150-940-6500	7/8	6,50	22	25	36	83	58	1,55
150-940-8500	1	8,50	25	28	43	95	68	2,30
150-940-9500	1 1/8	9,50	28	32	47	108	75	3,24
150-941-2000	1 1/4	12,00	32	35	51	115	83	4,40
150-941-3500	1 3/8	13,50	35	38	57	133	92	6,00
150-941-7000	1 1/2	17,00	38	42	60	146	99	7,50
150-942-5000	1 3/4	25,00	45	50	74	178	126	14,00
150-943-5000	2	35,00	50	57	83	197	146	18,90



FYNS KRAN UDSTYR A/S
www.fku.dk

1-40

KÆDER & TILBEHØR / CHAINS & FITTINGS

1



Svirvelsjækler, Crosby type G-403

Sænksmedet galvaniseret.

Swivel shackles, Crosby type G-403


Drop-forged, galvanized.

Varenr. / Item no.	Dim. tommer/inches	WLL tons/tonnes	a mm	b mm	c mm	k mm	n mm	p mm	r mm	Vægt / Weight kg
170-300-0390	1/4	0,39	32	18	19	12	22	6	67	0,11
170-300-0570	5/16	0,57	41	21	25	13	22	8	75	0,15
170-300-1020	3/8	1,02	51	24	32	16	27	10	92	0,32
170-300-1630	1/2	1,63	64	34	38	19	33	13	114	0,65
170-300-2360	5/8	2,36	76	40	45	24	38	16	135	1,12
170-300-3270	3/4	3,27	89	45	51	29	45	19	154	1,76
170-300-4540	7/8	4,54	102	52	57	30	52	22	178	2,66
170-300-5670	1	5,67	114	59	64	45	71	29	217	4,46
170-300-8160	1 1/4	8,16	143	68	79	52	71	35	240	7,14
170-302-0500	1 1/2	20,5	178	106	102	73	113	57	374	24,8



ODENSE | KØBENHAVN | ESBJERG | AALBORG

+45 7015 2015 | fku@fku.dk

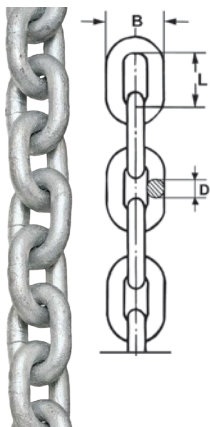
**Kæder, kortleddet
galvaniseret
DIN 766**

Lagerføres i bundter à 30 m. Andre længder kan leveres på bestilling. Må ikke benyttes til løft.

**Chains, short-link
galvanized
DIN 766**

Stocked in bundles of 30 m. Other lengths supplied to order. Not approved for lifting.

Varenr. / Item no. galv./galv.	Dim. mm	D mm	B mm	L mm	Vægt / Weight kg/m	MBL kg
110-550-0416	4x16	4	16	19	0,30	500
110-550-0519	5x20	5	20	21	0,50	775
110-550-0619	6x18,5	6	18,5	20	0,75	1150
110-550-0824	8x24	8	24	27,2	1,35	2000
110-551-1028	10x28	10	28	34	2,25	3100
110-551-1336	13x36	13	36	44,2	3,45	5300

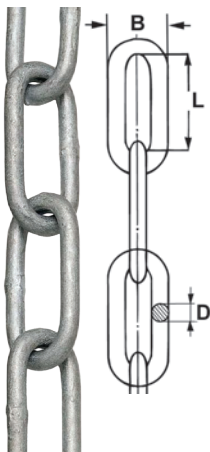**Kæder, langedleddet
galvaniseret
DIN 763**

Lagerføres i bundter à 30 m. Andre længder kan leveres på bestilling. Må ikke benyttes til løft.

**Chains, long-link
galvanized
DIN 763**

Stocked in bundles of 30 m. Other lengths supplied to order. Not approved for lifting.

Varenr. / Item no. galv./galv.	Dim. mm	D mm	B mm	L mm	Vægt / Weight kg/m	MBL kg
110-711-0326	3x26	3,0	12	26	0,15	280
110-711-0432	4x32	4,0	16	32	0,27	500
110-711-0536	5x35	5,0	20	36	0,43	775
110-711-0642	6x42	6,0	24	42	0,63	1150
110-711-0854	8x52	8,0	32	52	1,10	2000
110-711-1066	10x65	10,0	40	66	1,75	3100



FYNS KRAN UDSTYR A/S
www.fku.dk

1-42


KÆDER & TILBEHØR / CHAINS & FITTINGS

1



Sjækler, handelssjækler type D

Leveres i galvaniseret.
Ikke godkendt til løfteopgaver.



Varenr. / Item no.	a mm	c mm	d mm
151-100-0400	10,0	19,0	5,0
151-100-0500	12,0	24,0	6,0
151-100-1000	16,0	32,0	8,0
151-100-1500	20,0	40,0	10,0
151-100-2000	22,0	44,0	11,0
151-100-2500	25,0	48,0	12,0
151-100-4000	32,0	64,0	16,0
151-100-5500	38,0	76,0	19,0
151-100-7500	44,0	85,0	22,0
151-101-0000	50,0	95,0	25,0
151-101-6000	64,0	120,0	32,0
151-101-9000	76,0	145,0	38,0


Shackles, commercial shackles type D

Galvanized.
Not approved for lifting.



Sjækler, handelssjækler type H

Leveres galvaniseret.
Ikke godkendt til løfteopgaver.



Varenr. / Item no.	a mm	c mm	d mm
151-150-0400	10,0	20,0	5,0
151-150-0500	12,0	24,0	6,0
151-150-1000	16,0	32,0	8,0
151-150-1500	20,0	40,0	10,0
151-150-2000	22,0	44,5	11,0
151-150-2500	25,0	49,0	12,0
151-150-4000	32,0	64,0	16,0
151-150-5500	38,0	80,0	19,0
151-150-7500	44,0	85,0	22,0
151-151-0000	50,0	100,0	25,0

Shackles, commercial shackles type H

Galvanized.
Not approved for lifting.




Sjækler, rustfrie

Skruepin med øje.
Ikke godkendt til løfteopgaver.

Shackles, stainless

Screw pin with eye.
Not approved for lifting.




Varenr. / Item no.	Dim. mm	Brud / Break tons/tonnes	d mm	a mm	c mm	Vægt / Weight kg
280-200-1004	M4	1,20	4,0	8	16	0,02
280-200-1005	M5	1,60	5,0	10	20	0,02
280-200-1006	M6	1,95	6,0	12	25	0,04
280-200-1008	M8	3,00	8,0	16	32	0,06
280-200-1010	M10	4,80	10,0	20	38	0,11
280-200-1012	M12	7,50	12,0	25	52	0,25
280-200-1016	M16	15,00	16,0	32	64	0,38
280-200-1020	M20	21,00	20,0	40	77	0,63

Brandmandshager, rustfrie

Ikke godkendt til løfteopgaver.

Snap hooks, stainless

Not approved for lifting.



Varenr. / Item no.	Dim. mm	L mm	C mm	Brudstyrke / Breakingload kg
280-050-1040	40x4	40	7,0	-
280-050-1050	50x5	50	7,0	80,0
280-050-1060	60x6	60	8,0	120,0
280-050-1070	70x7	70	8,0	180,0
280-050-1080	80x8	80	9,0	230,0
280-050-1100	100x10	100	11,0	350,0
280-050-1120	120x11	120	16,0	450,0
280-050-1140	140x12	140	19,0	510,0






1

Brandmandshager, galvaniseret

Ikke godkendt til løfteopgaver.

Snap hooks, galvanized

Not approved for lifting.




Varenr. / Item no.	Dim. mm	L mm	C mm	Brudstyrke / Breakingload kg
261-350-0404	40x4	40,0	7,0	60,0
261-350-0505	50x5	50,0	7,0	100,0
261-350-0606	60x5	60,0	8,0	120,0
261-350-0707	70x7	70,0	8,0	180,0
261-350-0808	80x8	80,0	9,0	230,0
261-350-0909	90x9	90,0	10,0	250,0
261-351-0010	100x10	100,0	11,0	350,0
261-351-2011	120	120,0	16,0	400,0
261-351-4012	140x12	140,0	19,0	450,0
261-351-6013	160x13	160,0	25,0	530,0

Komplet program i rustfri udførelse

Kontakt os for mere information.

Complete stainless program

Please contact us for further information.

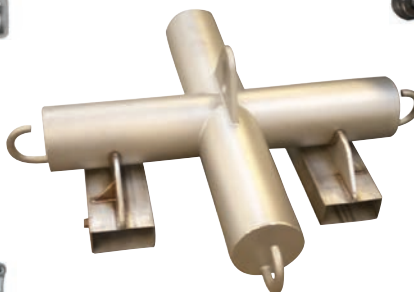



FYNS KRAN Udstyr A/S

www.fku.dk

KÆDER & TILBEHØR / CHAINS & FITTINGS

1-45

**cromox® Belastningstabel, cromox®
rustfrie kædesæt, klasse 6**

**Load table, cromox®
stainless chain sling, grade 6**

1

Dia. mm	1-strengt/ 1-legged 0°	1-strengt/ 1-legged 0°	2-strengt/ 2-legged 0° - 45°	2-strengt/ 2-legged 0° - 45°	2-strengt/ 2-legged 45° - 60°	2-strengt/ 2-legged 45° - 60°	3-strengt/ 3-legged 0° - 45°	4-strengt/ 4-legged 45° - 60°
4	0,40	0,30	0,55	0,45	0,40	0,30	0,80	0,60
5	0,63	0,50	0,85	0,70	0,63	0,50	1,30	0,90
6	0,90	0,70	1,25	1,00	0,90	0,70	1,90	1,35
7	1,25	1,00	1,75	1,40	1,25	1,00	2,65	1,85
8	1,55	1,20	2,15	1,70	1,55	1,20	3,25	2,30
10	2,45	1,95	3,45	2,70	2,45	1,95	5,15	3,65
13	3,85	3,05	5,40	4,30	3,85	3,05	8,15	5,75

**cromox® Kæder, rustfrie, cromox® CK,
klasse 6, AISI 316L**

Sikkerhedsfaktor 4:1.

**Chains, stainless, cromox® CK,
grade 6, AISI 316L**


Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons / tonnes	d mm	t mm	b ₁ min. mm	b ₂ max. mm	Vægt / Weight pr. m (kg)
112-000-0003	CK 3	0,20	3,0	14,0	5,0	12,5	0,17
112-000-0004	CK 4	0,40	4,0	12,0	5,0	13,7	0,35
112-000-0005	CK 5	0,63	5,0	15,0	6,3	18,5	0,54
112-000-0006	CK 6	0,90	6,0	18,0	7,8	22,2	0,80
112-000-0007	CK 7	1,25	7,0	21,0	9,1	25,9	1,10
112-000-0008	CK 8	1,55	8,0	24,0	10,4	29,6	1,40
112-000-0010	CK 10	2,45	10,0	30,0	13,0	37,0	2,20
112-000-0013	CK 13	3,85	13,0	39,0	16,9	48,1	3,80



ODENSE | KØBENHAVN | ESBJERG | AALBORG

+45 7015 2015 | fku@fku.dk



FYNs KRAN UDSTYR A/S
www.fku.dk

1-46

KÆDER & TILBEHØR / CHAINS & FITTINGS


1

cromox®

Ovalringe, rustfrie, cromox®

CAG, klasse 6

Sikkerhedsfaktor 4:1.



Master links, stainless, cromox®

CAG, grade 6

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	Kæde/chain 1-leg	Kæde/Chain 2-leg	d mm	t mm	b mm	Vægt / weight (kg)
124-000-0040	CAG 8	0,40	4	-	8	54	30	0,07
124-000-0063	CAG 10	0,63	5	4	10	80	50	0,15
124-000-0155	CAG 13	1,55	6/7/8	5/6	13	110	60	0,34
124-000-0245	CAG 16	2,45	10	7/8	16	110	60	0,53
124-000-0355	CAG 18	3,55	-	10	18	135	75	0,80
124-000-0600	CAG 22	6,00	13/16	13	22	160	90	1,50

cromox®

Opkorterkrøge, rustfrie, cromox®

CVE, klasse 6, AISI 318LN

Sikkerhedsfaktor 4:1.



Shorteners, stainless, cromox®

CVE, grade 6, AISI 318LN

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons/tonnes	d mm	t mm	a mm	Vægt / weight (kg)
144-100-0630	CVE 05	0,63	25	85,50	39,80	0,30
144-100-0900	CVE 06	0,90	25	92,00	40,00	0,37
144-100-1250	CVE 07	1,25	32	113,00	50,50	0,70
144-100-1550	CVE 08	1,55	32	119,80	50,50	0,77
144-100-2450	CVE 10	2,45	38	149,00	61,00	1,39



ODENSE | KØBENHAVN | ESBJERG | AALBORG


+45 7015 2015 | fku@fku.dk

**cromox®****Lastkroge, rustfrie, cromox®
CGHF, klasse 6**

Sikkerhedsfaktor 4:1.

**Clevis hooks, stainless,
cromox® CGHF, grade 6**

Safety factor 4:1.




Varenr. / Item no.	Type	WLL tons/tonnes	t mm	g mm	h mm	Vægt / weight (kg)
144-000-0630	CGHF 05	0,63	79	25	22	0,40
144-000-0900	CGHF 06	0,90	78	25	22	0,40
144-000-1250	CGHF 07	1,25	97	32	28	0,76
144-000-1550	CGHF 08	1,55	97	32	28	0,76
144-000-2450	CGHF 10	2,45	121	40	34	1,44

cromox®**Lastkroge, rustfrie,
cromox® COHF, klasse 6**

Sikkerhedsfaktor 4:1.

**Eye hooks, stainless, cro-
mox® COHF, grade 6**

Safety factor 4:1.




Varenr. / Item no.	Type	WLL tons/tonnes	t mm	g mm	b mm	h mm	Vægt / weight (kg)
144-010-0400	COHF 04	0,40	75	20	17	17	0,18
144-010-0900	COHF 05/06	0,90	100	25	25	22	0,35
144-010-1550	COHF 07/08	1,55	126	32	27	28	0,79
144-010-2450	COHF 10	2,45	160	40	37	34	1,37
144-010-3850	COHF 13	3,85	190	51	48	45	3,00

cromox®**Svirvellastkroge, rustfrie,
cromox® CWHB,
klasse 6, AISI 318LN**

Sikkerhedsfaktor 4:1.

**Swivel load hooks with
eyelet, stainless, cromox®
CWHB, grade 6, AISI 318LN**

Safety factor 4:1.



Varenr. / Item no.	Type	WLL tons / tonnes	t mm	g mm	b mm	h mm	Vægt / weight (kg)
144-070-0630	CWHB 4/5	0,63	120	20	40	16	0,65
144-070-1250	CWHB 6/7	1,25	165	25	49	21	0,98
144-070-2500	CWHB 8/10	2,50	235	40	64	33	2,71



FYNS KRAN UDSTYR A/S
www.fku.dk

1-48

KÆDER & TILBEHØR / CHAINS & FITTINGS

1


cromox®

Samleled, rustfrie, cromox® CVG, klasse 6

Sikkerhedsfaktor 4:1.

Coupling links, stainless, cromox® CVG, grade 6

Safety factor 4:1.



Varenr. / Item no.	Type	WLL tons / tonnes	t mm	b mm	d mm	Vægt / weight (kg)
132-000-0900	CVG 06	0,90	42	15	7,5	0,08
132-000-1250	CVG 07	1,25	42	15	9,5	0,09
132-000-1550	CVG 08	1,55	55	18	11,5	0,15
132-000-2450	CVG 10	2,45	90	28	18,0	0,31

cromox®

D-sjækler, rustfrie, cromox® CSA, klasse 6

Sikkerhedsfaktor 4:1.

D-shackles, stainless, cromox® CSA, grade 6

Safety factor 4:1.



Varenr. / Item no.	Type	WLL tons / tonnes	a mm	d mm	t mm	b mm	Vægt / weight (kg)
155-000-0300	CSA 04	0,30	7	6	23	12	0,035
155-000-0500	CSA 05	0,50	9	8	24	17	0,070
155-000-0750	CSA 06	0,75	11	10	35	20	0,135
155-000-1250	CSA 08	1,25	13	12	42	25	0,220
155-000-2000	CSA 10	2,00	18	16	64	32	0,510
155-000-3200	CSA 13	3,20	21	19	76	38	0,910
155-000-5000	CSA 16	5,00	19	16	64	32	0,550
155-000-7000	CSA 18	7,00	22	19	76	38	1,000
155-000-9000	CSA 20	9,00	26	22	88	44	1,900
155-001-1000	CSA 22	11,00	29	25	102	51	2,900
155-001-3000	CSA 26	13,00	32	29	114	57	3,100
155-001-5000	CSA 27	15,00	35	32	128	64	4,350
155-001-8000	CSA 28	18,00	38	35	140	70	5,300

ODENSE | KØBENHAVN | ESBJERG | AALBORG


+45 7015 2015 | fku@fku.dk

**cromox®****Sikkerheds D-sjækler,
rustfrie, cromox® CSS,
klasse 6**

Sikkerhedsfaktor 4:1.

**Safety D-shackles,
stainless, cromox® CSS,
grade 6**

Safety factor 4:1.



Varenr. / Item no.	Type	WLL tons / tonnes	a mm	d mm	t mm	b mm	Vægt / weight (kg)
155-010-0300	CSS 04	0,30	7	6	23	12	0,035
155-010-0500	CSS 05	0,50	9	8	24	17	0,070
155-010-0750	CSS 06	0,75	11	10	35	20	0,135
155-010-1250	CSS 08	1,25	13	12	42	25	0,225
155-010-2000	CSS 10	2,00	18	16	64	32	0,540
155-010-3200	CSS 13	3,20	21	19	76	38	0,945


cromox®**Pumpekæder, rustfrie,
cromox® CPK, klasse 6**

Sikkerhedsfaktor 4:1.

**Pump chains, stainless,
cromox® CPK, grade 6**

Safety factor 4:1.

Varenr. / Item no.	Type	WLL tons / tonnes	Ovalring/Masterlink mm	Kæde/Chain mm	Samleled /Joining link
På forespørgsel / On request	CPK 3	0,20	5x42x22	3x14	-
På forespørgsel / On request	CPK 4	0,40	8x54x30	4x16	5x22x9
På forespørgsel / On request	CPK 5	0,63	10x80x50	5x15	6x26x13
På forespørgsel / On request	CPK 6	0,90	13x110x60	6x18	8x35x19
På forespørgsel / On request	CPK 7	1,25	13x110x60	7x21	8x35x19
På forespørgsel / On request	CPK 8	1,55	13x110x60	8x24	10x44x25
På forespørgsel / On request	CPK 9	2,00	16x110x60	9x27	13x54x25
På forespørgsel / On request	CPK 10	2,45	16x110x60	10x30	13x54x25
På forespørgsel / On request	CPK 13	3,85	22x160x90	13x39	16x70x34
På forespørgsel / On request	CPK 16 (G5)	5,00	22x160x90	16x48	18x85x40
På forespørgsel / On request	CPK 18 (G5)	7,00	26x180x100	18x54	22x115x50

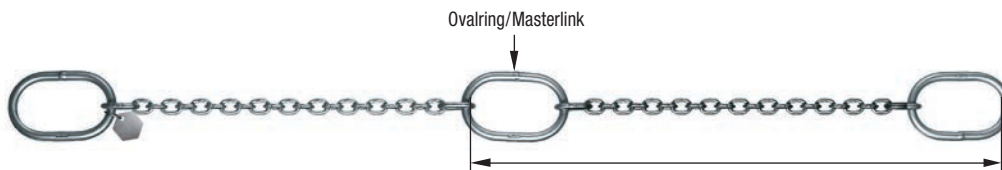

Standardlængde = 1m
Kan leveres i andre længder efter ønske.
Standard length = 1m
Available in other lengths upon request.



BEMA® , TITAN, kædelås

Kæde og lås i samlet pakke. Velegnet til entreprenørbranchen til lås af maskiner, værktøj og andet udstyr. Også velegnet til både, motorcykler og knallerter. Hængelås i 100% rustfrit stål – velegnet til brug i skrappe udendørs klimaer. Godkendt af Forsikring & Pension. Fremstillet i Sverige.

Varenr. / Item no.	Længde / Length (m)	Vægt / Weight (kg)
719-800-0010	3,5	8,6

BEMA® , TITAN, chain lock

Chain and lock in one package. Suitable for the construction industry to lock machines, tools. Also suitable for boats, motorcycles, mopeds and other equipment. Lock in 100 % stainless steel – suitable for use in harsh outdoor climates. Approved by the Danish Insurance Association (DIA). Made in Sweden.



BEMA® , TITAN, dacromet, kædelås

Kæde og lås i samlet pakke. Velegnet til entreprenørbranchen til lås af maskiner, værktøj og andet udstyr. Også velegnet til både, motorcykler og knallerter. Hængelås i 100% rustfrit stål samt kæde med anti-korrosion – ekstra velegnet til brug i skrappe udendørs klimaer. Godkendt af Forsikring & Pension. Fremstillet i Sverige.

Varenr. / Item no.	Længde / Length (m)	Vægt / Weight (kg)
719-800-0020	2,5	6,5

BEMA® , TITAN, dacromet, chain lock

Chain and lock in one package. Suitable for the construction industry to lock machines, tools and other equipment. Also suitable for boats, motorcycles, mopeds and other equipment. Lock in 100 % stainless steel and chain with anti-corrosion extra suitable for use in harsh outdoor climates. Approved by the Danish Insurance Association (DIA). Made in Sweden.

