



STÅLWIRER & TILBEHØR / STEEL WIRE ROPES & FITTINGS

**Stålwirer**

Stålwirer, standard 6x36+FC WS	2-2
Stålwirer, standard 6x36+IWRC WS	2-3
Stålwirer, kabelslåede	2-4
Stålwirer, tynde	2-4
Jernbindsel, galvaniseret	2-5
Stålwirer, tynde	2-5
Stålwirer, tynde	2-5
Stålwirer, PVC-forhuede	2-6
Elevatorwirer	2-6
CASAR Starlift rotationsfri	2-9
CASAR Eurolift rotationsfri	2-10
CASAR Alphalift	2-11
CASAR Powerplast rotationsfri	2-12
CASAR Stratoplast	2-12
CASAR Turboplast	2-12
CASAR Superplast	2-12
CASAR Turbolift	2-12
Stålwirer, rotationsfri 35 x 7	2-13
Stålwirer, rotationsfri 35 x 7 Compacted, T/S	2-14
Stålwirer, PYTHON®, rotationsfri, Compac 35 (10-48 mm)	2-15
Stålwirer, PYTHON® Super 8C	2-16
Stålwirer, rotationssvag 19 x 7	2-17
Tirfor taljer, specialwirer	2-17
Taifun / Kombinationstov + FC	2-18
Taifun / Kombinationstov + IWRC	2-18
Containerwirer, type FKU	2-25

Rustfri

Stålwirer, tynde rustfri	2-7
Stålwirer, rustfri	2-8
Stålwirer, rustfri rotationssvage	2-8
Rustfri Taifun / Kombinationstov + FC	2-19
Rustfri Taifun / Kombinationstov + IWRC	2-19
Wireløse, rustfrie	2-30
Vantskruer, rustfrie	2-33
Kovse rustfrie, polerede	2-34

Steel wire ropes

Wire ropes, standard 6x36+FC WS	2-2
Wire ropes, standard 6x36+IWRC WS	2-3
Cable laid steel wire ropes	2-4
Steel wire ropes, small	2-4
Steel wire strand, galvanized	2-5
Steel wire ropes, small	2-5
Steel wire ropes, small	2-5
Steel wire ropes, PVC-covered	2-6
Elevator ropes	2-6
CASAR Starlift non-rotating	2-9
CASAR Eurolift non-rotating	2-10
CASAR Alphalift	2-11
CASAR Powerplast non-rotating	2-12
CASAR Stratoplast	2-12
CASAR Turboplast	2-12
CASAR Superplast	2-12
CASAR Turbolift	2-12
Wire ropes, non rotating 35 x 7	2-13
Wire Ropes, non rotating 35 x 7 Compacted, T/S	2-14
Wire ropes, PYTHON®, non rotating, Compac 35 (10-48 mm)	2-15
Wire ropes, PYTHON® Super 8C	2-16
Wire ropes, rotating resistant 19 x 7	2-17
Tirfor, special wires	2-17
Combination ropes + FC	2-18
Combination ropes + IWRC	2-18
Container ropes, type FKU	2-25

Stainless

Steel wire ropes small stainless	2-7
Wire ropes, stainless steel	2-8
Wire ropes, stainless steel, rotating resistant	2-8
Stainless combination Ropes + FC	2-19
Stainless combination ropes + IWRC	2-19
Wire rope grips, stainless	2-30
Turnbuckles, stainless	2-33
Thimbles stainless, polished	2-34



STÅLWIRER & TILBEHØR / STEEL WIRE ROPES & FITTINGS

Kovse

Klemmekovse	2-33
Kovse, galvaniserede	2-34
Wirekovse, massive, Crosby	2-36
Wirekovse, massive	2-36

Blokke

Kasteblokke	2-42
Kasteblokke, YellowLine	2-42
Kasteblokke med svirveløje, Charlet	2-43
Wireskiver, type BE	2-44
Wireskiver, type BC	2-44

Wirelåse

Talurit låse og værktøj	2-27
Wirelåse	2-28
Wirelåse, E Grip, galvaniserede	2-29
Wirelåse, galvaniserede	2-29
Kilewirelåse, S03	2-35
Wiresko, åbne, S02	2-37
Wiresko, lukkede, S01	2-38
Tovpærer, Nemaq	2-39
Quick release links, Nemaq	2-39

Wirestopper

Wirestopper	2-21
Belastningstabel, wirestopper	2-22
Endeløse kvadratflettede wirestopper	2-22
Wirestopper, fladflettede	2-23
Wirestopper, kabelslæde	2-23
Grommet slings	2-24
Superloops	2-25

Wiretilbehør

Wireolie	2-26
Wirecutter	2-26
Wiresakse	2-26
Bardunstrammere, galvaniserede	2-30
Vantskruer	2-31
Vantskruer, galvaniseret	2-32
Frolår	2-40
Tractel Coni-Klam	2-40
Wirestrømper	2-41
Wirelock	2-41

Thimles

Wire rope thimble clamps	2-33
Thimbles, galvanized	2-34
Wire rope thimbles, solid, Crosby	2-36
Wire rope thimbles, solid	2-36

Blocks

Snatch blocks	2-42
Snatch blocks, YellowLine	2-42
Snatch blocks with swivel eye, Charlet	2-43
Sheaves, type BE	2-44
Sheaves, type BC	2-44

Wire rope grips

Talurit ferrules and tools	2-27
Wire rope grips	2-28
Wire rope grips, E Grip, galv.	2-29
Wire rope grips, galv.	2-29
Wedge sockets for wire rope, S03	2-35
Open spelter sockets, S02	2-37
Closed spelter sockets, S01	2-38
Rope Pear Sockets, Nemaq	2-39
Quick release links, Nemaq	2-39

Wire rope slings

Wire rope slings	2-21
Load table, wire rope slings	2-22
Square braided slings with eyes	2-22
Wire rope slings, flat braided	2-23
Wire rope slings, cable laid	2-23
Grommet wire rope slings	2-24
Superloops	2-25

Fittings

Wire oil	2-26
Wire rope cutter	2-26
Wire rope shears	2-26
Turnbuckles, galv.	2-30
Turnbuckles	2-31
Turnbuckles, galvanized	2-32
Tighten clamps for wire ropes	2-40
Tractel Coni-Klam	2-40
Cable socks	2-41
Wirelock	2-41



Fyns Kran Udstyr A/S indkøber ved godkendte leverandører, som kan efterkomme de krav vi og vore kunder stiller. Indkøbene foretages af kompetente indkøbere, som har et bredt kendskab til stålwirer og de øvrige varer som vi indkøber.

Fyns Kran Udstyr A/S har den tekniske kompetence, som sikrer en løbende kvalitetskontrol.

Fyns Kran Udstyr A/S har egne splejserier, som kan påtage sig specialopgaver og udføre montagearbejde.

For at opnå den størst mulige kundetilfredshed ved levering af vore produkter og serviceydelser, arbejder Fyns Kran Udstyr A/S efter den internationale kvalitetsstandard ISO 9001:2008.

Oplyste vægte er vejledende. Brudstyrker er garanterede min. brudstyrker. På forlangende kan Fyns Kran Udstyr A/S udstede certifikater fra alle klassificeringsbureauer.

Ikke alle dimensioner, som er omtalt i tabellerne, er lagervarer.

Ligeledes omfatter tabellerne ikke alle varianter af varer, men skulle der opstå behov uden for det heri nævnte program, beder vi Dem rette henvendelse til os.

For yderligere teknisk information se kapitel 12.

Fyns Kran Udstyr A/S purchases from approved suppliers who meet the requirements we and our customers require. The purchases are handled by qualified purchasers with their breadth of knowledge of steel wire ropes and other goods.

Fyns Kran Udstyr A/S has the technical qualifications which ensure a regular quality control.

Fyns Kran Udstyr A/S has its own riggers who undertake special tasks and carry out installation work.

In order to reach the best possible customer satisfaction on delivery of products and services Fyns Kran Udstyr A/S works according to international standards of quality ISO 9001:2008.

Weights are stated for your guidance only. Breaking loads stated are guaranteed minimum breaking loads. Upon request Fyns Kran Udstyr A/S is able to issue certificates from all classification societies.


Please note that not all dimensions mentioned in the tables are stock goods.

The tables do not comprise the entire production programme, but should the need arise outside the mentioned programme, please do not hesitate to contact us.

For further technical information please see chapter 12.

PYTHON
HIGH PERFORMANCE WIRE ROPE


CASAR



Stålwirer, standard 6x36+FC WS

Højre krydsslået

Formlagt med fiberhjerter – EN 12385.

Min. materialebrudstyrke:

Galvaniseret 200 kp/mm² = 1960 N/mm².

Wire ropes, standard 6x36+FC WS

Right regular lay

Preformed with fiber core – EN 12385.


Min. tensile strength:


Galvanized 200 kp/mm² = 1960 N/mm².



Varenr. / Item no.	Dia. mm	Hjerter / Core	Vægt / Weight kg/m	MBL	
				kN	kp
230-600-2080	8	PP	0,24	41,4	4200
230-600-2090	9	PP	0,30	52,4	5330
230-600-2100	10	PP	0,37	64,7	6580
230-600-2110	11	PP	0,44	78,3	7970
230-600-2120	12	PP	0,53	93,1	9480
230-600-2130	13	PP	0,62	109,0	11100
230-600-2140	14	PP	0,72	127,0	12900
230-600-2150	15	PP	0,83	146,0	14850
230-600-2160	16	PP	0,94	166,0	16900
230-600-2180	18	PP	1,19	210,0	21400
230-600-2201	20	PP	1,47	259,0	26400
230-600-2220	22	PP	1,78	313,0	31800
230-600-2240	24	PP	2,11	373,0	38000
230-600-2260	26	PP	2,48	437,0	44500
230-600-2280	28	PP	2,88	507,0	51650
230-600-2300	30	PP	3,30	582,0	59300
230-600-2320	32	PP	3,76	662,0	67450
230-600-2340	34	PP	4,24	748,0	76200
230-600-2360	36	PP	4,76	838,0	85400
230-600-2380	38	PP	5,30	934,0	95200
230-600-2400	40	PP	5,87	1040,0	106000
230-600-2440	44	PP	7,11	1250,0	127370

Anvendelse / Application:

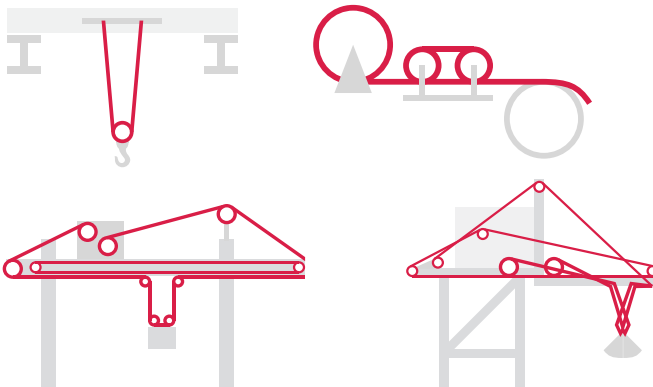



Stålwirer, standard 6x36+IWRC WS

Højre krydsslået

Formlagt med stålhjerter – EN 12385.

Min. materialebrudstyrke:

Galvaniseret 200 kp/mm² = 1960 N/mm².

Wire ropes, standard 6x36+IWRC WS

Right regular lay

Preformed with steel core – EN 12385

Min. tensile strength:


Galvanized 200 kp/mm² = 1960 N/mm².


2



Varenr. / Item no.	Dia. mm	Vægt / Weight kg/m	MBL	
			kN	kp
230-650-1080	8	0,26	44,7	4560
230-650-1090	9	0,33	56,5	5760
230-650-1100	10	0,41	69,8	7120
230-650-1110	11	0,50	84,4	8610
230-650-1120	12	0,59	100,0	10200
230-650-1130	13	0,69	118,0	12000
230-650-1140	14	0,80	137,0	14000
230-650-1150	15	0,92	157,0	16000
230-650-1160	16	1,05	179,0	18300
230-650-1180	18	1,33	226,0	23000
230-650-1200	20	1,64	279,0	28400
230-650-1220	22	1,98	338,0	34500
230-650-1240	24	2,36	402,0	41000
230-650-1260	26	2,76	472,0	48100
230-650-1280	28	3,21	547,0	55800
230-650-1300	30	3,68	628,0	64000
230-650-1320	32	4,19	715,0	72900
230-650-1340	34	4,73	807,0	82300
230-650-1360	36	5,30	904,0	92200
230-650-1380	38	5,91	1008,0	102800
230-650-1400	40	6,54	1120,0	114000
230-650-1440	44	7,92	1350,0	138000

Anvendelse / Application:

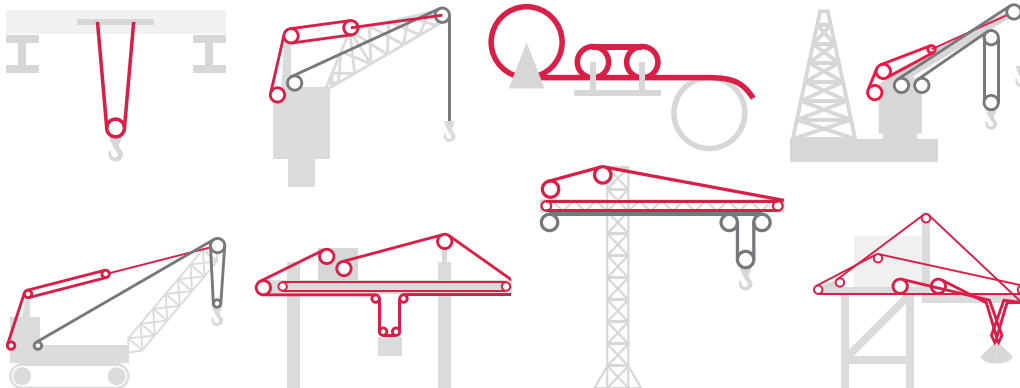



Stålwirer, kabelslåede

7 x 7 x 7, 7 x 7 x 19 Seale Ekstra fleksibel stålwire

Formlagt – Aircraft Cable-kvalitet. EN 12385.

Min. materialebrudstyrke:

200 kp/mm² = 1960 N/mm².

Cable laid steel wire ropes


7 x 7 x 7, 7 x 7 x 19 Seale Extra flexible steel wire rope

Preformed – Aircraft Cable Quality.

Min. tensile strength:

200 kp/mm² = 1960 N/mm².

Varenr. / Item no.	Dia. mm	Konstruktion / Construction	Vægt / Weight kg/m	MBL	
				kN	kp
220-200-1011	11.0	7x7x7	0,35	65,7	6700
220-200-1014	14.0	7x7x7	0,57	108,9	11100
220-200-1017	17.0	6x7x7 + 1x7x19	0,92	166,8	17000
220-250-1020	20.3	7x7x19	1,27	220,7	22500
220-250-1023	23.0	7x7x19	1,64	282,5	28800
220-250-1026	26.0	7x7x19	2,17	373,8	38100
220-250-1028	28.0	7x7x19	2,64	455,2	46400
220-250-1033	33.0	7x7x19	3,39	583,7	59500
220-250-1039	39.0	7x7x19	4,60	795,6	81100



Stålwirer, tynde

7 x 19 tør – standard stålwire

Højre krydsslået – formlagt. EN 12385.

Min. materialebrudstyrke:

Galvaniseret 200 kp/mm² = 1960 N/mm².

Steel wire ropes, small


7 x 19 dry – standard steel wire rope

Right regular lay – Preformed. EN 12385.

Min. tensile strength:

Galvanized 200 kp/mm² = 1960 N/mm².

Varenr. / Item no.	Dia. mm	Vægt / Weight kg/m	MBL	
			kN	kp
230-400-1030	3	0,034	6,39	652
230-400-1040	4	0,061	11,35	1157
230-400-1050	5	0,095	17,74	1809
230-400-1060	6	0,138	25,54	2604
230-400-1070	7	0,187	34,77	3545
230-400-1080	8	0,244	41,65	4247
230-400-1096	9.6	0,348	59,97	6116
230-400-1100	10	0,381	65,07	6636
230-400-1120	12	0,549	93,70	9555



Jernbindsel, galvaniseret

1 x 7

Min. materialebrudstyrke:

Galvaniseret 45 kp/mm² = 440 N/mm²

Steel wire strand, galvanized


1 x 7

Min. tensile strength:

Galvanized 45 kp/mm² = 440 N/mm²

Varenr. / Item no.	Dia. mm	Slåning / Lay	Vægt / Weight kg/m
200-100-1030	3	Venstre / Left	0,04

2



Stålwirer, tynde

1 x 19

Højre krydsslået – formlagt.

Min. materialebrudstyrke:

Galvaniseret 180 kp/mm² = 1770 N/mm².

Steel wire ropes, small


1 x 19

Right regular lay – preformed.

Min. tensile strength:

Galvanized 180 kp/mm² = 1770 N/mm².

Varenr. / Item no.	Dia. mm	Vægt / Weight kg/m	MBL	
			kN	kp
200-150-2013	1.3	0,010	1,37	140
200-150-2015	1.5	0,011	2,09	213
200-150-2018	1.8	0,016	3,01	306



Stålwirer, tynde

6 x 12 + 7 FC

Højre krydsslået – formlagt. EN 12385-4.

Min. materialebrudstyrke:

Galvaniseret 180 kp/mm² = 1770 N/mm².

Steel wire ropes, small


6 x 12 + 7 FC

Right regular lay – preformed. EN 12385-4.

Min. tensile strength:

Galvanized 180 kp/mm² = 1770 N/mm².

Varenr. / Item no.	Dia. mm	Stålareal / Metallic area mm ²	Vægt / Weight kg/m	MBL	
				kN	kp
230-250-1030	3	2,25	0,02	3,33	339
230-250-1040	4	3,53	0,04	5,88	599
230-250-1050	5	5,79	0,06	9,22	940
230-250-1060	6	9,07	0,09	13,34	1360
230-250-1080	8	16,90	0,15	23,63	2410




Stålwirer, PVC-forhuede

Højre krydsslået – formlagt (ikke transparent).
Min. materialebrudstyrke:
Galvaniseret 180 kp/mm² = 1770 N/mm².

Steel wire ropes, PVC-covered

Right regular lay – preformed (non transparent).
Min. tensile strength:
Galvanized 180 kp/mm² = 1770 N/mm².

Varenr. / Item no.	Dia. mm	Indvendig / Inner dim. mm	Konstruktion / Construction	Vægt / Weight kg/m	MBL	
					kN	kp
210-250-1003	3	2,0	7x7	0,02	2,3	230
210-250-1004	4	3,0	7x7	0,04	5,7	585
210-250-1005	5	2,5	7x7	0,06	3,9	403



Elevatorwirer

8 x 19 Seale

Højre krydsslået, ugalvaniseret.
Formlagt med sisalhjerter. Strækbar. EN 12385.
Ydertråde er 180 kp/mm² (1770 N/mm²) galvaniseret.
Ydertråde er 140 kp/mm² (1370 N/mm²) ugalvaniseret.
Dette ståltov er specialfremstillet som elevatorov og imødekommer kravet om at minimere differencen mellem drivskivernes og torvets Brinell-hårdhed.


Elevator ropes

8 x 19 Seale

Right regular lay, ugalvanized.
Preformed with sisal core. Dual tensile rope.
Inner wires are 180 kp/mm² (1770 N/mm²) galv.
Outer wires are 140 kp/mm² (1370 N/mm²) ungalv.
This steel wire rope is specially manufactured for elevators to meet the demand of decreasing the difference between the Brinell hardness of the traction sheaves and the rope.

Varenr. / Item no.	Dia. mm	Ydertråd / Inner wire 1770 N/mm ²	Filler 1770 N/mm ²	Ydertråde / Outer wire 1370 N/mm ²	Stålareal / Metallic area mm ²	Vægt / Weight kg/m	MBL	
							kN	kp
220-100-1008	8	0,60	0,30	0,52	22,9	0,22	28,10	2866
220-100-1010	10	0,80	0,37	0,65	35,8	0,34	44,00	4488
220-100-1011	11	0,85	0,42	0,72	44,5	0,43	53,20	5426
220-100-1012	12	0,95	0,45	0,80	53,3	0,51	63,30	6456
220-100-1013	13	1,00	0,50	0,85	61,2	0,59	74,30	7578
220-100-1014	14	1,05	0,53	0,90	68,6	0,68	86,10	8775
220-100-1015	15	1,10	0,55	0,95	75,7	0,75	98,9	10080
220-100-1016	16	1,25	0,62	1,05	94,1	0,89	113,0	11526





Stålwirer, tynde rustfri

6 x 7 +WSC

Højre krydsslået – formlagt. EN 12385.
Min. materialebrudstyrke: Ca. 160 kp/mm²
= 1570 N/mm². Trådkvalitet: AISI 316.


Steel wire ropes small stainless

6 x 7 +WSC

Right regular lay – preformed. EN 12385.
Min. tensile strength: Approx. 160 kp/mm²
= 1570 N/mm². Steel quality: AISI 316.

2

Varenr. / Item no.	Dia. mm	Stålareal / Metallic area mm ²	Vægt / Weight kg/m	MBL	
				kN	kp
230-200-1020	2	1,8	0,02	2,39	244
230-200-1030	3	4,0	0,04	5,37	548
230-200-1040	4	7,0	0,06	9,56	975
230-200-1060	6	9,0	0,14	21,48	2190
230-200-1080	8	28,2	0,25	38,24	3900
230-200-1100	10	44,0	0,39	59,72	6090



Stålwirer, tynde rustfri

6 x 19 +WSC

Højre krydsslået – formlagt. EN 12385.
Min. materialebrudstyrke: Ca. 160 kp/mm²
= 1570 N/mm². Trådkvalitet: AISI 316.


Steel wire ropes small stainless

6 x 19 +WSC

Right regular lay – preformed. EN 12385.
Min. tensile strength: Approx. 160 kp/mm²
= 1570 N/mm². Steel quality: AISI 316.

Varenr. / Item no.	Dia. mm	Vægt / Weight kg/m	MBL	
			kN	kp
230-450-1030	3	0,034	5,00	510
230-450-1040	4	0,061	8,92	910
230-450-1050	5	0,095	13,93	1420
230-450-1060	6	0,137	20,10	2050
230-450-1070	7	0,187	27,36	2790
230-450-1080	8	0,244	35,70	3640
230-450-1100	10	0,381	55,70	5680





Stålwirer, rustfri

6 x 36/WS + IWRC

Højre krydsslået – formlagt. EN 12385.

Min. materialebrudstyrke: Ca. 160 kp/mm²

= 1570 N/mm². Trådkvalitet: AISI 316.

Wire ropes, stainless steel


6 x 36/WS + IWRC

Right regular lay – Preformed.

Min. tensile strength: Approx. 160 kp/mm²

= 1570 N/mm². Steel quality: AISI 316.

Varenr. / Item no.	Dia. mm	Stålareal / Metallic area mm ²	Vægt / Weight kg/m	MBL	
				kN	kp
230-650-3120	12	65,6	0,51	80,50	8200
230-650-3140	14	89,6	0,80	109,50	11200
230-650-3160	16	123,1	1,05	143,10	14600
230-650-3180	18	148,0	1,30	181,10	18500
230-650-3220	20	182,0	1,53	223,60	22800



Stålwirer, rustfri rotationssvage

19 x 7

Højre krydsslået – formlagt. EN 12385.

Min. materialebrudstyrke: Ca. 160 kp/mm²

= 1570 N/mm². Trådkvalitet: AISI 316.

Wire ropes, stainless steel, rotating resistant

19 x 7

Right regular lay – Preformed.

Min. tensile strength: Approx. 160 kp/mm²


= 1570 N/mm². Steel quality: AISI 316.

Kan også leveres galvaniseret.

Can also be delivered galvanized.

Varenr. / Item no.	Dia. mm	Vægt / Weight kg/m	MBL	
			kN	kp
240-050-2100	10	0,40	53,71	5477
240-050-2120	12	0,58	77,61	7914
240-050-2160	16	1,03	167,00	17030





CASAR Starlift rotationsfri

Konstruktion: CASAR special, krydsslået.

Anvendelse: Byggekraner, mobilkraner,
containerkraner, elektrokraner.

CASAR Starlift non-rotating

Construction: CASAR special, regular lay.

Application: Building cranes, mobile cranes,
container cranes, electric cranes.






CASAR Starlift anvendes af en lang række førende krantfirmaer som originalwire. Den fleksible konstruktion tillader anvendelse af mindre tromler og skivediametre. Brudstyrken ligger ca. 25% over alm. rotationsfrie konstruktioner.

CASAR Starlift is used as original wire rope by many leading crane companies. The flexible construction allows the use of smaller diameter drums, sheaves and pulleys. The breaking strength lies approx. 25 % higher than that of ordinary non-rotating constructions.

Varenr. / Item no.	Dia. mm	Stålareal / Metallic area mm ²	Vægt / Weight kg/m	MBL tons / tonnes	
				180 kp/mm ²	200 kp/mm ²
250-200-1070	7	25	0,23	3,47	3,86
250-200-1080	8	33	0,30	4,53	5,03
250-200-1090	9	41	0,37	5,63	6,26
250-200-1100	10	51	0,46	7,04	7,82
250-200-1110	11	61	0,55	8,45	9,39
250-200-1120	12	74	0,66	10,16	11,29
250-200-1130	13	87	0,78	11,92	13,25
250-200-1140	14	100	0,90	13,83	15,36
250-200-1150	15	115	1,04	15,89	17,66
250-200-1160	16	132	1,18	18,11	20,12
250-200-1170	17	148	1,33	20,35	22,61
250-200-1180	18	164	1,48	22,64	25,15
250-200-1190	19	185	1,67	25,52	28,35
250-200-1200	20	205	1,85	28,24	31,38
250-200-1210	21	226	2,04	31,15	34,61
250-200-1220	22	249	2,24	34,27	38,08
250-200-1230	23	271	2,44	37,28	41,42
250-200-1240	24	296	2,66	40,73	45,26
250-200-1250	25	319	2,87	43,93	48,81
250-200-1260	26	347	3,12	47,71	53,01
250-200-1270	27	375	3,38	51,69	57,44
250-200-1280	28	405	3,65	55,81	62,01
250-200-1290	29	433	3,89	59,57	66,19
250-200-1300	30	463	4,17	63,77	70,85
250-200-1320	32	525	4,72	72,25	80,28
250-200-1340	34	525	4,72	72,25	80,28
250-200-1360	36	669	6,02	92,15	102,39
250-200-1380	38	743	6,68	102,26	113,62
250-200-1400	40	821	7,39	113,08	125,64

Anvendelse / Application:

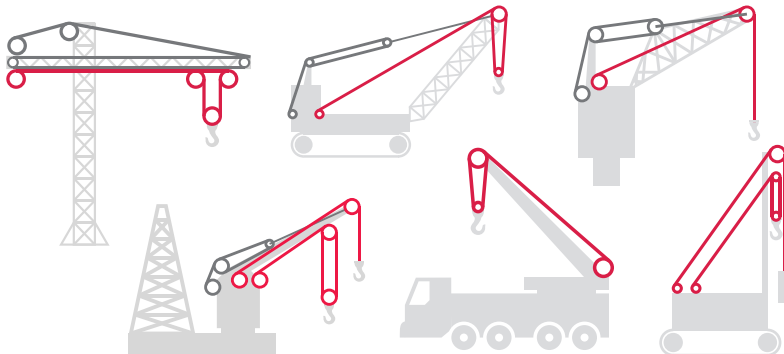




CASAR Eurolift er specielt velegnet til kraner med flerlagsspuling på tromlen, da den langsslåede konstruktion letter overgangen mellem wirelagene ved opspoling.

CASAR Eurolift is specially suitable for cranes with multi-layer drum winding. The langss lay construction ensures easier layer transfer on winching.



Anvendelse / Application:



CASAR Eurolift rotationsfri

Konstruktion: CASAR special, langsslået.

Anvendelse: Byggekraner, mobilkraner, containerkraner, elektrokrane, offshore-, skibs- og havnekrane.

CASAR Eurolift non-rotating


Construction: CASAR special, langss lay.


Application: Building cranes, mobile cranes, container cranes, electric cranes, offshore, ship and wharf cranes.

Varenr. / Item no.	Dia. mm	Stålareal / Metallic area mm ²	Vægt / Weight kg/m	MBL tons / tonnes		
				180 kp/mm ²	200 kp/mm ²	220 kp/mm ²
250-150-4100	10	56,9	0,49	8,33	9,14	9,86
250-150-4110	11	69,0	0,59	10,12	11,11	11,98
250-150-4120	12	82,0	0,71	12,10	13,30	14,16
250-150-4130	13	95,4	0,82	14,14	15,60	16,73
250-150-4140	14	110,4	0,95	16,50	18,30	19,31
250-150-4150	15	126,8	1,09	18,80	20,80	22,21
250-150-4160	16	146,2	1,26	21,29	23,50	25,20
250-150-4170	17	163,5	1,41	23,99	26,32	28,39
250-150-4180	18	186,2	1,60	27,15	30,00	32,13
250-150-4190	19	205,6	1,77	30,30	33,50	35,70
250-150-4200	20	227,5	1,96	33,49	36,90	39,64
250-150-4210	21	249,1	2,14	36,84	40,20	43,60
250-150-4220	22	276,0	2,37	40,60	45,00	47,76
250-150-4230	23	303,3	2,61	43,88	48,14	51,94
250-150-4240	24	327,1	2,81	48,30	53,50	57,08
250-150-4250	25	357,6	3,08	52,30	57,90	61,67
250-150-4260	26	382,0	3,29	56,60	62,00	66,52
250-150-4270	27	410,5	3,53	60,85	66,75	72,02
250-150-4280	28	447,3	3,85	65,60	72,70	77,47
250-150-4290	29	472,3	4,06	70,19	77,00	83,07
250-150-4300	30	505,4	4,55	75,06	82,34	88,84
250-150-4320	32	582,7	5,17	85,74	94,06	101,48

Yderligere dimensioner på forespørgsel.

Further dimensions on request.

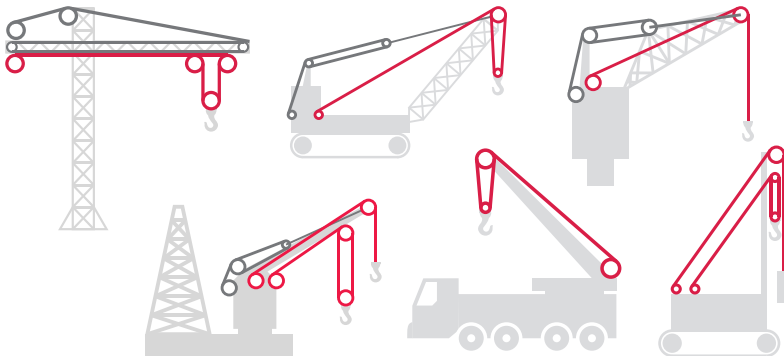



CASAR Alphaspecial

Konstruktion: CASAR special, krydsslået.

Anvendelse: Elektrotaljer, hejseværker med flere wireparter, elektriske og hydrauliske spil.

CASAR Alphaspecial

Construction: CASAR special, regular lay.

Applications: Electric hoists, multi-fall hoists, electric and hydraulic winches.

CASAR Alphaspecial er en grundigt indfedtet 8-slået wire i formlagt dobbeltkonstruktion med runde dugter. Alphaspecial er meget fleksibel med en meget høj brudstyrke og stor slidstyrke, hvilket gør den velegnet som hejsewire til elektriske taljer og hejseværker med flere wireparter, såfremt der ikke skal anvendes en rotationsfri henholdsvis en rotationssvag konstruktion på grund af stor løftehøjde eller ringe antal strenge.

CASAR Alphaspecial is an 8-stranded rope in parallel lay construction made out of conventional strands. Alphaspecial is very flexible with high breaking strength and wear resistance for electric and multi-fall hoists, provided a non-rotating or a rotation resistant construction is not specified because of high lifting height or a small number of falls.

Varenr. / Item no.	Dia. mm	Stålarreal / Metallic area mm ²	Vægt / Weight kg/m	MBL tons / tonnes		
				180 kp/mm ²	200 kp/mm ²	220 kp/mm ²
250-050-2040	4.0	8	0,07	1,19	1,32	1,46
250-050-2045	4.5	10	0,09	1,53	1,70	1,87
250-050-2050	5.0	13	0,11	1,94	2,15	2,37
250-050-2055	5.5	16	0,14	2,40	2,67	2,93
250-050-2060	6.0	19	0,17	2,89	3,22	3,54
250-050-2065	6.5	23	0,20	3,48	3,87	4,26
250-050-2070	7.0	25	0,23	3,92	4,35	4,79
250-050-2075	7.5	29	0,26	4,55	5,06	5,56
250-050-2080	8.0	33	0,29	5,05	5,61	6,17
250-050-2085	8.5	35	0,31	5,39	5,99	6,58
250-050-2090	9.0	43	0,38	6,61	7,34	8,08
250-050-2100	10.0	51	0,45	7,71	8,57	9,43
250-050-2110	11.0	62	0,55	9,45	10,49	11,54
250-050-2120	12.0	74	0,66	11,32	12,57	13,83
250-050-2130	13.0	87	0,77	13,16	14,62	16,08
250-050-2140	14.0	101	0,89	15,29	16,98	18,68
250-050-2150	15.0	118	1,05	17,87	19,86	21,84
250-050-2160	16.0	131	1,17	19,94	22,16	24,37
250-050-2170	17.0	145	1,29	22,05	24,51	26,96
250-050-2180	18.0	165	1,47	25,11	27,90	30,69
250-050-2190	19.0	188	1,67	28,55	31,72	34,89
250-050-2200	20.0	206	1,84	31,38	34,86	38,53
250-050-2210	21.0	227	2,02	34,59	38,43	42,27
250-050-2220	22.0	248	2,21	37,69	41,88	46,07
250-050-2230	23.0	268	2,38	40,70	45,22	49,75
250-050-2240	24.0	291	2,59	44,31	49,23	54,15
250-050-2250	25.0	323	2,88	49,2	54,67	60,14
250-050-2260	26.0	348	3,09	52,85	58,73	64,60
250-050-2270	27.0	373	3,32	56,67	62,97	69,27



Bemærk:


Der findes et stort antal CASAR specialkonstruktioner, rekvirér venligst CASAR-katalog på engelsk eller tysk.

Note:

Several other CASAR special constructions are available. Please contact us for CASAR catalogue in English or German.

Anvendelse / Application:






CASAR Powerplast rotationsfri

Konstruktion: CASAR special, krydsslået.
Anvendelse: Skibs- og offshorekraner og andre maritime anvendelsesområder, hvor rotationsfrie wiver er påkrævet.




CASAR Stratoplast

Konstruktion: CASAR special, kryds- eller langsslået.
Anvendelse: Mast- og bomhejsewire til mobilkraner og grave-maskiner. Hejsewire til container- og havnekrane m.v.




CASAR Turboplast

Konstruktion: CASAR special, kryds- eller langsslået, galvaniseret.
Anvendelse: Mast- og bomhejsewire til mobilkraner og grave-maskiner. Hejsewire til container og havnekrane m.v.



CASAR Superplast

Konstruktion: CASAR special, kryds- eller langsslået.
Anvendelse: Mast- og bomhejsewire til mobilkraner og grave-maskiner. Hejsewire til container- og havnekrane m.v.



CASAR Turbolift

Konstruktion: CASAR special, kryds- eller langsslået.
Anvendelse: Mast- og bomhejsewire til mobilkraner og grave-maskiner. Hejsewire til container- og havnekrane m.v.

Kontakt os for yderligere information og produktbrochure.

CASAR Powerplast non-rotating

Construction: CASAR special, regular lay.
Application: Deck and offshore cranes and other marine applications where rotation resistant ropes are required.

CASAR Stratoplast

Construction: CASAR special, regular lay or longs lay.
Applications: Mast and boom hoist rope for mobile cranes and grabs. Hoist rope for container and deck cranes etc.

CASAR Turboplast

Construction: CASAR special, regular lay or longs lay, galvanized.
Applications: Mast and boom hoist rope for mobile cranes and grabs. Hoist rope for container and deck cranes etc.

CASAR Superplast


Construction: CASAR special, regular lay or longs lay.
Applications: Mast and boom hoist rope for mobile cranes and grabs. Hoist rope for container and deck cranes, etc.

CASAR Turbolift

Construction: CASAR special, regular lay or longs lay.
Applications: Mast and boom hoist rope for mobile cranes and grabs. Hoist rope for container and deck cranes, etc.







Please contact us for further information and brochure.




**Stålwirer, rotationsfri 35 x 7**Galvaniseret. RHOL. 1960 N/mm².**Anvendelse:** Byggekraner, mobilkraner, containerkraner og elektrokraner.**Wire ropes, non rotating 35 x 7**Galvanized. 1960 N/mm².**Application:** Building cranes, mobile cranes, container cranes and electric cranes.

Varenr. / Item no.	Diameter mm	Vægt / Weight kg/mtr	MBL kN
240-100-1090	9	0,370	62,3
240-100-1100	10	0,448	76,0
240-100-1110	11	0,542	91,0
240-100-1120	12	0,645	107,0
240-100-1130	13	0,760	128,0
240-100-1140	14	0,880	148,0
240-100-1150	15	1,01	169,9
240-100-1160	16	1,15	194,0
240-100-1180	18	1,45	242,0
240-100-1190	19	1,62	277,0
240-100-1200	20	1,79	301,0
240-100-1210	21	1,98	335,0
240-100-1220	22	2,17	370,0
240-100-1240	24	2,58	441,0
240-100-1260	26	3,03	517,0
240-100-1280	28	3,51	599,0
240-100-1300	30	4,03	679,0
240-100-1320	32	4,59	769,0
240-100-1340	34	5,18	868,0
240-100-1360	36	5,81	983,0

Anvendelse / Application:



**Stålwirer, rotationsfri 35 x 7
Compacted, T/S**

Galvaniseret.


Anvendelse: Byggekraner, mobilkraner,
containerkraner, elektrokraner,
skibs- og havnekraner.**Wire Ropes, non rotating 35 x 7
Compacted, T/S**


Galvanized.

Application: Building cranes, mobile cranes,
container cranes, electric cranes,
ship and wharf cranes.

Varenr. / Item no.	Dia. mm	Vægt / Weight kg/mtr	MBL / kN 1960 N/mm ²	MBL / kN 2160 N/mm ²
240-250-1130	13	0,850	155,0	167,0
240-250-1140	14	0,986	180,0	192,0
240-250-1160	16	1,29	233,0	252,0
240-250-1180	18	1,63	300,0	321,0
240-250-1190	19	1,82	331,0	358,0
240-250-1200	20	2,01	372,0	399,0
240-250-1210	21	2,22	402,0	434,0
240-250-1220	22	2,43	444,0	484,0
240-250-1260	24	2,90	531,0	572,0
240-250-1260	26	3,40	621,0	661,0
240-250-1280	28	3,94	720,0	788,0
240-250-1300	30	4,53	827,0	904,0
240-250-1320	32	5,15	944,0	1035,0
240-250-1350	35	6,16	1125,0	1216,0
240-250-1360	36	6,52	1185,0	1286,0
240-250-1380	38	7,26	1326,0	1437,0
240-250-1400	40	8,05	1477,0	1588,0

Anvendelse / Application:

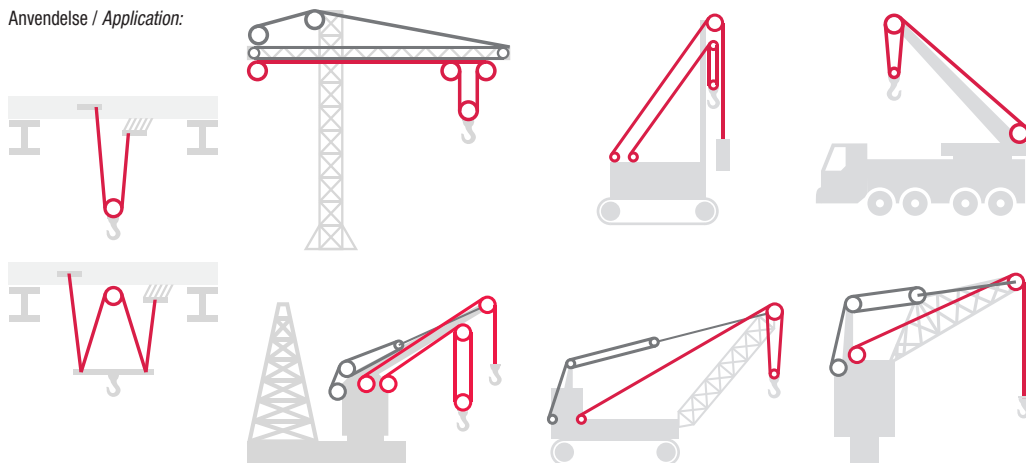

**Stålwirer, PYTHON®, rotationsfri,
Compac 35 (10-48 mm)**

Langsslået. Velegnet til flerlagsspøling.

Anvendelse: Byggekraner, mobilkraner,
containerkraner, elektrokraner,
skibs- og havnekraner.**Wire ropes, PYTHON®, non
rotating, Compac 35 (10-48 mm)**



Long lay. Suitable for multi-layer winding.

Application: Building cranes, mobile cranes,
container cranes, electric cranes,
ship and wharf cranes.

2

Varenr. (1960 N/mm ²) / Item no. (1960 N/mm ²)	Dia. mm	Vægt / Weight kg / 100 m	MBL / kN 1960 N/mm ²	MBL / kN 2160 N/mm ²
250-650-1080	8,0	30,7	56	62
250-650-1090	9,0	38,9	71	78
250-650-1100	10,0	48,0	87	96
250-650-1110	11,0	58,1	106	116
250-650-1120	12,0	69,1	126	138
250-650-1130	13,0	81,1	147	162
250-650-1140	14,0	94,1	171	188
250-650-1150	15,0	108,0	196	216
250-650-1160	16,0	122,8	223	246
250-650-1170	17,0	138,7	252	278
250-650-1180	18,0	155,5	283	311
250-650-1190	19,0	173,2	315	347
250-650-1200	20,0	195,0	338	355
250-650-1210	21,0	215,0	385	424
250-650-1220	22,0	241,0	436	480
250-650-1240	24,0	284,0	512	564
250-650-1250	25,0	312,0	563	620
250-650-1260	26,0	335,0	605	667
250-650-1280	28,0	391,0	705	777
250-650-1300	30,0	446,0	804	886

Anvendelse / Application:

**PYTHON**
HIGH PERFORMANCE WIRE ROPE




FYNS KRAN UDSTYR A/S
www.fku.dk

2-16

STÅLWIRER & TILBEHØR / STEEL WIRE ROPES & FITTINGS

2



Stålwirer, PYTHON® Super 8C

Flerskåret hejsewire.

Anvendelse: Løbekatte, portal- og skibskraner, container og havnekraner.



Wire ropes, PYTHON® Super 8C

Multi-cut hoist wire rope.


Application: Trolleys, gantry and marine cranes, ship and wharf cranes.

Varenr. (1960 N/mm ²) / Item no. (1960 N/mm ²)	Dia. mm	Vægt / Weight kg/100 m	MBL / kN 1960 N/mm ²	MBL / kN 2160 N/mm ²
250-600-1120	12	63,5	113	132
250-600-1130	13	74,0	131	153
250-600-1140	14	86,7	154	180
250-600-1150	15	98,0	176	205
250-600-1160	16	114,1	203	237
250-600-1170	17	126,79	226	263
250-600-1180	18	142,4	255	297
250-600-1190	19	157,5	282	329
250-600-1200	20	175,7	314	366
250-600-1220	22	213,2	382	445
250-600-1240	24	251,1	450	525
250-600-1260	26	293,7	527	615
250-600-1280	28	343,7	618	720
250-600-1300	30	391,5	702	818

Anvendelse / Application:




PYTHON
HIGH PERFORMANCE WIRE ROPE

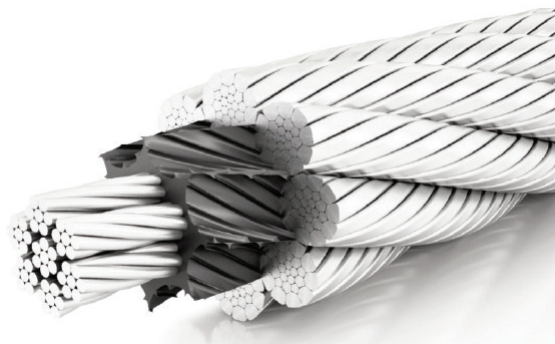

ODENSE | KØBENHAVN | ESBJERG | AALBORG

+45 7015 2015 | fku@fku.dk



Stålwirer, rotationssvag 19 x 7

Højre krydsslået – formlagt.
Min. materialebrudstyrke: Ca. 200 kp/mm²
= 1960 N/mm². Galvaniseret.


Kan også leveres i rustfri.

Wire ropes, rotating resistant 19 x 7

Right regular lay – Preformed.
Min. tensile strength: Approx. 200 kp/mm²
= 1960 N/mm². Galvanized.

Can also be delivered in stainless steel.

Varenr. / Item no.	Diameter mm	Vægt / Weight kg/m	MBL	
			kN	kp
240-050-1040	4	0,064	10,30	1050
240-050-1060	6	0,140	23,10	2356
240-050-1080	8	0,257	41,10	4191
240-050-1100	10	0,401	64,30	6557
240-050-1120	12	0,577	92,60	9443
240-050-1140	14	0,786	126,00	12849
240-050-1160	16	1,050	180,00	18356



Tirfor taljer, specialwirer


**Højre krydsslået
Formlagt med fiberhjerter**

Min. materialebrudstyrke:
Galvaniseret 200 kp/mm² = 1960 N/mm².

Tirfor, special wires


**Right regular lay
Preformed with fiber core**

Min. tensile strength:
Galvanized 200 kp/mm² = 1960 N/mm².



Varenr. / Item no.	Dia. mm	Konstruktion / Construction	Vægt / Weight kg/m	MBL	
				kN	kp
240-350-1084	8.4	4x26	0,24	50,10	5100
240-350-1092	9.2	4x26	0,33	64,90	6600
240-350-1115	11.5	4x36	0,48	81,10	8250
240-350-1163	16.3	4x36	0,98	189,30	19300





Taifun / Kombinationstov + FC

Med polypropylenhjerter

Højrekrydsslået – Formlagt.

Ståldugter oversnøret med polypropylene splitfilm.

Blå med hvidt mærkegarn i en dugt.

Min. materialebrudstyrke af tråd:

Galvaniseret 160 kp/mm² = 1570 N/mm².

Combination ropes + FC

With polypropylene core

Right regular lay – Preformed.

Steel wire strands covered with polypropylene split

film. Blue with white marking yarns in one strand.

Min. tensile strength of wire:

Galvanized 160 kp/mm² = 1570 N/mm².

Varenr. / Item no.	Dia. mm	Stålareal / Metallic area mm ²	Konstruktion / Construction	Vægt / Weight kg/m	MBL kp
200-200-1010	10	7,1	6x6x0,50	0,11	2100
200-250-1012	12	13,0	6x6x0,55	0,16	2900
200-300-1014	14	13,6	6x8x0,60	0,21	3600
200-300-1016	16	18,5	6x8x0,70	0,27	4500
200-300-1018	18	24,1	6x8x0,80	0,35	5500
200-300-1020	20	24,1	6x8x0,80	0,35	5500
200-300-1022	22	30,5	6x8x0,90	0,44	6900
200-300-1024	24	45,6	6x8x1,10	0,59	9700
200-300-1028	28	54,3	6x8x1,20	0,68	11000



Taifun / Kombinationstov + IWRC

Med stålhjerter

Højrekrydsslået – formlagt.

Ståldugter oversnøret med polypropylene splitfilm.

Blå med hvidt mærkegarn i en dugt.

Min. materialebrudstyrke af tråd:

Galvaniseret 160 kp/mm² = 1570 N/mm².

Combination ropes + IWRC

With steel core

Right regular lay -Preformed.


Steel wire strands covered with polypropylene split

film. Blue with white marking yarns in one strand.

Min. tensile strength of wire:

Galvanized 160 kp/mm² = 1570 N/mm².

Varenr. / Item no.	Dia. mm	Stålareal / Metallic area mm ²	Konstruktion / Construction	Vægt / Weight kg/m	MBL kp
200-200-2008	8	7,9	6x5x0,40	0,09	1600
200-200-2010	10	13,0	6x6x0,50	0,15	2600
200-250-2012	12	18,2	6x7x0,55	0,22	3600
200-300-2014	14	23,8	6x8x0,60	0,28	4650
200-300-2016	16	32,4	6x8x0,70	0,37	6200
200-300-2018	18	40,3	6x8x0,80	0,46	7400
200-300-2020	20	51,6	6x8x0,90	0,58	9700
200-300-2022	22	79,2	6x8x1,10	0,84	14200
200-300-2024	24	97,0	6x8x1,20	1,01	17000
200-300-2026	26	112,0	6x8x1,30	1,18	18900
200-300-2028	28	129,0	6x8x1,40	1,35	21600
200-300-2030	30	152,0	6x8x1,50	1,58	24900
200-300-2032	32	180,0	6x8x1,60	1,84	28900



Rustfri Taifun / Kombinationstov + FC

Højre krydsslået – formlagt

Rustfri ståldugter oversnøret med PP splitfilm.
Blå med rød mærkegarn i én dugt.
Min. materialebrudstyrke af tråd:
Ca. $170 \text{ kp/mm}^2 = 1670 \text{ N/mm}^2$.

Stainless combination Ropes + FC

Right regular lay – preformed

Stainless steel wire strands covered with PP split film.
Blue with red marking yarns in one strand.
Min. tensile strength of wire:
Approx. $170 \text{ kp/mm}^2 = 1670 \text{ N/mm}^2$.

2

Varenr. / Item no.	Dia. mm	Stålareal / Metallic area mm ²	Vægt / Weight kg/m	MBL kp
200-200-1910	10	7,1	0,11	2150
200-300-1914	14	13,6	0,21	3700

De angivene dimensioner er vejledende.

Dimensions stated for information only.



Rustfri Taifun / Kombinationstov + IWRC

Højre krydsslået – formlagt

Rustfri ståldugter oversnøret med PP splitfilm.
Blå med rødt mærkegarn i én dugt.
Min. materialebrudstyrke af tråd:
Ca. $170 \text{ kp/mm}^2 = 1670 \text{ N/mm}^2$.

Stainless combination ropes + IWRC

Right regular lay – preformed


Stainless steel wire strands covered with PP split film.
Blue with red marking yarns in one strand.
Min. tensile strength of wire:
Approx. $170 \text{ kp/mm}^2 = 1670 \text{ N/mm}^2$.

Varenr. / Item no.	Dia. mm	Stålareal / Metallic area mm ²	Vægt / Weight kg/m	MBL kp
200-200-2910	10	16,9	0,15	2600
200-250-2912	12	15,8	0,19	3000
200-300-2914	14	23,8	0,28	4800

De angivene dimensioner er vejledende.

Dimensions stated for information only.





Kundetilpassede løsninger fra Fyns Kran Udstyr A/S

Fyns Kran Udstyr har landets største riggerværksted, hvorfra vi producerer kundetilpassede løsninger til både danske og udenlandske kunder.

På det 650 kvadratmeter store riggerværksted i Odense har vi kompetente og erfarne fagfolk, som dagligt løser kundespecifikke opgaver inden for:

- Kædesæt – med mange forskellige dimensioner og udførelser.
- Wirestopper og wiresæt - i forskellige størrelser og udførelser, flettet wire mm.
- Tovværk til diverse opgaver.
- Test og reparationer af løfteudstyr.
- Graving/afmærkning af løftegrej.



Wirestopper fremstilles med originale taluritlåse på originale taluritpressere. Den største hydrauliske presse er på 1.500 tons og kan klare wiredimensioner op til 50 mm.



På værkstedet foretager vi ligeledes reparation af løftegrej, herunder donkrafte, pladekløer, spil, taljer m.m.

Customized solutions from Fyns Kran Udstyr A/S

Fyns Kran Udstyr has the country's largest rigging workshop, where we produce customized solutions for both Danish and foreign customers.


In our 650 square meter rigging workshop in Odense, we have competent and experienced professionals, working to solve customized tasks such as:

- Chain sets – in many different sizes and versions.
- Wire rope slings – in different sizes and designs, braided wire etc.
- Ropes for various tasks.
- Testing and repair of lifting equipment.
- Engraving/ marking of lifting gear.

Wire rope slings are manufactured with original Talurit ferules and manufactured on original Talurit hydraulic press machines. The maximum hydraulic pressure is 1500 tonnes which can handle wire dimensions up to 50 millimeters.

At our workshop, we also carry out repairs of lifting equipment, including jacks, lifting clamps, winches and hoists etc.



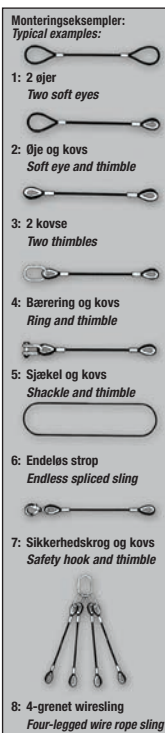

Wirestropper

Wirestropper med fiberhjerter splejses med aluminiumsbøsninger. Kan efter ønske leveres håndsplejede. Ved bestilling opgives længden = L. Alle specielle stropper udføres efter opgave.

Referencenorm: DS/EN 13414-1.

Wire rope slings

Wire rope slings with fiber core are spliced with aluminium sleeves. Hand-spliced slings can be supplied on request. When ordering, please state length = L. All special slings according to specification.

Reference Norm: DS/EN 13414-1.



Belastning:

WLL i kp (sikkerhedsfaktor 5:1)

Arbejdstilsynet foreskriver:

Ved ulige belastning skal følgende iagttages:

- 2-strengede sling beregnes som tilsvarende 1-strengede.
- 3- og 4-strengede sling beregnes som tilsvarende 2-strengede.

Det er i den forbindelse Arbejdstilsynets synspunkt, at en belastning vil være ulige, med mindre det kan dokumenteres, at den er lige/symmetrisk fordelt.

Loading:

WLL in kp (safety factor 5:1)

The Danish National Labour Inspection stipulates:
On uneven loading the following shall be observed:

- Two-legged slings shall be considered the equivalent of one legged sling.
- Three and four-legged slings shall be considered the equivalent of two-legged slings.

It is the view of the Danish National Labour Inspection that a load is uneven unless it can be documented as being evenly/symmetrically distributed.

Bemærk: Konstruktionen 6 x 36 WA/SE galv., min. brudstyrke 200 kp/mm² (1960). På vores riggerværksteder udføres splejsninger med dobbelt lås, istøbning af tovpære, tilspidsning, tackling m.m. efter bestilling.

Note: The construction 6 x 36 WA/SE galv., min. breaking strength 200 kp/mm² (1960). Double-lock splicing socketing, tapering, tackle fitting, etc. is supplied on request from our rigging shop.





Belastningstabel, wirestopper

Load table, wire rope slings

1-strengt / 1-legged							2-strengt / 2-legged				3+4-strengt / 3+4-legged				Øjestr. / Eye size cm
Anhugningsmåde / Application EN13414-1															
Lastfaktor / Load Factor	1,0	2,0	0,8				1,4	1,0			2,1	1,5			
Wiredia. / Wire dia. mm	WLL i tons / in tonnes*														
Materiale / Material - 6x36+	FC	IWRC	FC	IWRC	FC	IWRC	FC	IWRC	FC	IWRC	FC	IWRC	FC	IWRC	
8	0,76	0,82	1,52	1,64	0,60	0,66	1,00	1,15	0,76	0,82	1,60	1,72	1,15	1,23	15
10	1,15	1,28	2,30	2,56	0,92	1,02	1,60	1,79	1,15	1,28	2,40	2,69	1,70	1,92	15
12	1,70	1,85	3,40	3,67	1,36	1,47	2,40	2,57	1,70	1,84	3,55	3,85	2,55	2,75	20
14	2,30	2,52	4,60	5,04	1,84	2,01	3,20	3,52	2,30	2,52	4,85	5,29	3,45	3,78	25
16	3,00	3,30	6,00	6,59	2,40	2,64	4,20	4,61	3,00	3,30	6,30	6,92	4,50	4,94	25
18	3,85	4,14	7,70	8,28	3,08	3,31	5,40	5,80	3,85	4,14	8,10	8,70	5,75	6,21	30
20	4,75	5,11	9,50	10,22	3,80	4,09	6,65	7,15	4,75	5,11	10,00	10,73	7,15	7,67	30
22	5,70	6,21	11,40	12,42	4,56	4,97	7,98	8,69	5,70	6,21	12,00	13,04	8,55	9,32	35
24	6,80	7,38	13,60	14,76	5,44	5,90	9,50	10,33	6,80	7,38	14,25	15,50	10,20	11,07	35
26	8,00	8,66	16,00	17,32	6,40	6,93	11,20	12,12	8,00	8,66	16,80	18,19	12,00	12,99	35
28	9,30	10,04	18,60	20,09	7,44	8,04	13,00	14,06	9,30	10,04	19,50	21,09	13,95	15,06	35
30	10,65	11,52	21,30	23,04	8,52	9,22	14,90	16,13	10,65	11,52	22,35	24,19	16,00	17,28	50
32	12,10	13,12	24,20	26,24	9,68	10,50	16,95	18,37	12,10	13,12	25,40	27,55	18,15	19,68	50
34	13,70	14,82	27,40	29,63	10,96	11,85	19,18	20,74	13,70	14,81	28,77	31,11	20,55	22,22	50
36	15,40	16,60	30,80	33,19	12,32	13,28	21,55	23,23	15,40	16,60	32,35	34,85	23,10	24,89	50
38	17,13	18,50	34,26	37,01	13,70	14,80	23,98	25,90	17,13	18,50	35,97	38,86	25,70	27,75	50
40	19,05	20,52	38,10	41,04	15,24	16,42	26,65	28,73	19,05	20,52	40,00	43,09	28,60	30,78	50

*WLL er beregnet på 6x36+FC og 6x36+IWRC, 1960 N/mm² med taluritsplejste øjer / WLL is calculated for 6x36+FC and 6x36+IWRC in grade 1960 with ferrule-secured eye terminations.

WLL kan forøges ved anvendelse af bedre trådkvalitet / WLL can be increased by using a higher tensile strength.

FC = Fiberhjerter / Fiber Core.

IWRC = Hjerte af selvstændigt stålwir / Independent Wire Rope Core.

Endeløse kvadrattflettede wirestopper

Square braided slings with eyes


Flettet med øjer der takles. Ved ordre opgives målene L + lg.
Meget fleksible.

When ordering please state the measures L + lg.
Very flexible.



Varenr. / Item no.	Dia. mm	Stålwir / Steel Wire mm	Konstruktion / Construction kp	MBL 200 kp/mm ²	WLL kp
291-220-0045	45	11	7x7x7	44200	8800
291-220-0058	58	14	7x7x7	72100	14400
291-220-0075	75	17	6x7x7+1x7x19	114000	22800
291-220-0088	88	20	7x7x19	150000	30000
291-220-0103	103	23	7x7x19	192000	38400
291-220-0113	113	26	7x7x19	242000	48400
291-220-0125	125	28	7x7x19	292000	58500
291-220-0144	144	33	7x7x19	400000	80000
291-220-0175	175	39	7x7x19	545000	109000

MAKS. LÆNGDE - 14,0 METER.
MAX. LENGTH - 14,0 METERS.

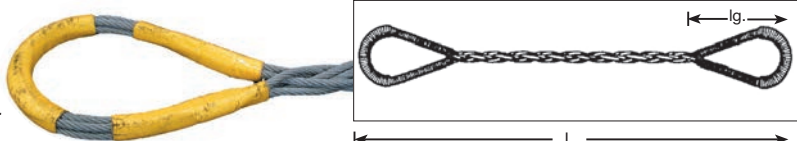

**Wirestropper, fladflettede****10-part fladflettede**

Leveres i enhver ønsket længde med eller uden kovser.

Min. matr. brudstyrke $220 \text{ kp/mm}^2 = 2160 \text{ N/mm}^2$.

Sikkerhedsfaktor 5:1.

Wire rope slings, flat braided**10-part Flat Braided**

Lengths at request with or without thimbles.

Min. tensile strength $220 \text{ kp/mm}^2 = 2160 \text{ N/mm}^2$.

Safety factor 5:1.

Varenr. / Item no.	Stropbredde / Sling width mm	Stroptykkelse / Sling thickness mm	MBL kg	WLL kg	Std. øjestr. / Std. eye size mm
291-160-1095	20	7	5000	1000	150
291-160-1180	27	11	10000	2000	200
291-160-1250	32	12	13000	2600	300
291-160-1350	36	15	17500	3500	300
291-160-1480	45	16	24000	4800	300
291-140-0058	70	22	29000	5800	500

**Wirestropper, kabelslåede****Meget fleksible**

Stropperne er meget mere smidige end konventionelle wirestropper.

Lavere egenvægt.

Ideelle til svære løfteopgaver.

Sikkerhedsfaktor 5:1.

Wire rope slings, cable laid**Very flexible**

These slings are much softer than conventional slings.

Low weight.

Ideal for heavy lifting purposes.

Safety factor 5:1.

Varenr. / Item no.	Strop dia. / Sling dia. mm	Konstruktion / Construction	MBL 200 kp/mm ²	WLL kp	Std. øjestr. / Std. eye size mm
290-940-0014	14	7 x 7 x 7	11100	2000	250
290-940-0017	17	6x7x7 + 1x7x19	17000	3060	300
290-940-0020	20	7 x 7 x 19	22500	4050	500
290-940-0023	23	7 x 7 x 19	28800	5185	500
290-940-0026	26	7 x 7 x 19	38100	6860	500
290-940-0028	28	7 x 7 x 19	46400	8350	500
290-940-0033	33	7 x 7 x 19	59500	10710	500
290-940-0039	39	7 x 7 x 19	81100	14600	500



Grommet slings

Grommet slings fremstilles endeløse af kabelslået wire eller 6 x 36 WA/SE og kan leveres med øje eller kovs efter ønske.

Grommet slings udmærker sig ved at være lettere end håndsplejede stropper. De er lette at anvende, da de ikke snor sig ved vertikale løft. Modsat stropper med håndsplejede øjer, som kun løfter i en part, arbejder en grommet slings med to (eller flere) parter.

Grommet slings fremstilles maskinelt, og selv meget kraftige og lange stropper kan fremstilles i nøjagtige længder.

Brug ikke grommet slings ved D/d forhold < 2.

Grommet wire rope slings

Grommet slings are endless, made of cable-laid wire ropes, 6 x 36 WA/SE and are available with eyes or thimbles on request.

Grommet slings are lighter than hand-spliced slings. They are easier to use as they do not curl when used for vertical lift. In contrast to slings with hand-spliced eyes where the load is carried only by one part, a Grommet sling lifts with double part (or more).

Grommet slings are machine made and even very strong and long slings can be produced in accurate lengths.

Do not use Grommet slings with D/d ratio < 2.

Varenr. / Item no.	Strop dia. / Sling dia. mm	Mindste omkreds/ Minimum circumference	Konstruktion / Construction	MBL	WLL	Vægt / Weight kg/m	Sikkerhedsfaktor/ Safety Factor
				1960 N/mm ²	tons/tonnes		
På forespørgsel / On request	30	1,05	7 x 6 x 36 WS - CW	76,84	15,36	3,07	5
På forespørgsel / On request	33	1,16	7 x 6 x 36 WS - CW	92,98	18,59	3,71	5
På forespørgsel / On request	36	1,26	7 x 6 x 36 WS - CW	110,66	22,13	4,41	5
På forespørgsel / On request	39	1,37	7 x 6 x 36 WS - CW	129,87	25,97	5,18	5
På forespørgsel / On request	42	1,47	7 x 6 x 36 WS - CW	150,61	30,12	6,01	5
På forespørgsel / On request	45	1,58	7 x 6 x 36 WS - CW	172,90	34,58	6,90	5
På forespørgsel / On request	48	1,68	7 x 6 x 36 WS - CW	196,72	39,34	7,85	5
På forespørgsel / On request	54	1,89	7 x 6 x 36 WS - CW	248,97	49,79	9,93	5
På forespørgsel / On request	60	2,10	7 x 6 x 36 WS - CW	307,38	61,47	12,27	5
På forespørgsel / On request	66	2,31	7 x 6 x 36 WS - CW	371,92	76,24	14,84	4,878
På forespørgsel / On request	72	2,52	7 x 6 x 36 WS - CW	442,62	93,26	17,66	4,746
På forespørgsel / On request	78	2,73	7 x 6 x 36 WS - CW	519,46	112,58	20,73	4,614
På forespørgsel / On request	84	2,94	7 x 6 x 36 WS - CW	602,46	134,41	24,05	4,482
På forespørgsel / On request	90	3,15	7 x 6 x 36 WS - CW	691,59	158,98	27,60	4,350
På forespørgsel / On request	96	3,36	7 x 6 x 36 WS - CW	786,88	186,55	31,41	4,218
På forespørgsel / On request	102	3,57	7 x 6 x 36 WS - CW	888,31	217,40	35,46	4,086
På forespørgsel / On request	108	3,78	7 x 6 x 36 WS - CW	995,90	251,87	39,75	3,954
På forespørgsel / On request	114	3,99	7 x 6 x 36 WS - CW	1.109,63	290,32	44,29	3,822
På forespørgsel / On request	120	4,20	7 x 6 x 36 WS - CW	1.229,50	333,19	49,08	3,690
På forespørgsel / On request	126	4,41	7 x 6 x 36 WS - CW	1.355,53	380,98	54,11	3,558
På forespørgsel / On request	132	4,62	7 x 6 x 36 WS - CW	1.487,70	434,23	59,39	3,426
På forespørgsel / On request	138	4,83	7 x 6 x 36 WS - CW	1.626,02	493,63	64,90	3,294
På forespørgsel / On request	144	5,04	7 x 6 x 36 WS - CW	1.770,48	559,92	70,68	3,162
På forespørgsel / On request	150	5,25	7 x 6 x 36 WS - CW	1.921,10	634,02	76,69	3,030



1. Formlagt ståltov
2. Ståltovet delt
3. Lukning begyndt
4. Lukning halvt afsluttet
5. Lukning afsluttet
6. Superloop-bøsning presset på. Herved opnås en samling, der er 100% effektiv
7. Superloop med kovs

Superloops

Superloop eller flamsk øje er en moderne afslutning, som omfatter en stållås, der lukkes over det flamske øjes ender.

Uden låsen har det flamske øje allerede en effektivitet på 75% af wirens brudstyrke, med wirelåsen har denne afslutning den samme brudstyrke som wirens. For svære dimensioner dog ned til 90% af wirens brudstyrke. Superloop med flamsk øje kan bruges på wirer med en diameter op til 114 mm.


På vort værksted kan fremstilles Superloop med en diameter på op til 68 mm.

Superloops

Superloop or Flemish eye is a modern termination. It comprises a steel sleeve closed over the tails of a Flemish eye.

The Flemish eye without the sleeves has already an efficiency of 75% of the breaking load of the rope; with the sleeve this termination has the same breaking load as the rope, for thick ropes down to 90% of the rope's breaking load. Superloop with Flemish eye can be used on ropes up to 114 mm in diameter. At our workshop we can make Superloop with a diameter up to 68 mm.

1. Preforms Steel Wire Rope
2. Split up Steel Wire Rope
3. Closing begun
4. Closing half finished
5. Closing finished.
6. Superloop sleeve pressed on. By this you obtain an assembly which is 100% effective
7. Superloop with thimble

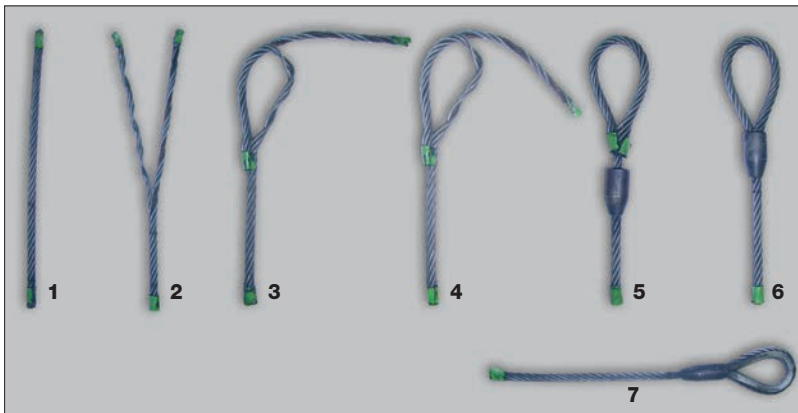

Containerwirer, type FKU

6 x 36 + IWRC galvaniseret med rundkovs i kraftig udførsel.

Varenr. / Item no.	Dia. mm	Længde / Length m	MBL kp
290-700-5100	16	10,0	16.500
290-700-5110	16	11,0	16.500
290-700-5120	16	12,0	16.500

Andre længder og dimensioner på forespørgsel.

Container ropes, type FKU

6 x 36 + IWRC galvanized with heavy duty thimbles.

Other lengths and sizes available on request.





Wirecutter

Type Iron Grip II

Let og hurtigt at betjene. Knivene er fremstillet af specialhærdet stål.

Varenr. / Item no.	Max. wiredia. / wire dia. mm	Bredde / Width mm	Højde / Height mm	Vægt / Weight kg
269-100-0030	28	129	175	5

Wire rope cutter

Type Iron Grip II

Easy and fast to operate. Blades of special hardened steel.



C-7

Wiresakse

Type Felco

Wiresaksen for den professionelle bruger.



C-9



C-12



C-16

Wire rope shears

Type Felco

Rope shears for professionals.

Varenr. / Item no.	Type	Max. wiredia. / wire dia. mm	Længde / Length mm
269-100-0070	C7	7	190
269-100-0080	C9	9	325
269-100-0090	C12	12	500
269-100-0100	C16	16	590

Wireolie

Reducerer slid og forøger wirens levetid. En afgørende forudsætning for forøgelse af en wires levetid er regelmæssig og omhyggelig vedligeholdelse. Wireolien er, i samarbejde med Texaco, udviklet specielt til eftersmøring af stålwire og opfylder derfor de specielle krav til smøreevne, der stilles ved eftersmøring. Wireolien er en tynd letflydende smøroleie, som trænger helt ind i wiren og beskytter mod såvel indvendigt som udvendigt slid.

Wireolien efterlader på grund af dens gode indtrængningsevne mindre fedt på wirens overflade og forurener derfor mindre. Kan med fordel påføres som spray og med pensel. Wireolien opløser gammelt fedt, fortrænger vand, opløser rust og hindrer yderligere rustdannelse. Wireolien indeholder ingen opløsningsmidler og er ikke mærkningspligtig.



Wire oil

Reduces wear and increases the life of the wire. A decisive condition to increase the life of a wire is regular and careful maintenance. The wire oil is developed in co-operation with Texaco for relubrication of steel wires and comply with the special demands on the relubrication of steel wires. The wire oil is a thin fluid lubricating oil which penetrates completely into the wire and protects against inside and outer wear.

Due to the eminent penetration the wire oil leaves only little grease on the wire and therefore it reduces the pollution. The Wire oil can be used as a spray or applied with a brush. The wire oil dissolves old grease.

The wire oil displaces water, dissolves corrosion and hinders further rusting. The wire oil contains no solvents and is not under obligation to be marked.

Varenr. / Item no.	Type	Embalage / Packing
268-500-2001	1.00 l dunk / jar	Plastdunk / Plastic Jar
268-500-2004	4.00 l dunk / jar	Plastdunk / Plastic Jar
268-500-2010	10.0 l dunk / jar	Plastdunk / Plastic Jar
268-500-2050	50.0 l tønde / drum	Ståltønde / Steel Drum
268-500-2200	200 l tønde / drum	Ståltønde / Steel Drum



Talurit låse og værktøj

Til splejsning af stålwire tilbydes et bredt program af taluritlåse samt værktøjer til presning af disse.

A: T-låsen er den oprindelige aluminiumslås. T-låsen fås i størrelser svarende til en wirediameter fra 1 til 130 mm.

B: ULTRAGRIP-låsen, type UM er cylindrisk. Grundet det specielle design har den en mindre udvendig diameter efter presning (DAP) end T-låsen. UM-låsen fås i størrelser svarende til en wirediameter fra 9 til 115 mm.

C: TKH-låsen er en videreudvikling af T-låsen, tilføjet en konisk ende. Desuden har TKH-låsen et hul, som gør det muligt at se enden af wren ikke kun før, men også efter presningen. Velegnet til wirediameter fra 7 til 63 mm.

D: TCU-låsen er i de fleste tilfælde det rigtig valg til brug i kombination med stålwire i rustfrit stål eller kobber. Fås i størrelser svarende til en wirediameter fra 1 til 32 mm.

E: Udvalget i taluritlåse omfatter også typer af carbon, kobber og rustfrit stål. INOX-låsene til rustfri stålwire fås i størrelser svarende til en wirediameter fra 1 til 30 mm.

Ovennævnte låse samt de tilsvarende værktøjer til presning er kun et udsnit af det brede taluritprogram. talurit tilbyder alt fra håndværktøj til hydrauliske pressemaskiner samt mange forskellige typer maskiner til klipning af stålwire (enten manuelt, betjente eller fuldautomatiske). Kort sagt, alt hvad der kan være behov for i en virksomhed, der arbejder med stålwire. Fyns Kran Udstyr A/S er autoriseret forhandler af produkter af varemærket talurit.

Kontakt venligst en af vore afdelinger eller konsulenter for yderligere information.

Se også www.talurit.com for yderligere information.

Talurit ferrules and tools

For splicing of steel wire ropes is offered a wide programme of Ferrules and Tools from the TALURIT brand.

A: The T-ferrule is the original splicing ferrule in aluminium. The T-ferrules are available in dimensions corresponding to wire rope diameters from 1 to 130 mm.

B: The ULTRAGRIP ferrule, type UM, is of a cylindrical type. Thanks to the special design it is allowing for a smaller outer diameter after pressing (DAP) compared with the T ferrule. Available in dimensions corresponding to wire rope diameters from 9 to 115 mm.

C: The TKH-ferrule type is a further development of the T ferrule, adding a conical end. In addition there is a built-in feature with an inspection hole, giving the possibility to see the wire rope end not only before pressing but also after. Suitable for use together with wire ropes in the diameters from 7 to 63 mm.

D: To be used in combination with wire ropes in stainless steel or copper, the TCU-ferrules are most cases the correct choice. Found in sizes suitable to wire rope diameters ranging from 1 to 32 mm.

E: The range of ferrules of TALURIT brand also incorporate types of carbon as well as copper & stainless steel material. Serving as an example for the steel ferrule types, for stainless steel wire ropes in diameters from 1 to 30 mm, the INOX-ferrules are available.

The above-mentioned ferrules as well as the corresponding tools to press these, this is just a selection from the wide TALURIT product program. Ranging from hand tools through hydraulic press machines in various sizes, the many types of wire rope cutting machines, found as manually operated or fully automatic, are adding up to what can possibly be needed in a production site where wire rope fabrication is the core business. Fyns Kran Udstyr A/S are the contracted retailer of the TALURIT branded products.

Please contact one of our departments or consultants for further information.

See also www.talurit.com for further information.



A



B



C



D



E



30-ton



1000-ton



AV40






Wirelåse

Type IronGrip BG-100

Wire rope grips

Type IronGrip BG-100



IronGrip wirelåse er testet i henhold til EN 13411-3.

IronGrip – skader ikke ståltovet.

IronGrip – er let at montere.

IronGrip – giver garanteret styrke.

IronGrip-wirelåsen skal altid efterspændes efter første træk og derefter med jævne mellemrum.

Konstruktionen og styrken hos IronGrip betyder:

- Mindre antal låse for en sikker konstruktion.
- Mindre monteringsarbejde og kortere ståltov.
- Mindre antal wirelåse på lager, da hver type dækker over flere dimensioner.
- Ingen risiko for fejlbetjening.
- Samme styrke efter mange ommonteringer.

NB! Virkningsgrad minimum 90% af wirens MBL.

IronGrip rope grips are tested according to EN 13411-3.

IronGrip – will not damage the steel wire rope.

IronGrip – easy to fit.

IronGrip – guaranteed strength.

IronGrip must be retightened after initial use and then at regular intervals.

The construction and the strength of IronGrip means:

- Fewer grips for a safe construction.
- Less fitting and shorter steel wire rope.
- Smaller stocks of grips as each type covers several rope sizes.
- No risk of incorrect fitting.
- Same strength after being used many times.

NB! Efficiency minimum 90 % of the wire MBL...

Varenr. / Item no.	Wiredia. / Wire dia. mm	Antal pr. øje / Number per eye	Vægt / Weight kg
260-050-1006	5-6	2	0,09
260-050-1008	7-8	2	0,12
260-050-1010	9-10	2	0,20
260-050-1012	11-12,5	2	0,39
260-050-1016	13-16	2	0,72
260-050-1020	17-20	2	1,20
260-050-1025	21-25	2	2,80
260-050-1035	26-34	2	7,70



Wirelåse


Type IronGrip BG-S

Den ideelle wirelås for små wirer indtil 6 mm i diameter. Wirelåsen har fastsvejsede skruer.

Der behøves kun ét værktøj ved montering.

Holder til wirens brudstyrke. Er meget let at montere.

Optager kun lidt plads og yder fuld sikkerhed.

NB! Ikke godkendt til løft.

Wire rope grips

Type IronGrip BG-S

The ideal grip for small wire ropes up to a diameter of 6 mm. The grip has welded-in screws. Only one tool is needed for fitting. Withstands the breaking load of the wire rope. Very easy to fit. Takes up little space and guarantees complete safety.

NB! Not approved for lifting purposes.

Varenr. / Item no.	Type	Materiale / Material	Wiredia. / Wire dia. mm	Vægt / Weight g
260-050-2003	S3	Elektrocoating	3	17
260-050-2004	S4	Elektrocoating	4	24
260-050-2005	S5	Elektrocoating	5	46
260-050-2006	S6	Elektrocoating	6	61
260-050-3003	S3SS	Rustfri / Stainless*	3	17
260-050-3004	S4SS	Rustfri / Stainless*	4	24
260-050-3005	S5SS	Rustfri / Stainless*	5	46
260-050-3006	S6SS	Rustfri / Stainless*	6	61

*AISI 316.

**Wirelåse, E Grip, galvaniserede**

E Grip-wirelåse er godkendt til løfteopgaver.
Ved en wireldiamter på op til 16 mm skal der anvendes 2 låse per samling, og fra 17 mm og opefter skal der anvendes én lås per samling.
Efterspændes efter første belastning.

Wire rope grips, E Grip, galv.

E Grip-wire rope grips are approved for lifting purposes. For steel wire ropes with diameters up to 16 mm two grips must be used per joint. For steel wire ropes with diameters from 17 mm and up one grip must be used per joint. The grips are to be retightened after the first use.

2


Varenr. / Item no.	Wireldiam. mm	L mm	D mm	Bolte / Bolts	Tilspænding / Tighten Nm lb ft	Vægt / Weight kg
260-100-1011	11	63	43	2	30 21,7	0,50
260-100-1016	15-16	100	62	2	115 83,2	1,70
260-100-1021	20-21	163	79	4	282 204,0	4,30

**Wirelåse, galvaniserede
DIN 741**

Handelskvalitet – ikke godkendt til løfteopgaver.
Wirelåsen skal monteres som vist på illustrationen.
Møtrikkerne skal efterspændes efter belastning af wiren. Afstanden mellem wirelåsene skal være ca. 6 x wireldiameteren.

**Wire rope grips, galv.
DIN 741**

Commercial Quality – Not approved for lifting applications.
The grips must be fitted as illustrated. The nuts must be retightened after use. The distance between the grips must be approx. 6 x wire rope diameter.



Varenr. / Item no.	Dia. tommer/inches	Wireldia. / Wire dia. mm	Antal pr. øje / Number per eye
260-200-1035	1/8	3.5	3
260-200-1050	3/16	4-5	3
260-200-1065	1/4	5.5-6.5	3
260-200-1080	5/16	7-8	3
260-200-1095	3/8	8.5-9.5	3
260-200-1110	7/16	10-11	3
260-200-1130	1/2	12-13	3
260-200-1150	9/16	14-15	3
260-200-1170	5/8	16-17	5
260-200-1190	3/4	18-19	5
260-200-1230	7/8	20-23	5
260-200-1260	1	24-26	5
260-200-1300	1 1/8	27-30	5
260-200-1340	1 1/4	31-32	7
260-200-1380	1 1/2	35-38	7

**FYNS KRAN UDSTYR A/S****www.fku.dk****2-30****STÅLWIRER & TILBEHØR / STEEL WIRE ROPES & FITTINGS****2****Wireløse, rustfrie****DIN 741.****Wire rope grips, stainless****DIN 741.**


Varenr. / Item no.	Dim. mm	Wiredim. / Wire dim. mm
280-150-1020	2	2,0
280-150-1030	3	3,0
280-150-1040	4	4,0
280-150-1050	5	5,0
280-150-1060	6	6,0
280-150-1080	8	8,0
280-150-1100	10	10,0
280-150-1120	12	12,0
280-150-1130	13	13,0
280-150-1160	16	16,0

Bardunstrammere, galvaniserede**DIN 1480**


Åbne. Leveres i de anviste størrelser.

Turnbuckles, galv.**DIN 1480**


Open. Supplied in the versions below.

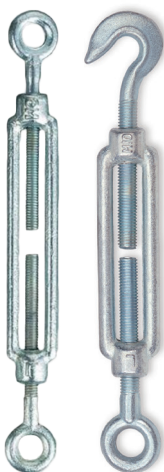

Varenr. / Item no.	Dim. (d) mm	Type	L mm	L1 mm
261-450-2005	M5	øje/øje / eye/eye	70	35
261-450-2006	M6	øje/øje / eye/eye	110	55
261-450-2008	M8	øje/øje / eye/eye	110	57
261-450-2010	M10	øje/øje / eye/eye	125	68
261-450-2012	M12	øje/øje / eye/eye	125	70
261-450-2014	M14	øje/øje / eye/eye	-	-
261-450-2016	M16	øje/øje / eye/eye	170	88
261-450-2020	M20	øje/øje / eye/eye	200	105
261-450-3005	M5	øje/krog / eye/hook	70	34
261-450-3006	M6	øje/krog / eye/hook	110	55
261-450-3008	M8	øje/krog / eye/hook	110	57
261-450-3010	M10	øje/krog / eye/hook	125	68
261-450-3012	M12	øje/krog / eye/hook	125	70
261-450-3014	M14	øje/krog / eye/hook	-	-
261-450-3016	M16	øje/krog / eye/hook	170	105

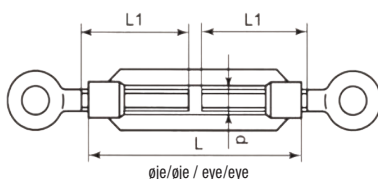

øje/øje / eye/eye

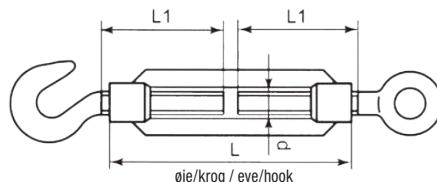

øje/krog / eye/hook

ODENSE | KØBENHAVN | ESBJERG | AALBORG**+45 7015 2015 | fku@fku.dk**



Ovenstående version lagerføres.
The above version is kept in stock.



Kan leveres i fire udførelser.
Available in four versions.

Vantskruer



Leveres i fire udførelser. Leveres varmgalvaniserede.
Større dimensioner kan leveres. Sikkerhedsfaktor 5:1.
Tolerance $\pm 5\%$ på alle mål.

Turnbuckles

Available in four versions. Hot-galvanized.
Available in large dimensions. Safety factor 5:1.

Varenr. / Item no.	Dim. mm	WLL tons/tonnes	Take up range (mm)	B mm	N mm	L mm	M mm	K mm	Vægt / Weight kg
261-400-1006	M6*	-	80	100	175	5	18	8	0,13
261-400-1008	M8*	-	85	110	210	6	25	9	0,25
261-400-1010	M10*	0,50	90	125	225	8	20	9,5	0,30
261-409-0012	M12*	0,70	155	195	315	10	30	13	0,66
261-400-1016	M16*	1,20	185	230	380	12	44	18	1,4
261-400-1020	M20	1,50	210	270	450	16	50	20	2,20
261-400-1022	M22	2,20	230	295	500	20	60	25	3,42
261-400-1024	M24	3,20	250	325	555	22	65	28	4,64
261-400-1032	1 1/4	4,80	290	370	680	28	85	38	8,84
261-400-1038	1 1/2	6,00	300	400	760	32	100	45	14,80
261-400-1044	1 3/4	8,50	290	400	760	38	105	50	21,00
261-400-1052	2	11,00	290	400	820	45	120	58	24,40

*Ikke godkendt til løft uden individuel test og mærkning.

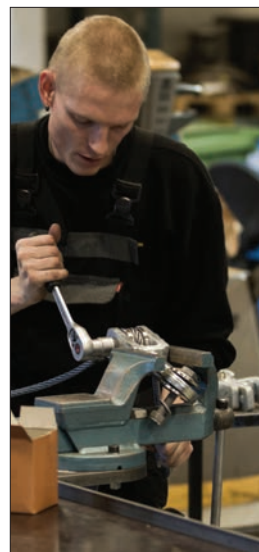



Vantskruer, galvaniseret type: Anja 800 series

Dim. iht. BS 4429

Lukket krop med låsemøtrikker på terminaler (WLL 2,5T - 17T)


Sikkerhedsfaktor 5:1.

Turnbuckles, galvanized type: Anja 800 series

Dim. generally to BS 4429


Closed body with locknuts on terminals (WLL 2,5T - 17T)

Safetyfactor 5:1

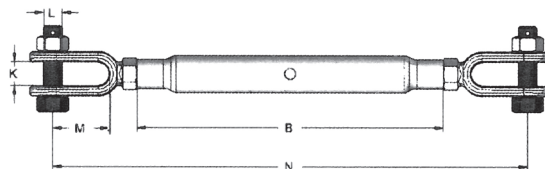


Type A.

Varenr. / Item no. Type A	Threads	WLL tons/tonnes	Take up	B mm	N mm	L mm	M mm	K mm	H mm	G mm	F mm	Vægt / Weight kg
261-401-0025	M20	2,5	210	270	455	16	50	20	50	24	16	2,3
261-401-0050	M24	5,0	250	340	570	22	65	28	56	28	19	4,6
261-401-0070	1 1/4"	7,0	270	370	680	28	85	38	70	35	22	8,0
261-401-0100	1 1/2"	10,0	300	420	790	32	100	45	78	40	25	14,0
261-401-0130	1 3/4"	13,0	360	500	870	39	105	50	90	45	30	24,0
261-401-0170	2"	17,0	450	600	1.030	45	120	58	100	45	35	38,0
261-401-0272	2 1/2"	27,2	600	800	1.490	57	140	75	-	-	-	73,0
261-401-0340	2 3/4"	34,0	600	800	1.570	70	145	89	-	-	-	98,0

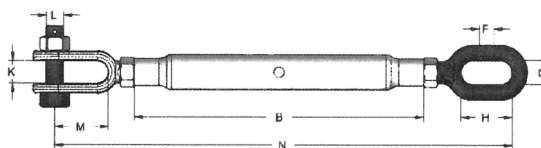

Type B (leveres på forespørgsel).

Type B (on request).

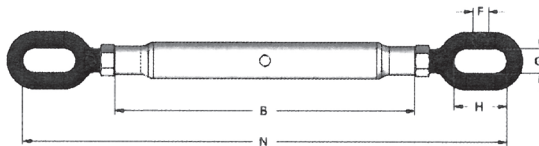

Type B (leveres på forespørgsel).

Type B (on request).


**Vantskruer, rustfrie**

Med lukket krop og kontramøtriker.

Turnbuckles, stainless

With closed body and lock-nuts.

Varenr. / Item no.	Dim. mm	L mm	L1 mm	A mm	D mm	Brudstyrke kg / Breaking load kg
280-300-1006	6,0	150,0	95,0	7,5	6,2	1.250,0
280-300-1008	8,0	180,0	105,0	10,0	8,4	1.300,0
280-300-1010	10,0	220,0	125,0	12,0	9,4	2.600,0
280-300-1012	12,0	270,0	150,0	14,0	12,3	5.100,0
280-300-1016	16,0	330,0	190,0	16,0	16,0	8.000,0

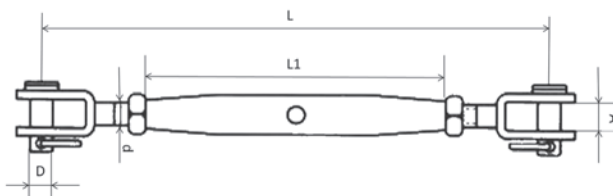**Klemmekovse
Type IronGrip KK-100**


IronGrip skader ikke ståltovet.
IronGrip er let at montere, selv i øjer og ringe.
IronGrip skal altid efterspændes efter første træk.
IronGrip må anvendes til løfteformål, når samlingen sikres med en ekstra "IronGrip" wirelås type BG-M.
IronGrip monteres hurtigt med et minimalt pladsforbrug på wiren.

NB! Virkningsgrad minimum 90% af wirens MBL.**Wire rope thimble clamps
Type IronGrip KK-100**

IronGrip will not damage the wire rope.
IronGrip easy to fit, even in eyes and rings.
IronGrip must be retightened after initial use.
IronGrip must not be used for hoist applications unless fitted with an extra IronGrip type BG-M.
IronGrip is mounted quickly with minimal space on wire.


NB! Efficiency minimum 90 % of the wire MBL..

Varenr. / Item no.	Dim. mm	Wire dia. / Wire dia. mm	D mm	d mm	A mm	G mm	L mm
261-600-1005	M6	5 – 6	22	16	12	26	32
261-600-1009	M9	7 – 9,5	30	24	18	40	104
261-600-1012	M12	10 – 12,5	40	30	25	58	144
261-600-1016	M16	13 – 16,5	50	40	28	72	190
261-600-1020	M20	17 – 20,0	64	68	37	80	244



**Kovse, galvaniserede**

Målene nedenfor er vejledende, og der kan være mindre afvigelser.




DIN 6899

*Elektrogalvaniseret /
Electrogalvanised

Thimbles, galvanized

The dimensions mentioned below are just instructive and departures may occur.

Varenr. / Item no.	Wire dia. mm	C mm	l mm	S mm	RW mm
261-500-1025	2	12	19	1,1	3
261-500-1035	3	13	21	1,1	4
261-500-1040	4	14	23	1,6	5
261-500-1050	5	16	25	1,7	6
261-500-1060	6-7	20	32	2	8
261-500-1070	8-9	24	38	3,5	10
261-500-1100	10-11	28	45	3,5	12
261-500-1120	12-13	32	51	3,5	14
261-500-1140	14-15	36	58	4	16
261-500-1160	16-17	40	64	6	18
261-500-1180	18-19	45	72	6	20
261-500-1200	20-21	50	80	6	22
261-500-1220	22-23	56	90	8	24
261-500-1240	24-25	62	99	6,5	26
261-500-1260	26-27	70	112	8	28
261-500-1280	28-29	75	120	8	30
261-500-1300	30-31	80	128	8	32
261-500-1320	32-33	95	152	9	34
261-500-1340	34-35	100	160	9	36
261-500-1360	36-37	110	176	9	38

**Kovse rustfrie,
polerede****Thimbles stainless,
polished**

Varenr. / Item no.	Dim. mm	A mm	B mm	E mm	Vægt / Weight kg/stk. / pcs.
280-450-1030	3,0	12,0	19,0	3,0	0,0020
280-450-1040	4,0	13,0	21,0	4,0	0,0040
280-450-1050	5,0	14,0	23,0	5,0	0,0050
280-450-1060	6,0	16,0	25,0	6,0	0,0070
280-450-1070	7,0	18,0	28,0	7,0	0,0120
280-450-1080	8,0	20,0	32,0	8,0	0,0150
280-450-1100	10,0	24,0	38,0	10,0	0,0290
280-450-1120	12,0	28,0	45,0	12,0	0,0520
280-450-1140	14,0	32,0	51,0	14,0	0,0520
280-450-1160	16	38,0	61,0	17,0	0,1900
280-450-1180	18	40,0	64,0	18,0	0,2030
280-450-1200	20	45,0	72,0	20,0	0,2730




Kilewirelåse, S03

Korrekt monteret har kilewirelåsen en virkningsgrad på min. 80% af wirens min. brudlast. Korrekt montering betyder montering af en traditionel wirelås til sikring af wirens løse ende. Den traditionelle wirelås må ikke monteres omkring den bærende part.

Wedge sockets for wire rope, S03


Correctly fitted, a wedge socket has an efficiency of min. 80% of the wire ropes breaking strength. Correct fitting means using a traditional steel wire rope grip to ensure the loose end of the wire rope. The wire rope grip must not be fitted on the carrying wire rope part.

2




Varenr. / Item no.	Type No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	Vægt / Weight kg
260-350-1100	0,5	9-10	10	146	47	21	20	11	26	1,7
260-350-1130	1	11-13	16	146	57	26	20	12	32	2,3
260-350-1160	2	14-16	25	176	70	32	30	14	44	3,9
260-350-1190	3	17-19	32	212	80	38	35	16	44	6,1
260-350-1220	4	20-22	45	240	96	44	41	19	52	9,3
260-350-1260	5	23-26	70	274	114	51	50	22	58	15
260-350-1290	6	27-29	100	310	130	57	57	25	66	21
260-350-1320	7	30-33	125	350	146	63	63	28	79	33
260-350-1360	8	34-36	125	400	148	69	63	28	79	39
260-350-1400	9	37-40	150	450	160	76	70	30	93	53
260-350-1430	10	41-43	200	500	174	76	76	33	95	68
260-350-1480	11	44-48	260	550	200	89	89	39	111	98
260-350-1530	12	49-53	280	650	200	101	95	46	140	123
260-350-1560	13	54-59	360	660	250	113	108	53	136	178
260-350-1630	14	60-68	450	840	270	127	121	60	161	281
260-350-1750	15	72-76	520	1000	300	146	133	76	186	469

Tolerance $\pm 5\%$, machined parts ± 1 mm.

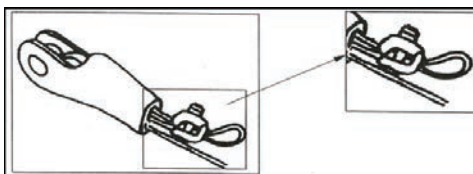


Halen skal altid sikres med en traditionel wirelås.
Always secure the tail using traditional wire rope grips.

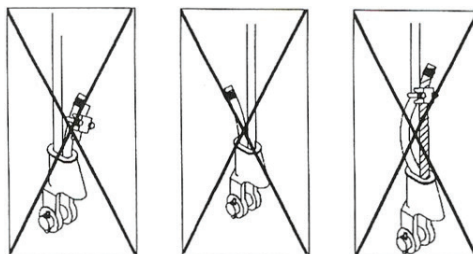

Det er ikke tilladt at montere den traditionelle wirelås om den bærende part.
Do not mount the traditional wire rope grip on the supporting part.



Crosby




Wirekovse, massive, Crosby Type S-412

Forhindrer vridning af wiren.
Passer for kilewirelås Crosby type S-412.

Wire rope thimbles, solid, Crosby Type S-412

Prevent the wire rope from twisting.
Suitable for wedge socket Crosby S-412.

Varenr. / Item no.	Wiredia. / Wiredia. mm	A mm	B mm	C mm	D mm	Vægt / Weight kg
261-551-0013	13	71	54	22	25	0,30
261-551-0016	16	119	86	30	30	1,00
261-551-0020	18-20	119	86	35	35	1,50
261-551-0022	22	154	114	41	41	2,50
261-551-0026	24-26	154	114	46	51	3,40
261-551-0030	28-30	184	137	52	57	4,21
261-551-0035	32-35	184	137	59	64	4,50





Wirekovse, massive DIN 3091.

Wire rope thimbles, solid DIN 3091.

Varenr. / Item no.	Wiredia. / Wiredia. mm	a mm	b mm	d1 Standarddim. Standard pin hole mm	c mm	l mm	Vægt / Weight kg
261-550-1018	10	11	17,5	18	50	82	0,3
261-550-1221	12	13	20	21	60	98	0,5
261-550-1425	14	16	23,5	25	70	114	0,7
261-550-1627	16	18	26,0	28	80	130	0,8
261-550-1823	18	20	28,5	31	90	145	1,1
261-550-2035	20	22	31,0	35	100	161	1,4
261-550-2238	22	24	33,5	38	110	177	1,8
261-550-2441	24	26	36,0	41	120	193	2,3
261-550-2644	26	29	39,5	44	130	209	3,0
261-550-2843	28	31	42,0	47	140	224	3,7
261-550-3253	32	35	47,0	53	160	256	5,3
261-550-3659	36	40	53,0	59	180	288	7,5

Tolerance $\pm 5\%$.

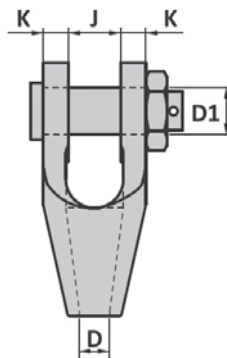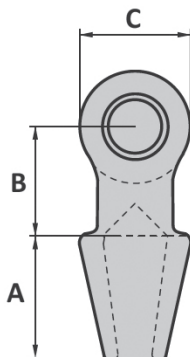

Wiresko, åbne, S02

Fremstillet i støbegods.

Rå udførsel som standard men kan efter ønske leveres galvaniseret.

Open spelter sockets, S02


Made of cast steel.

Self coloured. Ungalvanized as standard. Can also be delivered galvanized.

Varenr. / Item no.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	D1 mm	J mm	K mm	Vægt / Weight kg
261-750-1006	6-7	8	52	40	34	8	18	17	8	0,44
261-750-1008	8-10	12	58	45	40	11	21	20	11	0,81
261-750-1011	11-13	20	64	51	49	14	26	25	12	1,3
261-750-1014	14-16	25	77	64	62	18	30	32	14	2,3
261-750-1018	17-19	40	89	76	100	21	35	38	16	3,2
261-750-1020	20-22	45	101	89	86	24	41	44	19	5,4
261-750-1024	23-26	70	114	101	114	28	51	51	22	9,6
261-750-1028	27-30	100	127	114	124	32	57	57	25	12
261-750-1032	31-36	125	139	127	135	38	63	63	28	16
261-750-1037	37-39	150	152	162	152	41	70	76	30	24
261-750-1040	40-42	200	165	165	168	44	76	76	33	29
261-750-1044	43-48	260	191	178	190	51	89	89	39	45
261-750-1050	49-54	280	216	229	206	57	95	101	46	65
261-750-1055	55-60	360	229	254	225	63	108	113	53	88
261-750-1061	61-68	450	248	273	251	73	121	127	60	125
261-750-1069	69-75	480	279	279	266	79	127	133	73	162
261-750-1076	76-80	520	305	286	274	86	133	146	76	195
261-750-1081	81-86	600	330	298	286	92	140	159	79	224
261-750-1087	87-93	700	356	318	310	99	152	171	83	280
261-750-1094	94-102	875	381	343	352	108	178	191	89	378
261-750-1108	108-115	1100	460	480	430	125	190	208	101	564
261-750-1122	122-130	1250	500	500	550	138	250	210	120	922
261-750-1140	140-155	1400	580	500	590	160	275	230	140	1295
261-750-1158	158-167	1600	675	600	640	175	290	310	175	1950



2

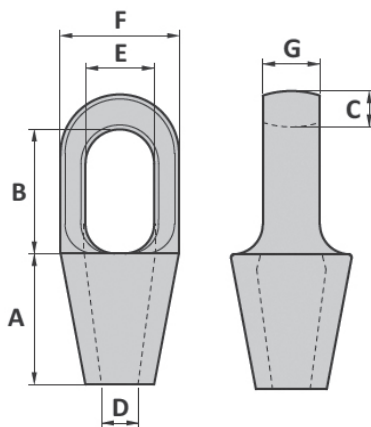

Wiresko, lukkede, S01

Fremstillet i støbegods – galv.

Closed spelter sockets, S01

Made of cast steel – galv.

Varenr. / Item no.	Wire dia mm	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Vægt / Weight kg
261-750-3006	6-7	8	52	46	11	8	20	37	13	0,27
261-750-3008	8-10	12	58	53	14	11	24	43	16	0,44
261-750-3011	11-13	20	64	59	18	14	29	51	22	0,74
261-750-3014	14-16	25	77	65	21	18	35	67	25	1,4
261-750-3018	17-19	40	90	75	26	21	42	75	31	2,1
261-750-3020	20-22	45	101	90	33	24	47	92	38	4
261-750-3023	23-26	70	114	103	36	28	57	106	45	5,9
261-750-3027	27-30	100	127	116	39	32	63	114	51	7,7
261-750-3031	31-36	125	139	130	44	38	70	128	58	11
261-750-3037	37-39	150	152	155	51	41	79	137	64	14
261-750-3040	40-42	200	165	171	54	44	82	146	70	18
261-750-3043	43-48	260	190	198	55	51	89	171	77	28
261-750-3049	49-54	280	216	224	62	57	98	194	84	40
261-750-3055	55-60	360	228	247	73	65	110	216	94	52
261-750-3061	61-68	450	248	270	80	73	140	241	102	63
261-750-3069	69-75	480	279	286	79	79	159	273	124	89
261-750-3076	76-80	520	305	298	83	86	171	292	133	111
261-750-3081	81-86	600	330	311	102	92	184	311	146	143
261-750-3087	87-93	700	356	330	102	99	197	330	159	166
261-750-3094	94-102	875	381	356	108	108	216	362	178	217
261-750-3108	108-115	1100	460	425	120	125	235	405	190	338
261-750-3122	122-130	1250	500	475	140	138	270	515	210	579
261-750-3140	140-155	1400	580	550	150	160	300	510	250	654
261-750-3158	158-167	1600	675	600	175	175	325	600	300	1063

Tolerance $\pm 5\%$.




Tovpærer, Nemag

For montering af wire ved istøbning.

Rope Pear Sockets, Nemag

For wire rope socketing.



Varenr. / Item no.	Wire dia. / Wire dia. mm	Str. / Size	WLL kg	MBL kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Vægt / Weight kg
262-050-1016	16-17	4	3000	22500	123	70	31	220	19,5	17,5	26	31	18	0,9
262-050-1018	18-19	5	4500	27500	135	84	33	245	21	19	30	42	20	1,3
262-050-1020	20-21	6	5000	35000	152	84	36	310	23	21	33	38	23	1,7
262-050-1022	22-24	7	7000	42500	166	100	40	310	26	23	37	48	26	2,3
262-050-1025	25-27	8	8000	52500	186	100	43	350	28	25	39	44	29	3,2
262-050-1028	28-30	9	11000	70000	202	120	45	350	31	27	40	58	32	4,1
262-050-1031	31-33	10	13000	85000	222	120	52	445	32	28,5	45	56	37	5,2
262-050-1034	34-36	11	15000	95000	239	142	55	445	36	31,5	50	70	40	6,4
262-050-1037	37-39	12	17000	110000	264	142	60	495	39	34,5	51	64	41	7,9
262-050-1042	40-42	13	21000	125000	285	166	63	555	43	36,5	59	80	44	9,5




Quick release links, Nemag

Leveres til alle tovpærer.

Quick release links, Nemag

For all Rope Pear Sockets.



Varenr. / Item no.	WLL kg	MBL kg	A mm	B mm	C mm	D mm	E mm	F mm	Vægt / Weight kg
262-100-1004	3000	25000	76	76	24,5	19	30	21	0,9
262-100-1005	4500	33000	84	84	27	21	32,5	23	1,2
262-100-1006	5000	37500	92	92	29,5	23	35	25	1,5
262-100-1007	7000	49000	100	100	32	25	38	28	2,0
262-100-1008	8000	54000	108	108	34,5	27	40,5	31	2,5
262-100-1009	9500	60000	116	116	37	29	43,5	34	3,1
262-100-1010	12000	75000	128	128	40,5	32	48	37	4,4
262-100-1011	15000	95000	140	140	44	35	53	40	5,7
262-100-1012	17000	110000	152	152	47,5	38	57	43	7,2
262-100-1013	21000	135000	164	164	51	41	61,5	46	8,7



Frøllår

Wirespændeklemmer "frøllår" anvendes til udskiftning af wirer og kabler, fremtræk af wirer og kabler, montering af transportbånd etc. Må ikke benyttes til løft og hejs. Let at af- og påmontere. Fremstillet af stål med hærdede og riflede kæber. Kan bruges til wire, kabler og reb af stål eller kobber. Arbejder efter princippet: Større træk = fastere greb.

Tighten clamps for wire ropes

Tighten clamps are used for replacing ropes and cables, rope and cable pulling, conveyor erection, etc. Must not be used for lifting and hoisting purpose. Easy to fit and remove. Made of steel with hardened and serrated jaws. Made for wires, cables and rope of steel or copper. Operating principle: Stronger pull = tighter grip.

Varenr. / Item no.	Wire dia. / Wire dia. mm	Indv. L i øje / Inner L in eye mm	Vægt / Weight kg
260-400-1040	1-4	19	0,25
260-400-1080	3-8	21	0,85
260-400-1100	5-10	27	1,15
260-400-1160	8-16	28	1,9
260-400-1260	12-26	28	3,6
260-400-1380	20-38	28	5,8



Tractel Coni-Klam


Wiren holdes af et par kæber, der er let savtakkede, og som giver en positiv lås ved en selvgribende kile.

Tractel Coni-Klam

The wire rope is held by a pair of jaws, which are slightly serrated and which give a positive lock by a self-gripping wedge.



Varenr. / Item no.	Type	Range of wire rope mm	Kapacitet / Capacity kg	Vægt uden sjækel / Weight excl. shackle kg	Vægt uden sjækel / Weight incl. shackle kg
På forespørgsel / On request	EC 10	5-10	1,000	1,2	1,6
På forespørgsel / On request	EC 14	10,5-14	2,000	2,6	8,1
På forespørgsel / On request	EC 21	15-21	3,000	5,4	16,5



Wirestrømper

Kranwirestrømper er arbejdsbesparende og et uundværligt hjælpemiddel ved montage af wiver på kraner og bør være i enhver kranførers og kranmontørs værktøjskasse.

Leveres i to udførelser:

- A) Begge ender åbne – anv. til mont. af kranwiver.
 - B) En ende lukket med trækøje – anv. til kabeltrækning.
- Kan også leveres med svirvel.



Andre dimensioner på forespørgsel.

*Ikke godkendt til løfteopgaver.

Cable socks

Cable socks save work and is an indispensable item in every crane driver's or crane fitter's toolbox.

Available in two versions:

- A) Both ends open – for crane rope installation.
 - B) One end closed with pulling eye – for cable pulling.
- Also available with swivel.

2

Varenr. / Item no.	Dim. mm	Type	kg	Længde / Length ca. cm
261-000-1014	10-15	A	120	35
261-000-1025	15-24	A	200	55
261-000-2024	15-24	B	200	55
261-000-1030	22-32	A	325	60
261-000-2032	22-32	B	325	60
261-000-1040	32-45	A	750	95

Other sizes available on request.

*Not approved for lifting.

Wirelock

Til støbning af tovpære / wiresko.

Wirelok er et 2-komponent koldhærdningsprodukt, der ikke kræver specielle hjælpemidler for istøbning. Wirelock er godkendt af Arbejdstilsynet, Lloyd's mf. Wirelock tåler stød, slag og chockpåvirkninger. Wirelock er klar til brug ca. 1 1/2 time efter istøbning.



Wirelock

For wire rope socketing.

Wirelock is a two-component cold-hardening product that does not require other agents for embedding. Wirelock is approved by Danish National Labour Inspection, Lloyd's, etc. Wirelock withstands impact and shock. Wirelock is ready for use approx. 1 1/2 hour after embedding.

Varenr. / Item no.	Indhold / Content
262-500-0250	0.25 L
262-500-0500	0.50 L
262-500-1000	1.00 L
262-500-2000	2.00 L
262-500-3000	3.00 L



Kasteblokke

Type: Gunnebo Johnson

Med krog.

Snatch blocks

Type: Gunnebo Johnson

With hook.

Varenr. / Item no.	Type / Type	WLL tons/tonnes	Wire dia. mm	Skive diameter Sheave diameter	Vægt / Weight kg
270-100-7012	SB2S3BH	2	8-10	3" / 80 mm	2,3
270-100-7013	SB4S4BH	4	10-13	4" / 100 mm	6,8
270-100-7014	SB8S8BH	8	16-20	8" / 200 mm	15,9
270-100-7015	SB12S8BH	12	20-22	8" / 200 mm	25,9
270-100-7016	SB20S10BH	20	26-30	10" / 250 mm	43,1



Kasteblokke

Type: Gunnebo Johnson

Med sjækkel.

Snatch blocks

Type: Gunnebo Johnson

With shackle.

Varenr. / Item no.	Type / Type	WLL tons/tonnes	Wire dia. mm	Skive diameter Sheave diameter	Vægt / Weight kg
270-100-7001	SB2S3BS	2	8-10	3" / 80 mm	2,3
270-100-7002	SB4S4BS	4	10-13	4" / 100 mm	7,3
270-100-7003	SB4S6BS	4	10-13	6" / 150 mm	9,5
270-100-7004	SB8S6BS	8	16-20	6" / 150 mm	13,2
270-100-7005	SB8S10BS	8	16-20	10" / 250 mm	19,5
270-100-7006	SB12S8BS	12	20-22	8" / 200 mm	27,7
270-100-7007	SB12S10BS	12	20-22	10" / 250 mm	33,6
270-100-7008	SB15S8BS	15	20-22	8" / 200 mm	28,1
270-100-7009	SB15S10BS	15	20-22	10" / 250 mm	34,0
270-100-7010	SB20S16BS	20	26-30	16" / 400 mm	43,1
270-100-7011	SB30S20BS	30	30-32	20" / 500 mm	123,8



Kasteblokke, YellowLine

Med sjækkel.

Snatch blocks, YellowLine

With shackle.

Varenr. / Item no.	WLL tons/tonnes	Wire dia. mm	A mm	B mm	C mm	Skive diameter Sheave diameter	Vægt / Weight kg
270-500-0020	2	7-9	286	82	70	75 mm	3,9
270-500-0040	4	16-18	399	160	70	150 mm	8,4
270-500-0080	8	20-22	528	210	93	200 mm	19
270-500-0120	12	24-26	679	260	115	250 mm	36



Kasteblokke med svirveløje, Charlet

Type ETM (sjækel)

Type ETC (krog)

Leveres med svirvelkrog eller svirvelsjækel. Smørenippel monteret på navet og derfor beskyttet mod slag m.m. Kan også leveres som 2-skivet kasteblok. Kan åbnes uden brug af værktøj, så wiren kan indsættes hurtigt og nemt. Sikkerhedsfaktor 4:1.



Snatch blocks with swivel eye, Charlet

Type ETM (shackle)


Type ETC (hook)

Supplied with swivel hook or swivel shackle eye with bronze-bushed steel pulley. Lubricating nipple mounted on the hub and thus protected against impacts etc. Can be opened without using any tools, so the wire rope can be inserted quickly and easy. Can also be supplied as double-pulley snatch block. Safety factor 4:1.

2

* 1) Selvmørende leje. 2) Bronze leje. 3) Kugleleje eller rulleleje.


Varenr. / Item no. Type ETM	Varenr. / Item no. Type ETC	Type	WLL tons/- tonnes	F mm	E mm	C mm	I krog mm	I sjækel mm	O mm	D mm	Egenvægt kg	Leje*
270-100-2010	270-100-3010	2-79E10	2	60	79	9/10	218	219	30	33	2,7	1
På forespørgsel / On Request	På forespørgsel / On Request	5-114E14	5	90	114	12/14	318	327	39	51	8	2
270-100-2030	270-100-3030	5-165E14	5	140	165	12/14	369	378	39	51	10,5	2
På forespørgsel / On Request	På forespørgsel / On Request	8-142E19	8	112	142	17/19	397	400	48	58	15	2
270-100-2040	270-100-3040	8-209E19	8	117	209	17/19	431	434	48	58	20	2
På forespørgsel / On Request	På forespørgsel / On Request	8-262E19	8	221	262	17/19	457	460	48	58	25	3
På forespørgsel / On Request	På forespørgsel / On Request	8-326E23	8	275	326	20/23	495	498	48	58	29	3
På forespørgsel / On Request	På forespørgsel / On Request	12-145E23	12,5	112	145	20/23	453	444	57	68	30	2
270-100-2060	270-100-3060	12-216E23	12,5	174	216	20/23	488	479	57	68	35	3
På forespørgsel / On Request	På forespørgsel / On Request	12-216E29	12,5	174	216	26/29	497	488	57	68	35	2
270-100-2070	270-100-3070	15-262E23	15	221	262	20/23	560	574	57	83	38	3
På forespørgsel / On Request	På forespørgsel / On Request	15-326E23	15	275	326	20/23	592	607	57	83	45	3
På forespørgsel / On Request	På forespørgsel / On Request	15-420E23	15	355	420	20/23	639	653	57	83	65	3
270-100-2080	270-100-3080	20-216E29	20	174	216	26/29	553	576	44	89	39	3
På forespørgsel / On Request	På forespørgsel / On Request	20-268E38	20	224	268	35/38	583	606	44	89	56	3
På forespørgsel / On Request	På forespørgsel / On Request	20-410E38	20	349	410	35/38	653	676	44	89	70	3
270-100-2110	På forespørgsel / On Request	25-262E29	25	221	262	26/29	648	665	52	98	62	3
På forespørgsel / On Request	På forespørgsel / On Request	25-326E29	25	270	326	26/29	680	697	52	98	85	3
På forespørgsel / On Request	På forespørgsel / On Request	32-334E46	32	270	334	42/46	713	761	59	110	95	3
På forespørgsel / On Request	På forespørgsel / On Request	32-518E46	32	443	518	42/46	805	853	59	110	135	3

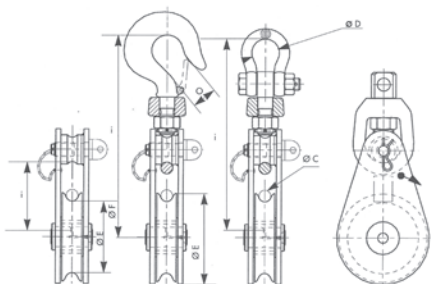



Wirekiver, type BE

Løse stålkiver. Bronzeforing og smørenippel på navet.
Ved bestilling af wirekiver til Charlet kastebløkke
type CA, skal der også bestilles ekstra stålbøsning.
Wirekiver indtil 2000 mm i diameter leveres efter
bestilling.



Sheaves, type BE

Separate steel sheaves. Bronze bush and lubricating
nipple on the hub. When ordering sheaves for the type
CA Charlet snatch blocks, extra steel bushes must also
be ordered. Steel sheaves up to 2000 mm in diameter
can be supplied on request.

Varenr. / Item no.	Type	Wire dia. / Wire dia. mm	E mm	F mm	J mm	L mm	M mm	O mm	P mm
270-050-1010	CA80C90CM	8	100	80	27,5	28,5	33	22	28
270-050-1020	CA132C12VM	11	160	132	32,0	34,5	47	30	37
270-050-1030	CA160C15VM	14	200	160	43,5	46,5	48	30	37
270-050-1040	CA210C18CM	18	250	210	51,5	54,0	70	52	62



Wirekiver, type BC

Ø 100-250 mm. I svejset stål, bronze forring for lav
rotation. Overflade: Malet eller forzinket.



Sheaves, type BC

Ø from 100 to 250 mm. The short hub facilitates the
less bulky mounting. In welded pressed steel, bronze
bushed for low rotation. FINISH : painted or zinc
bichromated.

Varenr. / Item no.	Type	Wire dia. / Wire dia. mm
På forespørgsel / On Request	CA86C8MVC	8
På forespørgsel / On Request	CA140C11VMC	11
På forespørgsel / On Request	CA172C15VMC	14
På forespørgsel / On Request	CA212C19VMC	18

