


FLEXI-DIP™

**OXYGEN SENSOR
GAUGING
TAPE**



**Grounding
cable is
standard
equipment.**

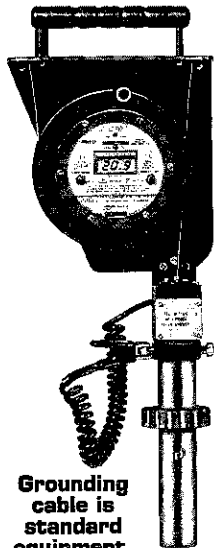

Oxygen Sensor



Keeping You in Control

FLEXI-DIP™

OXYGEN SENSOR GAUGING TAPE

The battery operated, intrinsically safe, Flexi-Dip oxygen sensor is a fast and convenient way to measure oxygen content within a closed vessel. For petroleum carrying vessels using an inert gas blanket within their cargo tanks, the determination of oxygen content is a must, to insure the validity of a properly operating inert gas system. The easy use and built-in self-calibrator provides the operator with a direct and reliable means of insuring vessel safety.

GENERAL SPECIFICATIONS

ACCURACY: Over the 1% to 25% range: $\pm 0.2\%$
Of Sensor Positioning: $\pm 1/8"$ ($\pm 3\text{mm}$)
Oxygen Sensor Measurement Range:
0% to 25%

BATTERY: 9 Volt Eveready #522; or Mallory MN1604

TAPE LENGTHS (Standard): 50 ft. (15 Meters)
(Optional): 100 ft. (30 Meters)

HAZARDOUS ENVIRONMENT PROTECTION:
Intrinsically Safe


APPROVALS: BASEEFA & Factory Mutual (Pending)

NOTE: Not approved for human occupancy certification.

PRODUCT CODE (for ordering):

2615R050FMSTD

Flexi-Dip Oxygen Sensor —
Restricted (Cor F) —
50 ft. (15 M), 100 ft. (30 M) —
Approvals - FM (FM), BS (BASEEFA)
CS (CSA), SA (SAA) —
BARRELS -
STD (Standard Valves) A, B, U, UB & S —
MM (Micro & Mini-Micro Valves) —
F50 - MMC(A) F50 & C —
TS - Hermetic 2" Valve (A.2-SS) —

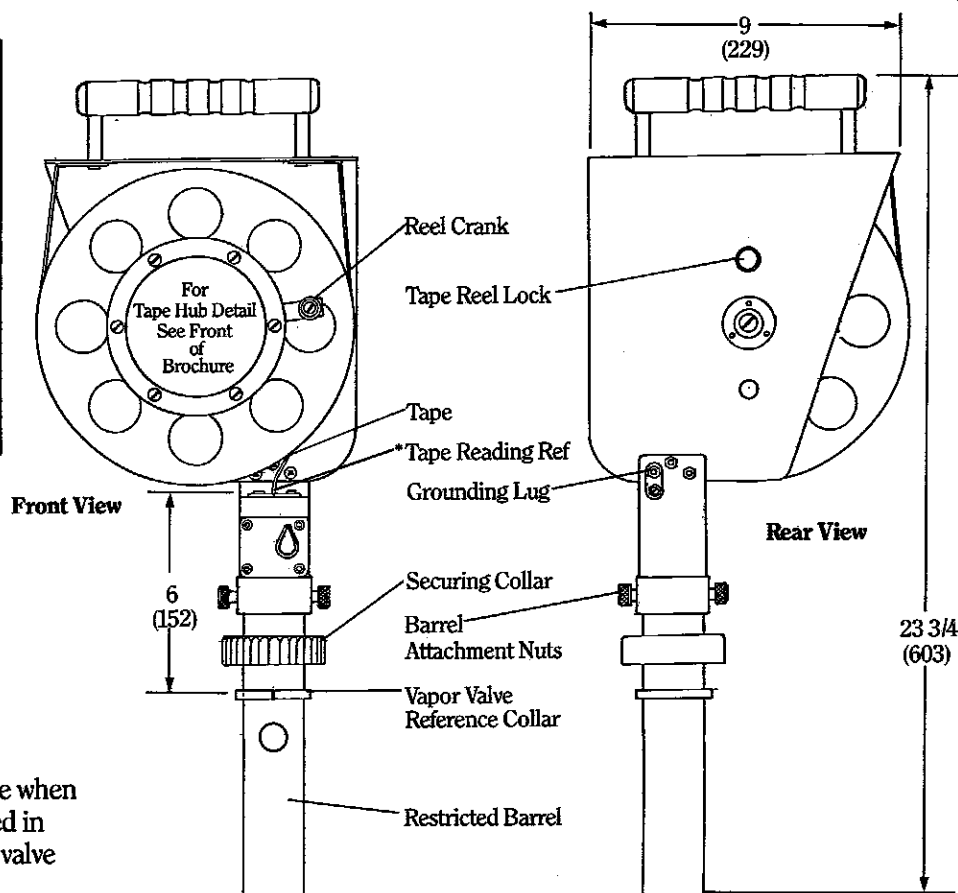

*For zero ullage when
tape is installed in
vapor control valve

MMC International Corp.



Keeping You in Control

MMC International Corp.
60 Inip Drive
Inwood, NY 11696-1096 U.S.A.
Phone: 800-645-7339
516-239-7339
Telex: 96-0140 MAMCAF INND
Fax: 516-371-3134

MMC (Europe) Ltd.
South Nelson Road
South Nelson Industrial Estate
Cramlington
Northumberland NE23 9HL UK
Phone: 0670-738111
Telex: 537005 MARINE G
Fax: 0670-738789

MMC (Asia) Ltd.
2-20, 4-Chome, Isobe-Dori
Chuo-ku, Kobe 651
Japan
Phone: 078-251-1033
Telex: 5624163 OPECK J
Fax: 078-252-0265