

LIFTING SYSTEMS





TABLE OF CONTENTS

LIFTING SYSTEMS

AL-100 HAND CHAIN HOIST SERIES	4-7
L-100 HAND CHAIN HOIST SERIES	8-1
S-90 HAND CHAIN HOIST SERIES	12-1
JLH COMPACT LEVER HOIST SERIES	5 16
JLP-A MINI-PULLERS LEVER HOIST	SERIES 1
JLH LEVER HOIST SERIES	18-2
JLA LEVER HOIST SERIES	22-2
II D-A I EVED HOIST SERIES	26-20

MANUAL TROLLEYS	30-31
BEAM CLAMPS	32-33
VARIABLE SPEED ELECTRIC HOISTS	34-37
TWO SPEED ELECTRIC HOISTS	38-39
TWO SPEED MOTORIZED TROLLEYS	40-41
ELECTRIC HOISTS	42-45
CABLE & GRIP PULLERS	46-47

JET LIFTING SYSTEMS



HERITAGE

Hoists were the first products JET launched over 60 years ago. Since then JET has sustained a commanding presence in the industry as one of the premiere hoist manufacturers in the U.S. market.




PHILOSOPHY

Since 1958, our philosophy has been, and always will be, to satisfy the needs and demands of our customers.



INNOVATION

JET's extensive research and development results in industry-leading, innovative products that focus on safety and durability.

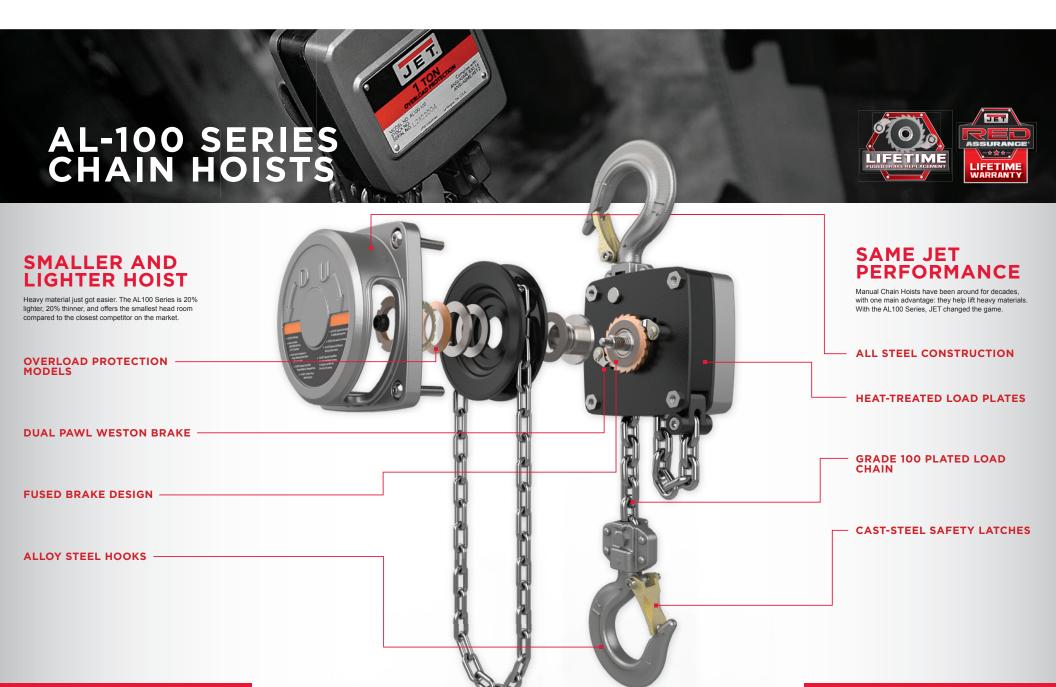

LIFTING SYSTEMS JETTOOLS.COM 5



AL-100 SERIES HAND CHAIN HOISTS



AL-100 SERIES HAND CHAIN HOISTS

SAFETY

- Weston-style Double Pawl System splits the load to opposite sides of the ratchet gear for added safety
- Patented Fused Brake Design provides durability and increases safety backed by a lifetime replacement warranty
- · Cast steel safety latches will not bend or deform
- Extra-large hand chain opening for side chain pulling

DURABILITY

- Grade 100 load chain is heat treated for additional strength and zinc plated for corrosion resistance
- Sealed housing provides extra protection against extreme elements

STANDARDS


Complies with ANSI/ASME B30.16 and HAST-2 Standards



STOCK NUMBER	MODEL NUMBER	CAPACITY (T)	CAPACITY (lbs.)	STANDARD LIFT (ft.)	HEADROOM (in.)	NO. OF FALLS	HAND CHAIN TO LIFT LOAD 1 FT. (ft.)	LBS. OF PULL TO LIFT CAPACITY	WEIGHT (lbs.)
AL-100 SE	RIES HAND CHAIN	HOISTS - 1/2 TO	ON						
133051	AL-100-050-10	1/2	1100	10	10-7/16	1	40	42	10.43
133052	AL-100-050-15	1/2	1100	15	10-7/16	1	40	42	13.42
133053	AL-100-050-20	1/2	1100	20	10-7/16	1	40	42	16.41
133054	AL-100-050-30	1/2	1100	30	10-7/16	1	40	42	22.39
AL-100 SE	RIES HAND CHAIN	HOISTS - 1 TON	ĺ						
133110	AL-100-100-10	1	2200	10	11-5/8	1	61	53	14.82
133115	AL-100-100-15	1	2200	15	11-5/8	1	61	53	18.65
133120	AL-100-100-20	1	2200	20	11-5/8	1	61	53	22.48
133130	AL-100-100-30	1	2200	30	11-5/8	1	61	53	30.14
AL-100 SE	RIES HAND CHAIN	HOISTS - 1-1/2	TON						
133121	AL-100-150-10	1-1/2	3300	10	13-13/16	1	71	72	27.39
133122	AL-100-150-15	1-1/2	3300	15	13-13/16	1	71	72	34.13
133123	AL-100-150-20	1-1/2	3300	20	13-13/16	1	71	72	40.88
133124	AL-100-150-30	1-1/2	3300	30	13-13/16	1	71	72	54.39
AL-100 SE	RIES HAND CHAIN	HOISTS - 2 TON	i						
133210	AL100-200-10	2	4400	10	15-3/8	1	90	81	33.07
133215	AL100-200-15	2	4400	15	15-3/8	1	90	81	40.47
133220	AL100-200-20	2	4400	20	15-3/8	1	90	81	47.86
133230	AL100-200-30	2	4400	30	15-3/8	1	90	81	62.64
AL-100 SE	RIES HAND CHAIN	HOISTS - 3 TON	ĺ						
133310	AL100-300-10	3	6700	10	18-1/2	2	143	114	39.14
133315	AL100-300-15	3	6700	15	18-1/2	2	143	114	49.76
133320	AL100-300-20	3	6700	20	18-1/2	2	143	114	60.37
133330	AL100-300-30	3	6700	30	18-1/2	2	143	114	81.61
AL-100 SE	RIES HAND CHAIN	HOISTS - 5 TON	ĺ						
133510	AL100-500-10	5	11200	10	22-13/16	2	191	82	66
133515	AL100-500-15	5	11200	15	22-13/16	2	191	82	81.85
133520	AL100-500-20	5	11200	20	22-13/16	2	191	82	97.71
133530	AL100-500-30	5	11200	30	22-13/16	2	191	82	129.43

AL-100 SERIES HOIST DIMENSIONS (IN.)

CAPACITY								
1/2 TON	3-1/2	3-5/8	1-7/8	1	15/16	1-3/8	1-11/16	10-7/16
1 TON	4	4-5/16	2	1-3/16	1-1/16	1-11/16	1-15/16	11-5/8
1-1/2 TON	4-3/4	5-1/8	2-1/2	1-5/16	1-1/4	1-11/16	2-1/16	13-13/16
2 TON	5-7/16	5-11/16	2-1/2	1-5/16	1-3/8	1-13/16	2-5/16	15-3/8
3 TON	4-3/4	6-1/2	3-3/8	1-7/8	1-7/16	2	2-7/16	18-1/2
5 TON	6-5/16	6-11/16	4-7/16	2-5/16	1-9/16	2-1/2	_	22-13/16







LIFTING SYSTEMS

JETTOOLS.COM





L-100 SERIES HAND CHAIN HOISTS



L-100 SERIES HAND CHAIN HOISTS

SAFETY

- Slip clutch style overload protection prevents lifting of damaging loads beyond the rated capacity of the hoist. Overload protection trigger can be reset on site
- Weston-style Double Pawl System splits the load to opposite sides of the ratchet gear for added safety
- Industrial rated alloy steel hooks rotate 360° for easy rigging and slowly stretch to indicate an overload situation
- This product complies with ANSI/ASME B30.16 and HST-2 Standards

DURABILITY

- Grade 100, Zinc-plated load chain provides a smaller, more compact link with a greater working load limit and maximum corrosion resistance
- JET's revolutionary single piece fused brake reduces maintenance and carries a lifetime warranty
- Cast-steel safety latches provide added durability over stamped steel latches and will not bend out of compliance
- Intended for the harshest environments, the heat-treated load plates and case hardened corrosive resistant internal parts extend the life of the hoist and gives industry leading corrosion resistance
- Double sealed ball bearings support the load sheave increasing efficiency by reducing rolling resistance under load, promoting smooth operation
- Impact resistant all steel construction for added durability and protection

VERSATILITY


- Lightweight and smaller body design are ideal for confined areas and low headroom applications
- Load tested to 125% of capacity with certificate



1.400 SERI	NUMBER	(T)	(lbs.)	LIFT (ft.)	HEADROOM (in.)	(dia/mm) X NO. OF FALLS	TO LIFT LOAD 1 FT. (ft.)	TO LIFT CAPACITY	WEIGH (lbs.)
	IES HAND CHAIN H	DISTS WITH OV	ERLOAD PROT	TECTION - 1/4 TON			()		
101200	L-100-250WO-10	1/4	550	10	9-13/16	4 x 1	18	42	10
101225	L-100-250WO-15	1/4	550	15	9-13/16	4 x 1	18	42	12
101250	L-100-250WO-20	1/4	550	20	9-13/16	4 x 1	18	42	14
101223	L-100-250WO-30	1/4	550	30	9-13/16	4 x 1	18	42	16
L-100 SERI	IES HAND CHAIN H	DISTS WITH OV	ERLOAD PROT	TECTION - 1/2 TON					
104100	L-100-50WO-10	1/2	1100	10	11-1/4	5 x 1	25	53	24
205115	L-100-50WO-15	1/2	1100	15	11-1/4	5 x 1	25	53	29
205120	L-100-50WO-20	1/2	1100	20	11-1/4	5 x 1	25	53	29
205130	L-100-50WO-30	1/2	1100	30	11-1/4	5 x 1	25	53	44
L-100 SERI	IES HAND CHAIN HO	DISTS WITH OV	ERLOAD PROT	ECTION - 1 TON					
102100	L-100-100WO-10	1	2200	10	11-5/8	6.3 x 1	43	64	27
203115	L-100-100WO-15	1	2200	15	11-5/8	6.3 x 1	43	64	33
203120	L-100-100WO-20	1	2200	20	11-5/8	6.3 x 1	43	64	39
203130	L-100-100WO-30	1	2200	30	11-5/8	6.3 x 1	43	64	51
L-100 SFRI	IES HAND CHAIN HO	DISTS WITH OV	ERLOAD PROT	ECTION - 1-1/2 TO	N		-		
101100	L-100-150WO-10	1-1/2	3300	10	13-3/4	7.1 x 1	57	77	34
201115	L-100-150WO-15	1-1/2	3300	15	13-3/4	7.1 x 1	57	77	41
201120	L-100-150WO-20	1-1/2	3300	20	13-3/4	7.1 x 1	57	77	48
201130	L-100-150WO-30	1-1/2	3300	30	13-3/4	7.1 x 1	57	77	62
	IES HAND CHAIN H				10 0/1	7.1.8.1	0,		02
105100	I -100-200WO-10	2	4400	10	14-3/4	8 x 1	70	79	44
206115	L-100-200WO-15	2	4400	15	14-3/4	8 x 1	70	79	52
206121	L-100-200WO-13	2	4400	20	14-3/4	8 x 1	70	79	59
206121	L-100-200WO-30	2	4400	30	14-3/4	8 x 1	70	79	75
	IES HAND CHAIN H				14"3/4	0 X 1	70	13	13
106100	L-100-300WO-10	3	6600	10	20-1/8	7.1 x 2	114	79	53
207115	L-100-300WO-10	3	6600	15	20-1/8	7.1 x 2	114	79	64
207113	L-100-300WO-15	3	6600	20	20-1/8	7.1 x 2	114	79	74
207120	L-100-300WO-20	3	6600	30	20-1/8	7.1 x 2	114	79	95
					20-1/0	1.1 % 2	114	19	90
	IES HAND CHAIN HO				00.50		400	70	00
107100	L-100-500WO-10	5	11000	10	23-5/8	9 x 2	198	75	90
208115	L-100-500WO-15	5	11000	15	23-5/8	9 x 2	198	75	105
208120	L-100-500WO-20	5	11000	20	23-5/8	9 x 2	198	75	120
208130	L-100-500WO-30	5	11000	30	23-5/8	9 x 2	198	75	149
	IES HAND CHAIN H								
108100	L-100-1000WO-10	10	22000	10	29-7/8	9 x 4	396	79	174
209115	L-100-1000WO-15	10	22000	15	29-7/8	9 x 4	396	79	200
209120	L-100-1000WO-20	10	22000	20	29-7/8	9 x 4	396	79	227
209130	L-100-1000WO-30	10	22000	30	29-7/8	9 x 4	396	79	279
	IES HAND CHAIN H								
109110	L-100-1500WO-10	15	33000	10	39-3/8	9 x 6	396 x 2	80 x 2	292
109115	L-100-1500WO-15	15	33000	15	39-3/8	9 x 6	396 x 2	80 x 2	330
109100	L-100-1500WO-20	15	33000	20	39-3/8	9 x 6	396 x 2	80 x 2	369
109130	L-100-1500WO-30	15	33000	30	39-3/8	9 x 6	396 x 2	80 x 2	445
L-100 SERI	IES HAND CHAIN H	DISTS WITH OV	ERLOAD PROT	ECTION - 20 TON					
102020	L-100-2000WO-10	20	44000	10	45-1/4	9 x 8	396 x 2	80 x 2	394
108015	L-100-2000WO-15	20	44000	15	45-1/4	9 x 8	396 x 2	80 x 2	447
102000	L-100-2000WO-20	20	44000	20	45-1/4	9 x 8	396 x 2	80 x 2	500
108030	L-100-2000WO-30	20	44000	30	45-1/4	9 x 8	396 x 2	80 x 2	606

L-100 SERIES HOIST DIMENSIONS (IN.)

CAPACITY		В						
1/4 TON	3-3/4	4-5/16	1-3/16	13/16	1-1/16	1-1/4	1-3/8	9-13/16
1/2 TON	5-1/8	5-1/2	1-11/16	1	1-1/16	1-1/4	1-3/8	11-1/4
1 TON	6-3/8	6-5/16	2	1-3/16	1-5/16	1-9/16	1-3/4	11-5/8
1-1/2 TON	6-11/16	7-3/16	2-1/2	1-5/16	1-5/16	1-5/8	1-7/8	13-3/4
2 TON	7-1/4	8	2-1/2	1-5/16	1-7/16	1-13/16	2-1/16	14-3/4
3 TON	6-11/16	9-1/4	4-3/16	2-1/16	1-11/16	2-1/16	2-7/16	20-1/16
5 TON	7-9/16	11-1/8	5-1/4	2-1/2	2	2-3/8	3-1/8	23-5/8
10 TON	7-9/16	14-3/16	10-3/8	3-3/4	2-1/2	3-3/8	_	29-15/16
15 TON	8-11/16	19-3/8	4-5/16	6-1/8	3-1/8	3-15/16	_	39-3/8
20 TON	9-1/16	25-13/16	11-1/4	4-13/16	3-1/4	4 -5/16	_	45-1/4





GUARANTEED RELIABILITY AND DURABILITY

LIFETIME WARRANTY

All JET® hoists are engineered to meet strict tolerances and are constructed with quality materials to ensure they last. JET stands behind these products with industry-leading warranties and support.

ALL STEEL CONSTRUCTION

HEAT-TREATED LOAD PLATES

LOAD CHAIN

CONTRACTOR-GRADE HOISTS

JET® 590 Series Hand Chain Hoists were designed with all steel construction and ensure reliability and durability to perform in light-duty industrial applications. Easily maintained and serviced, the JET® S90 is available in capacities from 1/2 ton to 10 ton and standard lifts of 10, 15, 20, and 30 feet (custom lifts available).

DUAL PAWL WESTON BRAKE

CAST-STEEL SAFETY LATCHES

ALLOY STEEL HOOKS

12 LIFTING SYSTEMS JETTOOLS.COM 13



S90 SERIES HAND CHAIN HOISTS

S90 SERIES HAND CHAIN HOISTS

SAFETY

- Weston-style Double Pawl System splits the load to opposite sides of the ratchet gear for added safety
- Industrial-rated alloy steel hooks rotate 360° and slowly stretch to indicate overloading
- This product complies with ANSI/ASME B30.16 and HST-2

DURABILITY

- Grade 80 load chain is black oxide coated for corrosion-resistance
- Intended for the harshest environments, the heat-treated load plates and case hardened corrosive resistant internal parts extend the life of the hoists and gives industry leading corrosion resistance
- Cast-steel safety latches provide added durability over stamped steel latches and will not bend out of compliance
- Needle bearings support the load sheave increasing efficiency by reducing rolling resistance under load, promoting smooth operation
- Impact resistant all steel construction for added durability and protection

STANDARDS


- Lightweight and compact design are ideal for confined areas and low headroom applications
- Load tested to 125% of capacity with certificate



STOCK NUMBER	MODEL NUMBER	CAPACITY (T)	CAPACITY (lbs.)	STANDARD LIFT (ft.)	HEADROOM (in.)	LOAD CHAIN (dia/mm) X NO. OF FALLS	HAND CHAIN TO LIFT LOAD 1 FT. (ft.)	LBS. OF PULL TO LIFT CAPACITY	WEIGH (lbs.)
S90 SERIE	S HAND CHAIN I	HOISTS - 1/2 TON							
101900	S90-050-10	1/2	1100	10	11	5 x 1	32	58	18
101901	S90-050-15	1/2	1100	15	11	5 x 1	32	58	23
101902	S90-050-20	1/2	1100	20	11	5 x 1	32	58	28
101903	S90-050-30	1/2	1100	30	11	5 x 1	32	58	37
S90 SERIE	S HAND CHAIN I	HOISTS - 1 TON							
101910	S90-100-10	1	2200	10	12	6 x 1	53	60	25
101911	S90-100-15	1	2200	15	12	6 x 1	53	60	30
101912	S90-100-20	1	2200	20	12	6 x 1	53	60	36
101913	S90-100-30	1	2200	30	12	6 x 1	53	60	47
S90 SERIE	S HAND CHAIN I	HOISTS - 1-1/2 TO	N						
101920	S90-150-10	1-1/2	3300	10	14-1/2	8 x 1	57	84	34
101921	S90-150-15	1-1/2	3300	15	14-1/2	8 x 1	57	84	42
101922	S90-150-20	1-1/2	3300	20	14-1/2	8 x 1	57	84	49
101923	S90-150-30	1-1/2	3300	30	14-1/2	8 x 1	57	84	64
S90 SERIE	S HAND CHAIN I	HOISTS - 2 TON							
101930	S90-200-10	2	4400	10	17-1/2	8 x 1	71	91	37
101931	S90-200-15	2	4400	15	17-1/2	8 x 1	71	91	45
101932	S90-200-20	2	4400	20	17-1/2	8 x 1	71	91	52
101933	S90-200-30	2	4400	30	17-1/2	8 x 1	71	91	67
S90 SERIE	S HAND CHAIN I	HOISTS - 3 TON							
101940	S90-300-10	3	6600	10	20-1/2	8 x 2	115	87	54
101941	S90-300-15	3	6600	15	20-1/2	8 x 2	115	87	66
101942	S90-300-20	3	6600	20	20-1/2	8 x 2	115	87	78
101943	S90-300-30	3	6600	30	20-1/2	8 x 2	115	87	102
S90 SERIE	S HAND CHAIN I	HOISTS - 5 TON							
101950	S90-500-10	5	11000	10	23-1/2	10 x 2	178	90	88
101951	S90-500-15	5	11000	15	23-1/2	10 x 2	178	90	107
101952	S90-500-20	5	11000	20	23-1/2	10 x 2	178	90	125
101953	S90-500-30	5	11000	30	23-1/2	10 x 2	178	90	162
S90 SERIE	S HAND CHAIN I	HOISTS - 10 TON							
101960	S90-1000-10	10	22000	10	30	10 x 4	357	96	160
101961	S90-1000-15	10	22000	15	30	10 x 4	357	96	194
101962	S90-1000-20	10	22000	20	30	10 x 4	357	96	228
101963	S90-1000-30	10	22000	30	30	10 x 4	357	96	296

S90 SERIES HOIST DIMENSIONS (IN.)

1/2 TON 5 5-1/8 1-11/16 1 1-1/8 1-5/16 1-3/8 11 5-5/16 6-1/8 2 1-3/16 1-5/16 1-5/8 1-13/16 12 1 TON 1-1/2 TON 6 6-13/16 2-1/2 1-5/16 1-5/16 1-11/16 1-7/8 14-1/2 2 TON 6-3/16 7-5/16 2-1/2 1-5/16 1-1/2 1-13/16 2 17-1/2 3 TON 6-3/16 9-5/16 4 2-3/16 1-11/16 2 2-1/2 20-1/2 7-1/8 10-5/16 5 3 2 2-3/8 3-1/8 23-5/8 7 1/8 | 14 3/8 | 10 3/16 | 3 7/8 | 2 1/2 | 3 5/16 | — | 30







JLH SERIES COMPACT LEVER HOISTS

SAFETY

/....`

LIFETIMI WARRANT

- Weston® brake design with opposing double pawls, splits the load to opposite sides of the ratchet gear for greater load security
- Industrial-rated alloy steel hooks rotate 360° and slowly stretch to indicate overloading

DURABILITY

- Grade 100 load chain is a smaller, more compact link with a greater working load limit and is Zinc plated for maximum corrosion protection
- The 4 pocket chain sprocket provides enhanced chain and lift wheel engagement for reduced vibration and smooth lifting
- Secured with Allen screws and lock nuts, the cast-steel safety latches are more durable than stamped steel latches and will not bend out of compliance with lifting regulations
- Durable, impact resistant, aluminum alloy housings
- The heat-treated load plates and case hardened corrosive resistant internal parts extend the life of the hoist
- Rugged vinyl pouch with belt loops and carrying strap included


STANDARDS

- This product complies with ANSI / ASME B30.21 and HST-3 Standards
- Load tested to 125% of capacity with certificate



JLH SERIES HOIST DIMENSIONS (IN.)

CAPACITY		В							L
1/4 TON	3-7/16	2-11/16	1-3/16	13/16	13/16	1-1/4	1-3/8	7-7/8	5-3/4
1/2 TON	4	3-3/16	1-7/8	1	1	1-3/8	1-5/8	9-13/16	6-5/16



STOCK NUMBER	MODEL NUMBER	CAPACITY (T)	CAPACITY (lbs.)	STANDARD LIFT (ft.)	HEADROOM (in.)	LOAD CHAIN (dia/mm) X NO. OF FALLS	LEVER LENGTH (in.)	LBS. OF PULL TO LIFT CAPACITY	WEIGHT (lbs.)
JLH SERIE	S LEVER HOISTS	6 - 1/4 TON							
181205	JLH-25-5	1/4	500	5	7-7/8	3.2 x 1	5-3/4	45	3.5
181210	JLH-25-10	1/4	500	10	7-7/8	3.2 x 1	5-3/4	45	4.4
181215	JLH-25-15	1/4	500	15	7-7/8	3.2 x 1	5-3/4	45	5.3
JLH SERIE	S LEVER HOISTS	6 - 1/2 TON							
181505	JLH-50-5	1/2	1000	5	9-13/16	4.3 x 1	6-5/16	54	5.5
181510	JLH-50-10	1/2	1000	10	9-13/16	4.3 x 1	6-5/16	54	7.0
181515	JLH-50-15	1/2	1000	15	9-13/16	4.3 x 1	6-5/16	54	8.6

*CUSTOM LIFTS AVAILABLE IN ALL CAPACITIES IN 10 FT INCREMENTS

JLP-A SERIES MINI-PULLERS

SAFETY

- Weston® brake design with opposing double pawls, splits the load to opposite sides of the ratchet gear for greater load security
- Industrial rated alloy steel hooks rotate 360° for easy rigging and slowly stretch to indicate an overload situation

DURABILITY

- Intended for the harshest environments, the heat-treated load plates and case hardened corrosive resistant internal parts extend the life of the hoists and gives industry leading corrosion resistance
- The lightweight design with shorter handle and smaller body are ideal for confined areas and low headroom applications
- Grade 80 load chain is black oxide coated for corrosion resistance
- Impact resistant all steel construction for added durability and protection


STANDARDS

- This product complies with ANSI / ASME B30.21 and HST-3 Standards
- Load tested to 125% of capacity with certificate



JLP-A SERIES HOIST DIMENSIONS (IN.)

CAPACITY		В							
1/4 TON	3-1/8	2-7/16	1-3/4	1	1-3/8	1-1/4	1-3/8	8-1/4	5-15/1
1/2 TON	3-3/4	2-11/16	1-7/8	1	1-3/8	1-3/8	1-5/8	10-1/16	8-7/16



STOCK NUMBER	MODEL NUMBER	CAPACITY (T)	CAPACITY (lbs.)	STANDARD LIFT (ft.)	HEADROOM (in.)	LOAD CHAIN (dia/mm) X NO. OF FALLS	LEVER LENGTH (in.)	LBS. OF PULL TO LIFT CAPACITY	WEIGHT (lbs.)
JLP-A SE	RIES LEVER HOIS	TS - 1/4 TON							
287100	JLP-025A-5	1/4	500	5	8-1/4	4 x 1	5-15/16	60	4.6
287101	JLP-025A-10	1/4	500	10	8-1/4	4 x 1	5-15/16	60	5.8
287102	JLP-025A-15	1/4	500	15	8-1/4	4 x 1	5-15/16	60	7.0
JLP-A SE	RIES LEVER HOIS	TS - 1/2 TON							
287200	JLP-050A-5	1/2	1000	5	10-1/16	4.3 x 1	8-7/16	86	5.2
287201	JLP-050A-10	1/2	1000	10	10-1/16	4.3 x 1	8-7/16	86	6.8
287202	.II P-050A-15	1/2	1000	15	10-1/16	43 x 1	8-7/16	86	8.3

*CUSTOM LIFTS AVAILABLE IN ALL CAPACITIES IN 10 FT INCREMENTS

16 LIFTING SYSTEMS JETTOOLS.COM 17



16 LIFTING STSTEMS



JLH SERIES LEVER HOISTS



JLH SERIES **LEVER HOISTS**

SAFETY

- JET's revolutionary single piece fused brake reduces maintenance and carries a lifetime warranty
- Slip clutch style overload protection prevents lifting of damaging loads beyond the rated capacity of the hoist. Overload protection trigger can be reset on site
- JET's improved easy free chain design is a no-load, two-step free chaining system that permits quicker hoist positioning and take up of slack chain
- Weston-style Double Pawl System splits the load to opposite sides of the ratchet gear for added safety
- This product complies with ANSI / ASME B30.21 and HST-3 Standards

DURABILITY

- Grade 100, Zinc-plated load chain provides a smaller, more compact link with a greater working load limit and maximum corrosion resistance
- Cast-steel safety latches provide added durability over stamped steel latches and will not bend out of compliance
- Intended for the harshest environments, the heat-treated load plates and case hardened corrosive resistant internal parts extend the life of the hoists and gives industry leading corrosion resistance
- Needle bearings support the load sheave increasing efficiency by reducing rolling resistance under load, promoting smooth operation

VERSATILITY


- Redesigned ergonomic grip is secured to the lever arm providing greater operator control and increased comfort
- Advanced offset handle design rotates 360° and allows for extra clearance between the operator's hand and the load chain
- Load tested to 125% of capacity with certificate



STOCK NUMBER	MODEL NUMBER	CAPACITY (T)	CAPACITY (lbs.)	STANDARD LIFT (ft.)	HEADROOM (in.)	LOAD CHAIN (dia/mm) X NO. OF FALLS	LEVER LENGTH (in.)	LBS. OF PULL TO LIFT CAPACITY	WEIGHT (lbs.)
JLH SERI	ES LEVER HOISTS	WITH OVERLOA	D PROTECTIO	N- 3/4 TON					
376100	JLH-75WO-5	3/4	1650	5	11	5.6 x 1	10-1/4	64	13
376101	JLH-75WO-10	3/4	1650	10	11	5.6 x 1	10-1/4	64	15
376102	JLH-75WO-15	3/4	1650	15	11	5.6 x 1	10-1/4	64	18
376103	JLH-75WO-20	3/4	1650	20	11	5.6 x 1	10-1/4	64	20
JLH SERII	ES LEVER HOISTS	WITH OVERLOA	D PROTECTIO	N- 1 TON					
376200	JLH-100WO-5	1	2200	5	11-13/16	5.6 x 1	10-1/4	79	14
376201	JLH-100WO-10	1	2200	10	11-13/16	5.6 x 1	10-1/4	79	16
376202	JLH-100WO-15	1	2200	15	11-13/16	5.6 x 1	10-1/4	79	18
376203	JLH-100WO-20	1	2200	20	11-13/16	5.6 x 1	10-1/4	79	21
JLH SERII	ES LEVER HOISTS	WITH OVERLOA	D PROTECTIO	N- 1-1/2 TON					
376300	JLH-150WO-5	1-1/2	3300	5	13-3/16	7.1 x 1	10-1/4	75	18
376301	JLH-150WO-10	1-1/2	3300	10	13-3/16	7.1 x 1	10-1/4	75	22
376302	JLH-150WO-15	1-1/2	3300	15	13-3/16	7.1 x 1	10-1/4	75	26
376303	JLH-150WO-20	1-1/2	3300	20	13-3/16	7.1 x 1	10-1/4	75	30
JLH SERIE	ES LEVER HOISTS	WITH OVERLOA	D PROTECTIO	N- 2-1/2 TON					
376400	JLH-250WO-5	2-1/2	5500	5	14-3/4	8.8 x 1	10-1/4	82	25
376401	JLH-250WO-10	2-1/2	5500	10	14-3/4	8.8 x 1	10-1/4	82	31
376402	JLH-250WO-15	2-1/2	5500	15	14-3/4	8.8 x 1	10-1/4	82	36
376403	JLH-250WO-20	2-1/2	5500	20	14-3/4	8.8 x 1	10-1/4	82	42
JLH SERII	ES LEVER HOISTS	WITH OVERLOA	D PROTECTIO	N- 3 TON					
376500	JLH-300WO-5	3	6600	5	15-9/16	10 x 1	16-5/16	84	33
376501	JLH-300WO-10	3	6600	10	15-9/16	10 x 1	16-5/16	84	41
376502	JLH-300WO-15	3	6600	15	15-9/16	10 x 1	16-5/16	84	48
376503	JLH-300WO-20	3	6600	20	15-9/16	10 x 1	16-5/16	84	56
JLH SERIE	ES LEVER HOISTS	WITH OVERLOA	D PROTECTIO	N- 6 TON					
376600	JLH-600WO-5	6	13200	5	21-1/4	10 x 2	16-5/16	84	58
376601	JLH-600WO-10	6	13200	10	21-1/4	10 x 2	16-5/16	84	73
376602	JLH-600WO-15	6	13200	15	21-1/4	10 x 2	16-5/16	84	87
376603	JLH-600WO-20	6	13200	20	21-1/4	10 x 2	16-5/16	84	102
JLH SERIE	ES LEVER HOISTS	WITH OVERLOA	D PROTECTIO	N- 9 TON					
376700	JLH-900WO-5	9	19800	5	26-13/16	10 x 3	16-5/16	89	95
376701	JLH-900WO-10	9	19800	10	26-13/16	10 x 3	16-5/16	89	118
376702	JLH-900WO-15	9	19800	15	26-13/16	10 x 3	16-5/16	89	140
376703	JLH-900WO-20	9	19800	20	26-13/16	10 x 3	16-5/16	89	163
JLH SERIE	ES LEVER HOISTS	WITH SHIP YARD	HOOKS AND	OVERLOAD PRO	OTECTION- 1-1/2 TON				
376800	JLH-150-5PSH	1-1/2	3300	5	13-13/16	7.1 x 1	10-1/4	75	18
376801	JLH-150-10PSH	1-1/2	3300	10	13-13/16	7.1 x 1	10-1/4	75	22
376802	JLH-150-15PSH	1-1/2	3300	15	13-13/16	7.1 x 1	10-1/4	75	26
376803	JLH-150-20PSH	1-1/2	3300	20	13-13/16	7.1 x 1	10-1/4	75	30
JLH SERII	ES LEVER HOISTS	WITH SHIP YARD	HOOKS AND	OVERLOAD PRO	OTECTION- 3 TON				
376900	JLH-300-5PSH	3	6600	5	15-9/16	10 x 1	16-5/16	84	34
376901	JLH-300-10PSH	3	6600	10	15-9/16	10 x 1	16-5/16	84	41
376902	JLH-300-15PSH	3	6600	15	15-9/16	10 x 1	16-5/16	84	48
376903	JLH-300-20PSH	3	6600	20	15-9/16	10 x 1	16-5/16	84	56

JLH SERIES HOIST DIMENSIONS (IN.)

CAPACITY									
3/4 TON	5-11/16	4-11/16	2-1/16	1-1/4	1-1/16	1-3/8	1-1/16	11	10-1/4
1 TON	5-11/16	4-11/16	2-1/16	1-1/4	1-1/4	1-11/16	1-1/4	11-13/16	10-1/4
1-1/2 TON	6-3/8	4-15/16	2-11/16	1-3/4	1-3/8	1-11/16	1-3/8	13-3/16	10-1/4
2-1/2 TON	7	5-7/8	3-1/4	1-7/8	1-5/8	1-7/8	1-5/8	14-3/4	10-1/4
3 TON	7-1/2	6-1/4	3-1/4	1-7/8	1-11/16	2	2-7/16	15-9/16	16-5/16
6 TON	7-1/2	8-9/16	4-3/4	2-3/4	2-1/16	2-3/8	3-5/16	21-1/4	16-5/16
9 TON	7-1/2	11-3/4	4-3/4	2-3/4	2-1/2	3-3/8	-	26-13/16	16-5/16



20 LIFTING SYSTEMS

