

CFDPLAS® PTFE Flange Gasket

CFDPLAS offers a wide range of PTFE Flange Gasket which vary in form, size and pressure grade depending on the type of flange required for safety sealing.

PTFE gasket is manufactured by molding method with PTFE suspension resin. Compare with other plastics, PTFE has superior properties against chemicals and temperature.

Because of such excellent properties, PTFE has been widely used as a sealing material.


PTFE Flange Gaskets have many kinds of application methods, it is widely used in petroleum, chemical, electric and steel industry.

Applicable medium includes water, oil, acid solution, alkali solution and almost all chemical materials.

High Corrosion Resistance Stable Physical Characters High-low-temperature Resistance.

PFG - F Type Gasket is a full-faced gasket with the same outside diameter as the flange and precision bolt holes.

PFG - R Type Gasket is made to fit the raised face portion of the flange only, as there are no bolt holes in the gasket.

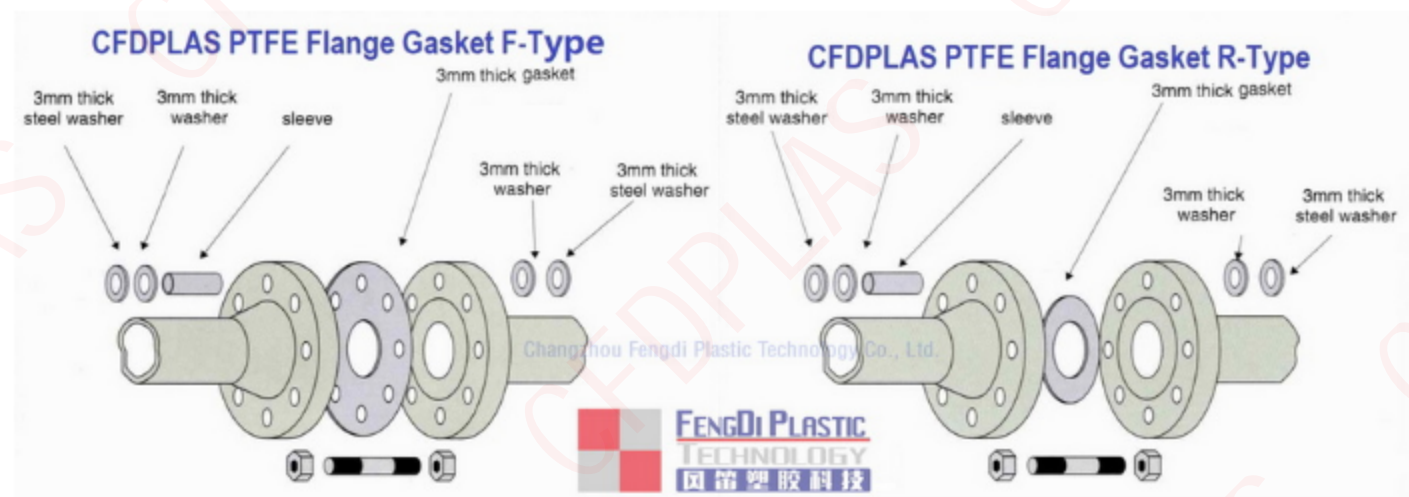

Specification

Item	Unit	Properties Data
Density	g/cm ³	2.10 ~ 2.30
Tensile strength(min)	MPa	≥ 15.0
Ultimate elongation(min)	%	≥ 150
Thickness	mm	0.1-10
Diameter	mm	≤ 3000
Color	Natural, Black, Blue, customized color	
Available Flange Standard	ASME B16.21/EN1514-1/JIS B2404/GBT 912/ DIN/ ANSI	



CHANGZHOU FENGDI PLASTIC TECHNOLOGY CO., LTD.

Add: RM. 111, BLDG. 2, YUKUN MEICHENG B.L.D.G., NO. 20 GEHU MIDDLE ROAD, HUTANG TOWN, WUJIN DISTRICT,
 CHANGZHOU CITY, JIANGSU PROVINCE, CHINA,
 TEL: +86 519 85265682 FAX: +86 519 85269852 POST CODE: 213161
<http://www.cube-bag.com> <https://www.bagpipechina.com> Mobile: +86 13775092566
 Email: cfplplas@foxmail.com sales@bagpipechina.com <http://www.cubecan.com>
cubitainer@sohu.com