

船用钢索卷车

Marine tightwire reel

CB/T3468-1992


本产品适用于各种船舶存放钢索之用。 This product can be used for storage of steel wires on various kinds of ships.
 本产品不适用于拖带和绞缆。 This product can not be used for ship towage or as a warping winch.

系列参数 Parameters

名称 Name	型式 Type	型号 Model		最大钢索直径 Max. diameter of tightwire	最大钢索长度 Max. length of tightwire
A型钢索卷车 (W为无摇手柄) Model A tightwire reel (W means without handle)	AW. A	AW13	A13	13.0	120
		AW17	A17	17	190
		AW21	A21	20.5	180
		AW26	A26	36.0	190
		AW32	A32	32	190
B型钢索卷车 Model B tightwire reel	B	B39		39.0	210
		B48		47.5	230
C型钢索卷车 Model C tightwire reel	C	C56		56	300


AW型无摇手柄钢索卷车

Model AW tightwire reel without handle

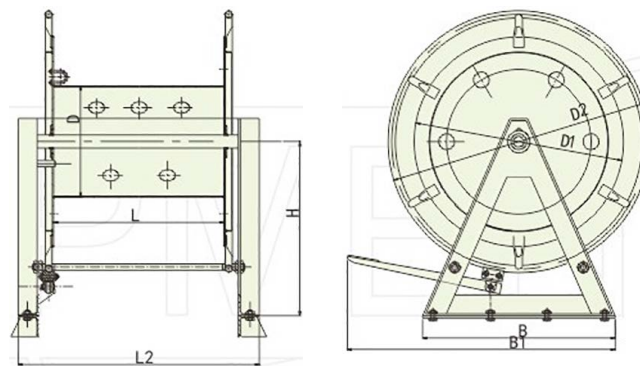

A型钢索卷车

Model A tightwire reel

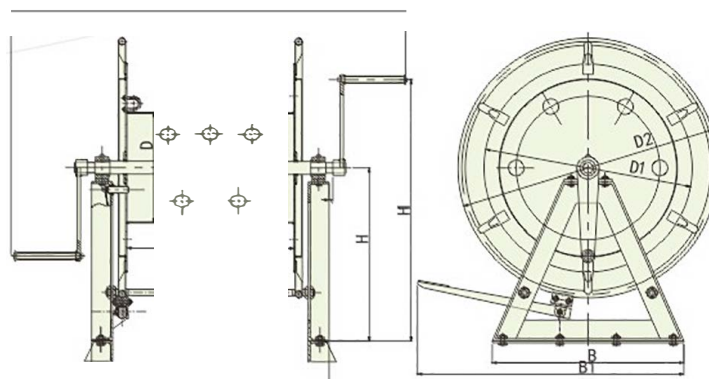


型号 Model	最大钢索直径 Max. diameter of tightwire	D	L	L2	L3	B	B1	H	H1	H2	底脚螺栓 Foundation bolt		重量Kg Weight Kg
											螺纹直径 Thread diameter	数量 Quantity	
AW13	13.0	170	350	584	-	560	-	420	685	-	M16	6	58
A13					1164					670			69
AW17	17	230	450	684	-	620	925	495	830	-	M16	8	76
A17					1284					745			86
AW21	20.5	280	500	770	-	650	945	535	915	-	M16	8	113
A21					1340					875			118
AW26	26.0	340	550	820	-	695	972	610	1040	-	M16	8	122
A26					1425					950			134
AW32	32	425	650	920	-	740	1024	665	1165	-	M16	8	162
A32					1510					1510			172

注：(1) AW13型、A13型的不装刹车；(2) L3为近似值。

Note: (1) Model AW13 and Model A13 are designed without braking device.

(2) L3 is a approximate value.

c型钢索卷车
Model C tightwire reel

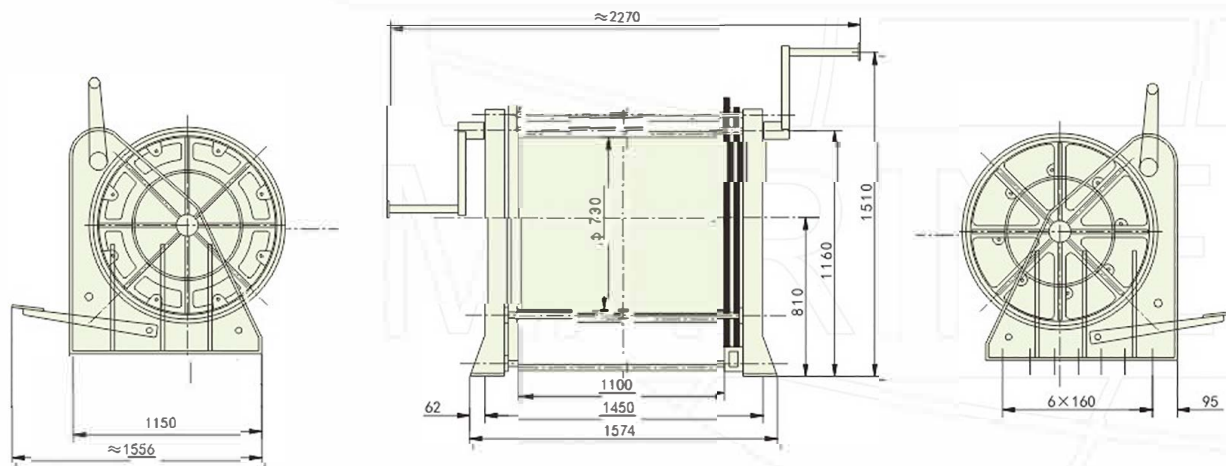

型号 Model	最大钢索直径 Max. diameter of tightwire	齿轮模数 (个) Gear module	大齿轮齿数 (个) Number of teeth of large gear	小齿轮齿数 (个) Number of teeth of small gear	底脚螺栓 Foundation bolt		重量Kg Weight Kg
					螺纹直径 Thread diameter	数量(个) Quantity	
C56	56	10	134	18	M24	14	643.75

标记示例

最大钢索直径为47.5mm的B48型钢索卷车：

卷车 B48 CB/T3468-1992

Example of designation

Model B48 tightwire reel, the max. diameter of tightwire is 47.5mm:

Reel B48 CB/T3468-1992