
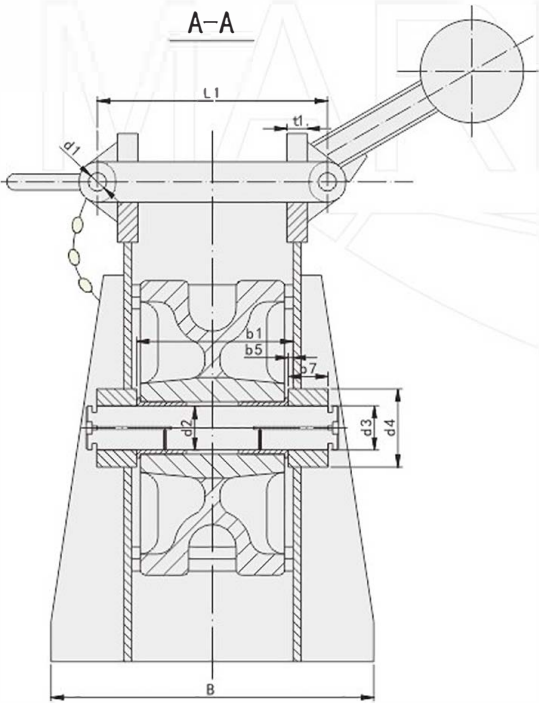


滚轮闸刀掣链器

Roller dog type chain cable stopper

CB/T3844-2000

本产品适用于锚链直径为42~132mm的1、2、3级锚链用掣链器。
This product can be used as a chain stopper for one-stage, two-stage and three-stage anchor chains in diameter of 42-132mm.

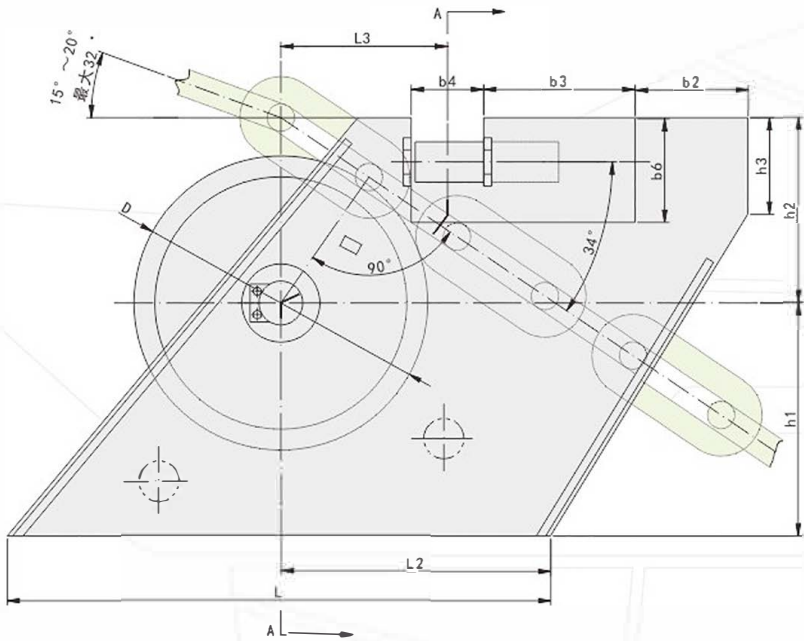

公称直径 Nominal diameter	锚链直径 Diameter of anchor chain	L	L2	D	b1	b3	h1	h2	t	重量 weight Kg
44	42~44	1000	400	484	260	240	392	281	12	274
48	46~48	1050	450	528	286	266	414	306	13	351
52	50~52	1100	500	572	310	290	440	338	14	451
56	54~56	1150	550	600	316	296	460	354	15	536
60	58~60	1200	570	620	330	310	490	378	16	651
64	62~64	1250	600	640	346	326	520	400	17	753
68	66~68	1300	640	680	372	350	540	420	18	939
73	70~73	1350	670	730	400	376	580	460	20	1178
78	76~78	1400	700	780	425	399	630	490	22	1422
84	81~84	1460	740	840	454	426	670	530	24	1758
90	87~90	1540	780	900	484	454	720	570	26	2171
95	92~95	1600	820	950	508	476	760	610	28	2567
102	97~102	1680	870	1020	540	506	800	650	30	2755
107	105~107	1750	900	1070	569	533	860	690	32	3640
114	111~114	1820	940	1140	598	560	910	740	34	4302
122	117~122	1880	1010	1220	632	592	980	790	36	5326
132	124~132	1960	1080	1320	674	632	1060	860	38	6244

注：1、重量值按高度h1计算；
2、h1的安装高度也可由选用者在订货时决定，当其选用高度超过h1时应在侧面作相应的加强。
Note: 1. The weight is to be calculated by the height h1.
2. the installation height h1 can also be determined by the customer during purchase, but it must be reinforced in the side, if the selected height is more than h1.

标记示例
适用于锚链直径70~73mm的掣链器标记为：
掣链器 73 CB/T3844-2000
Example of designation
Chain stopper for anchor chains in diameter of 70-73mm is to be designated as:
Chain cable stopper 73 CB/T3844-2000