


带缆桩
BOLLARD

GB/T554-1996

本产品适用于船舶的停泊系统。产品满足于ISO3913-1977和日本JIS F200-1975。
THIS PRODUCT CAN BE USED FOR BERTHING AND MOORING OF SHIPS.THE PRODUCT MEETS
ISO3913-1977 AND JAPANESE STANDARD JISF200-1975.


A型 - 普通带缆桩

MODEL A COMMON BOLLARD BITT

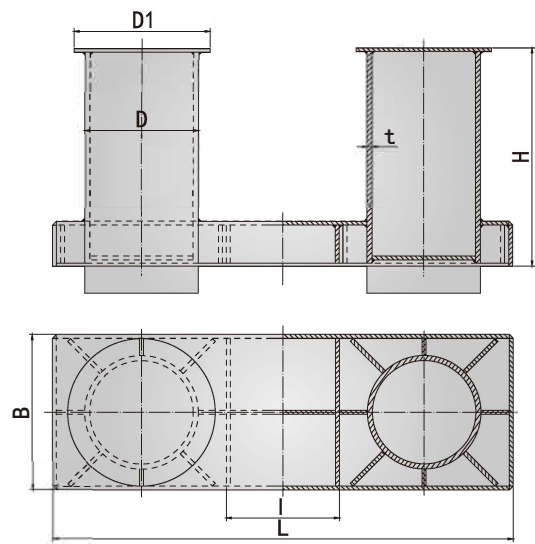

B型 - 嵌入带缆桩

MODEL B INSERT BOLLARD BITT

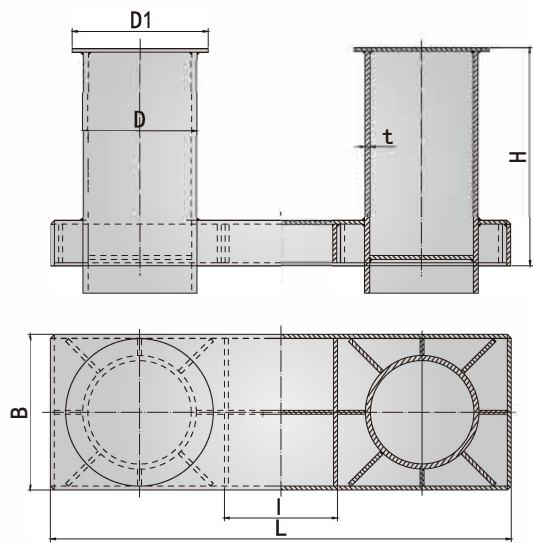


公称直径 Nominal diameter	缆索破 断负荷 Frachure load of cable KN	适用缆索最大直径（周长） Max.diameter of suitable cable (perimeter)					主要尺寸 Main size				A	重量 Weight KG	H ₁ 铺木 甲板时 Wooden deck
		钢索Tightwire			麻索周长 Rope girth	合成索 直径 Complex rope diameter	D	L	B	H			
		6X24	6X30	6X37									
100	29	7.4	8.7	—	63	14	114	445	165	150	250	19	—
125	39	9.3	8.7	8.7	75	18	140	540	195	190	315	29	—
160	49	9.3	11.0	8.7	90	20	168	670	225	250	400	45	310
200	78	13.0	13.0	13.0	110	26	219	860	290	300	500	80	360
250	118	15.0	17.5	5.0	130	30	273	1065	360	380	630	141	440
315	196	20.5	21.5	19.5	170	39	325	1300	430	480	800	264	540
355	255	24.0	24.0	21.5	200	45	351	1475	480	530	890	358	590
400	314	26.0	28.0	24.0	235	53	402	1630	550	600	1000	499	660
450	382	30.0	30.0	28.0	250	56	450	1840	620	680	1130	680	740
500	451	32.0	32.5	30.0	280	64	508	2040	690	750	1250	911	810
560	549	33.5	36.5	32.5	315	70	560	2240	750	830	1380	1208	—
630	686	37.5	39.0	36.5	345	77	610	2510	820	940	1570	1601	—
710	804	41.0	43.0	39.0	375	84	712	2840	960	1050	1750	2252	—
800	981	44.5	47.5	43.0	—	—	813	3240	1100	1200	2000	3071	—

- 注:
- 1) B型嵌入式带缆桩规格由公称直径160~500.H1无木甲板时减60mm。
 - 2) 如订货者要求, 可安装挡板。

C型 - 带缆桩


MODEL C BOLLARD BITT

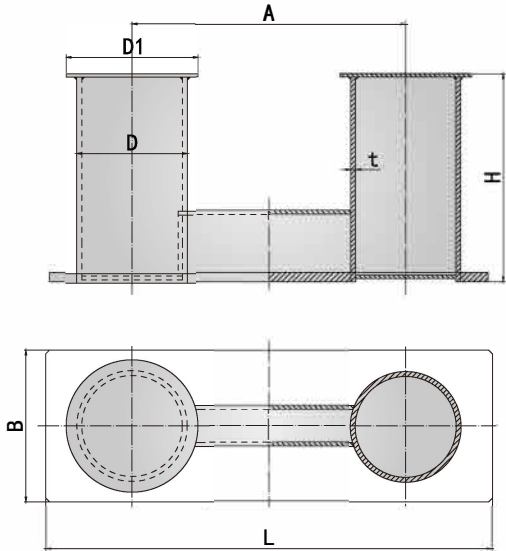

公称直径 Nominal diameter	钢索最 大直径 Max. diameter of tightwire	麻索最 大直径 周长 Max. Rope girth	D	L	B	H	重量 Weight KG
50	8.7	75	50	310	100	115	4.5
75	11.5	90	75	430	125	170	10.8
100	13.5	100	100	540	160	220	18.6
125	15.5	125	125	676	200	275	34.3
150	17.5	150	150	800	230	330	49.0

D型 - 带缆桩


MODEL D BOLLARD BITT

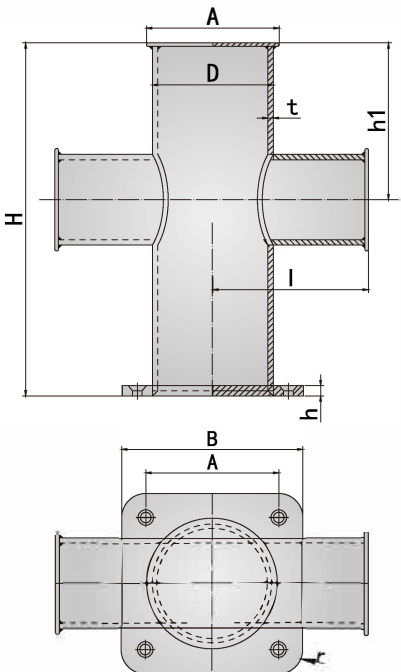

公称直径 Nominal diameter	钢索最 大直径 Max. diameter of tightwire	麻索最 大直径 周长 Max. Rope girth	D	B	H	A	螺钉直径 Screw diameter	重量 Weight KG
50	8.7	75	50	135	190	85	M16	2.8
75	11.5	90	75	185	290	135	M22	8.0
100	13.5	100	100	235	350	160	M27	15.0

E型 - 双十字带缆桩

MODEL E DOUBLE-CROSS BOLLARD BITT

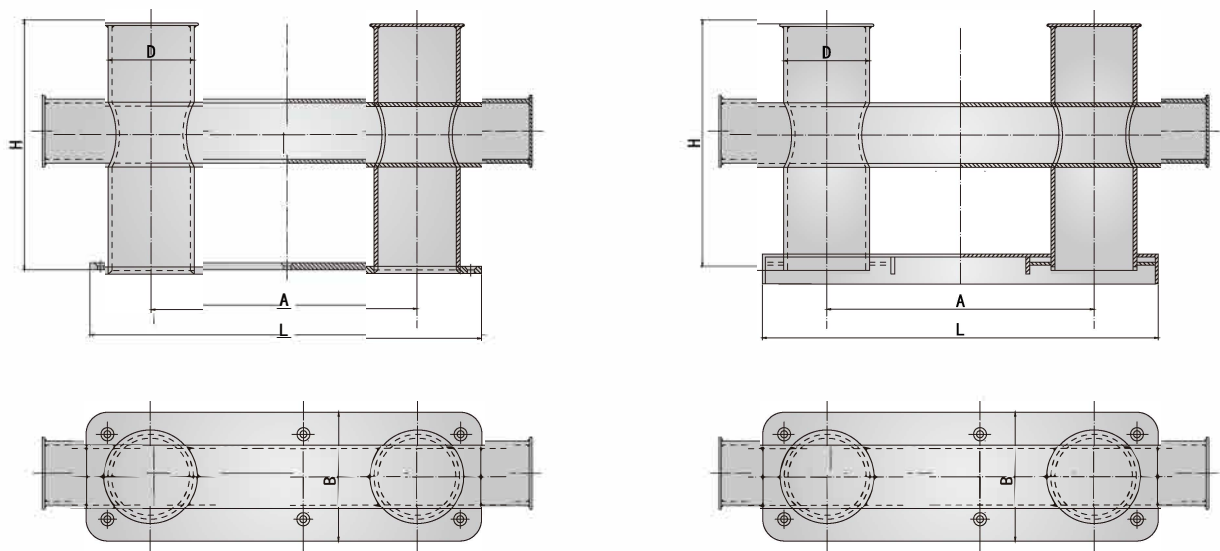

公称直径 Nominal diameter	钢索最大直径 Max. diameter of tightwire	麻索最大直径 周长 Max. Rope girth	D	L	A	B	H	螺钉 Screw		重量 Weight KG
								螺纹直径 Diameter of screw thread	数量 Quantity	
50	8.7	75	50	310	180	130	190	M12	6	7
75	11.5	90	75	450	275	170	290	M16	6	16
100	13.5	100	100	550	350	200	350	M18	6	27
125	15.5	125	125	660	425	240	425	M22	6	49
150	17.5	150	150	770	500	270	500	M22	6	71
175	19.5	175	180	850	530	320	550	M24	6	103
200	22.5	200	203	960	600	360	795	—	—	181
250	26.0	225	245	1200	750	450	855	—	—	310
300	30.5	250	299	1440	900	540	1160	—	—	576

标记示例

公称直径为200mm的普通(A) 型带缆桩：带缆桩A200 CB/T554-1996

公称直径为200mm的嵌入(B) 型带缆桩：带缆桩B200 CB/T554-1996

公称直径为200mm的双十字(E) 型带缆桩：带缆桩E250 CB/T554-1996

Example of designation:

Common (Model A)in nominal diameter of 200mm:bollard bitt A200 GB/T554-1996

Insert(Model B)in nominal diameter of 200mm:bollard bitt B200 GB/T554-1996

Double-cross(Model E)in nominal diameter of 250mm:bollard bittE250 GB/T554-1996