


导缆滚轮 ROLLER FOR FAIRLEAD

CB*58-1983

本产品仅适用于导系船缆索。

THIS PRODUCT CAN ONLY BE USED FOR CABLE LEADING OF SHIPS.

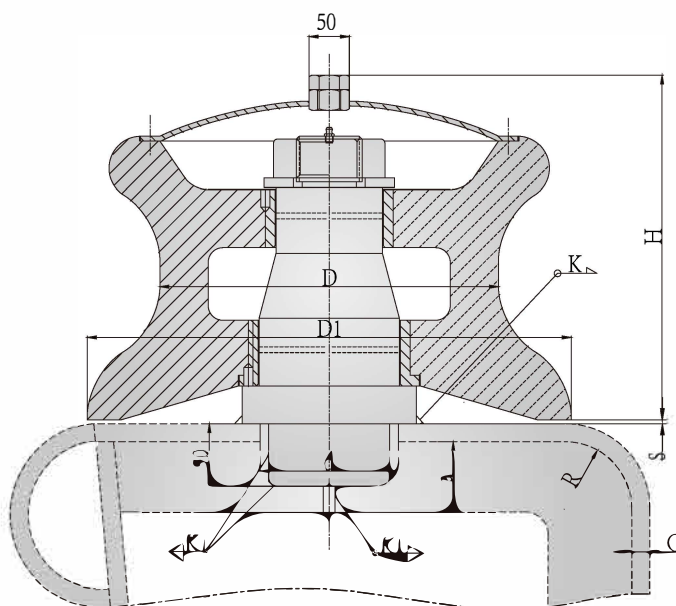

滚轮直径 Wheel diameter D	适用缆索最大直径（参考） Max.diameter of suitable cable(for reference)					基座尺寸（参考）Basic size (for reference)								外形尺寸 External size			重量Kg Weight	
	钢索GB 1102-74抗 拉强度为（155kg/mm2） Resistance wire GB 1102-1102 Tensile strength (155 KGF/mm2)			麻索 Rope	合成纤维索 Complex fiber rope	a	b	c	c1	d	R	K	K1	D1	H	S	铸铁 Cast iron	铸钢 Cast steel
	6X24	6X30	6X37															
100	11	11	11	40	28	60	125	8	6	48	30	5	5	160	128	3	9.4	9.9
150	17	17.5	15	45	32	75	190	12	8	71	40	9	7	240	211	3	32.1	33.8
200	22.5	21.5	19.5	55	40	85	230	14	10	95	40	10	8	310	251	3	64.6	68
250	24	26	24	65	45	100	265	14	10	107	40	10	8	380	298	4	108	114
300	30	32.5	28	70	50	100	320	16	14	127	60	13	10	440	321	4	159	168
350	37.5	39	34.5	75	55	100	350	18	14	144	60	13	10	500	346	4	235	348
400	41	39	39	85	65	100	380	20	16	161	60	14	12	560	371	5	336	355
450	44.5	47.5	43	—	80	100	410	20	16	180	60	14	12	620	394	5	413	462

标记示例

滚轮直径D为150mm的铸铁导缆滚轮:

导缆滚轮 150HT CB*58-1983