


羊角单滚轮导缆器

Single Pedestal roller fairlead

CB*436-2000

本产品适用于各类船舶的系船索导向
This product applies to cable (hawser) leading of various kinds of ships.

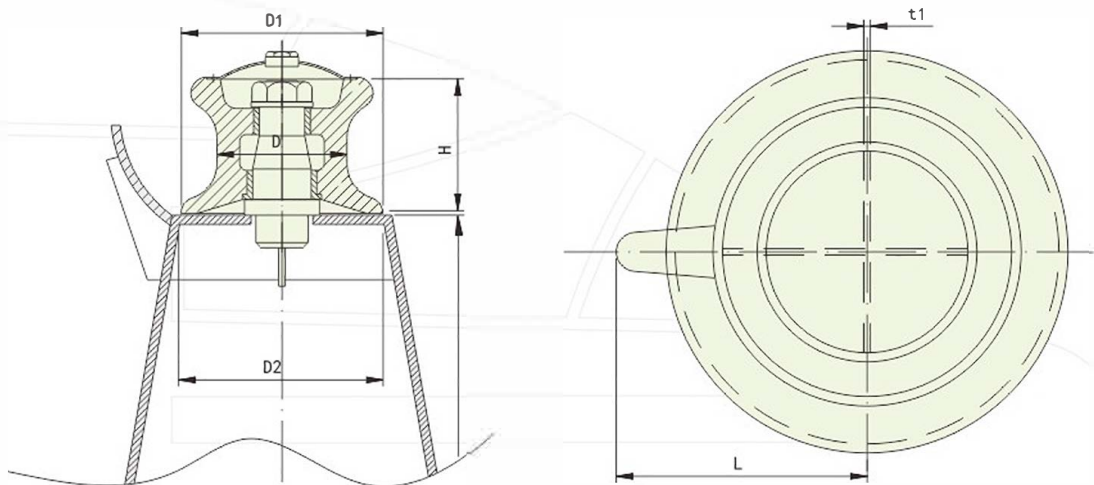

滚轮 直径 Wheel diameter D	适用缆索最大直径(参考) Max. diameter of suitable cable (for reference)				外形尺寸 External size														重量Kg Weight	
	合成 纤维 索 Complex fiber rope	麻索 Rope	钢索(GB/T8918抗 拉强度为1570MPa) Ultimate tensile strength of tightwire 1570Mpa		a	D ₁	D ₂	D ₃	D ₄	H	H ₁	K	K ₁	L	S	t	t ₁	导缆 滚轮 Cable chock wheel	基座 Base	
			6×24	6×37																
100	28	40	11.0	11.0	60	160	48	40	176	128	35	5	5	60	3	8	6	9.9	63.9	
150	32	45	16-18	14-16		240	71	60	264	211	40	9	7	75		12	8	33.8	129.0	
200	40	55	22.0	20.0		310	95	80	338	251	50	10	8	85		14	10	68.0	178.0	
250	45	65	24.0	24.0	80	380	107	90	408	298	60	13	10	100	4	16	14	114.0	207.0	
300	50	70	30.0	28.0		440	127	110	472	321	65							168.0	265.4	
350	55	75	38.0	34.0		500	144	125	536	346	65							248	332.0	
400	65	85	40-42	38-40	100	560	161	140	600	371	70	14	12	120	5	20	16	355.0	401.3	
450	80	-	44.0	42-44		620	180	155	660	394	90							452.0	445.4	
注：基座重量是指基座高h=1000时重量 Note: The base weight is refers to when base high h=1000																				

标记示例
滚轮直径D=450mm，基座高度h=1000的A型导缆器标记为：
导缆器 A450-1000 CB/T436-2000
滚轮直径D=450mm，基座高度h=1000的B型导缆器标记为：
导缆器 B450-1000 CB/T436-2000

Example of designation:
Model A fairlead with rollers in diameter of D=450mm and a base plate in height of h=1000 is to be designated as:
Fairlead A450-1000 CB/T436-2000
Model B fairlead with rollers in diameter of D=450mm and a base plate in height of h=1000 is to be designated as:
Fairlead B450-1000 CB/T436-2000