


A60防火矩形窗

A60 fireproof rectangular window

适用于各类船舶闪点小于60℃的油船，钻井平台，液化气船和化学品船等。

It is applied to various types of tankers carrying oil with flash point of 60 °C, drilling rigs, LPG carriers and chemical carriers etc.

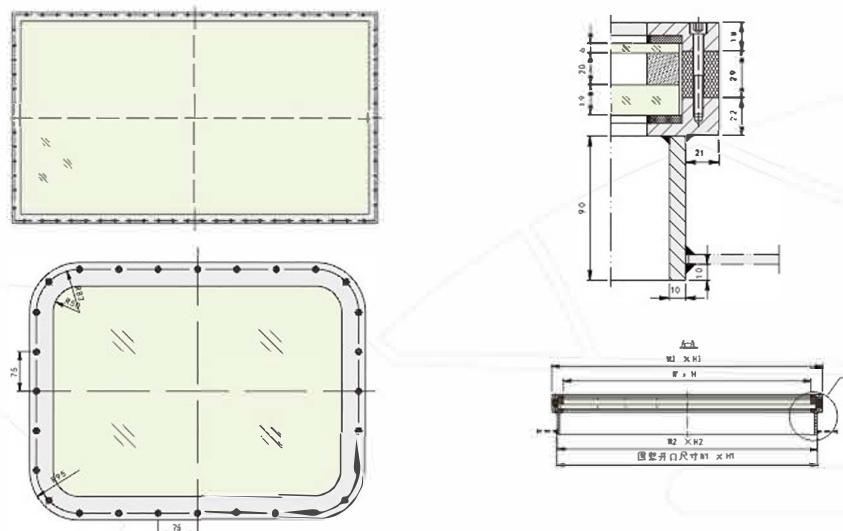

公称尺寸 Nominal size W × H	围壁开孔尺寸 Opening size of casing wall W1 × H1	压框尺寸 Size of frame W2 × H2	外形尺寸 Size of outline W3 × H3	重量KG Weight	
				E	F
355 × 500	435 × 580 (R115)	429 × 574	479 × 624 (R70)	54	53
400 × 500	480 × 640 (R165)	474 × 634	524 × 684 (R120)	62	60
450 × 630	530 × 710 (R165)	524 × 704	574 × 754 (R120)	64	62
500 × 700	580 × 780 (R165)	574 × 774	624 × 824 (R120)	75	67
560 × 800	640 × 880 (R165)	634 × 874	684 × 924 (R120)	94	88
900 × 630	980 × 710 (R165)	974 × 704	1024 × 754 (R120)	111	98
1000 × 710	1080 × 790 (R165)	1074 × 784	1124 × 834 (R120)	145	134
1100 × 800	1180 × 880 (R165)	1174 × 874	1224 × 924 (R120)	150	138
1200 × 800	1280 × 880 (R165)	1274 × 874	1324 × 924 (R120)	163	151
1500 × 800	1580 × 880 (R165)	1574 × 874	1624 × 924 (R120)	203	188
1800 × 900	1880 × 980 (R165)	1874 × 974	1924 × 1024 (R120)	250	237
1600 × 1200	1680 × 1280 (R165)	1674 × 1274	1724 × 1324 (R120)	296	280

标记示例

透光尺寸为900 × 630mm的A60级防火矩形窗

A60矩形窗900 × 630 261WHL059X-00

Example of designation:

A60 fireproof rectangular window in clear sizes of 900×630mm:

A60rectangular window900×630 261WHL059X-00