


A60耐压防火水密舱口盖

A60 fireproof watertight cover

A型-A60耐压防火水密舱口盖


Model A A60 pressure ant resist fireproof watertight cover

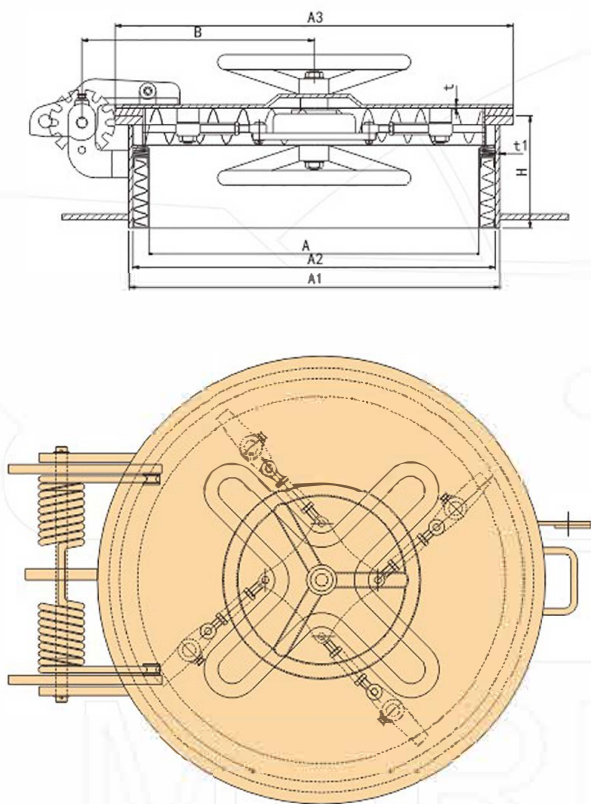

通孔尺寸 Clear size of opening A	甲板开孔 Deck opening A1	围板内径 Inside dia of hatch A2	盖板外径 Out dia of cover A3	盖板厚度 Cover plate thickness t	围板 Coaming		中心距 Central space B	重量 Weight Kg
					厚度t1 Thickness	高度H Height		
600	640	670	720	12	12	200	473	245
650	690	720	770				498	266
700	740	770	820				523	285
750	790	820	870				548	306
800	840	870	920				573	328

注：围板高度H可根据需要确定，表中H为最小尺寸。
Note : coaming height H can be decided as required, H value in the table is the minimum size.

B型-A60耐压防火水密舱口盖
Model B A60 pressure ant resist fireproof watertight cover

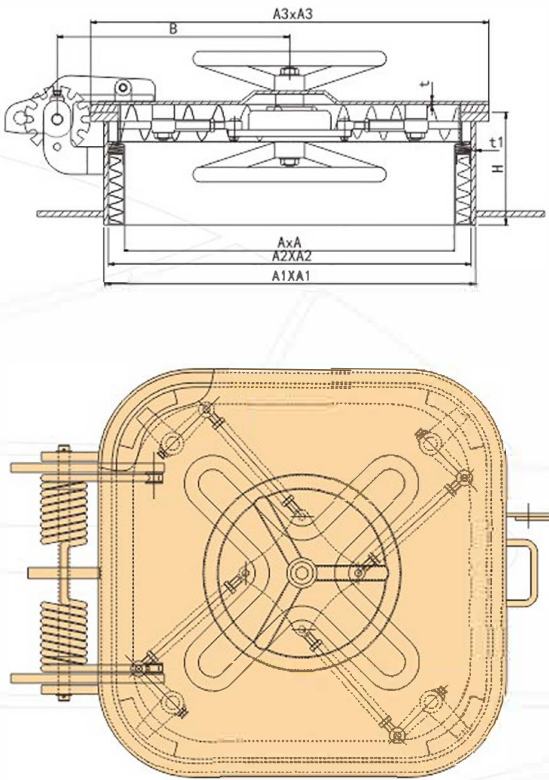

通孔尺寸 Clear size of opening A	甲板开孔 Deck opening A1	围板内径 Inside dia of hatch A2	盖板外径 Out dia of cover A3	盖板厚度 Cover plate thickness t	围板 Coaming		中心距 Central space B	重量 Weight Kg
					厚度t1 Thickness	高度H Height		
600×600	640×640	670×670	720×720	12	12	200	510	310
700×700	740×740	770×770	820×820				560	340
800×800	840×840	870×870	920×920				610	380

注：围板高度H可根据需要确定，表中H为最小尺寸。
Note : coaming height H can be decided as required, H value in the table is the minimum size.