

CFDPLAS® DIN51mm Vented Screw Caps

CFDPLAS[®] Vented Caps provide excellent chemical stability and they are suitable for packaging of dangerous goods.


Applications are standardized industrial containers, e.g. bottles, canisters, barrels, drums, Jerry cans. They are available with different sealing rings or disks (EPE, rubber, PVC, PTFE).

Benefits

- ❑ Allow continuous pressure release
- ❑ Tamper-proof, tamper-evidence ring molded on
- ❑ Prevent swelling, bursting or collapsing of containers
- ❑ Allow quick re-ventilation after contact with fluids
- ❑ Provide excellent chemical stability
- ❑ Available with different sealing rings or disks

Applications

Packaging of Industrial chemicals, Bleaches, Peroxides, Fertilizers, Swimming-pool chemicals, Pesticides, Sterilizers, Disinfectants and so on.

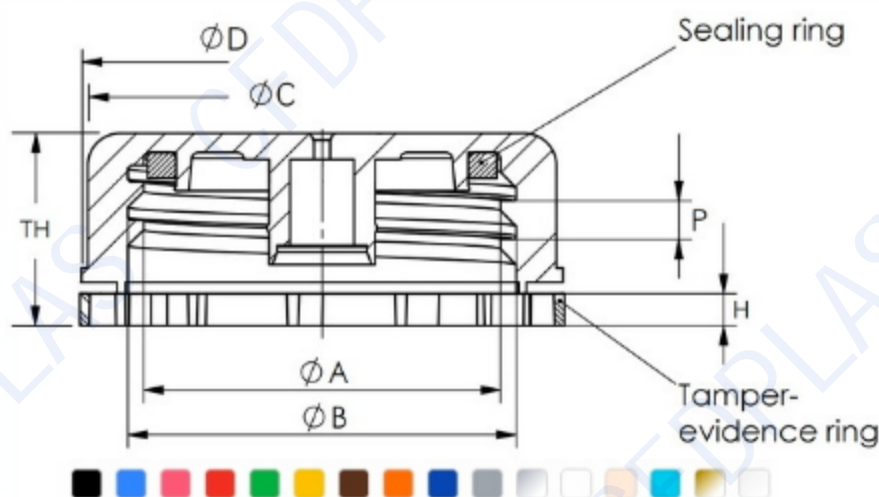

Screw Cap Model No.	Gasket Ring	Materials	Dimensions LxWxH (mm)	Packing PCS/CTN
CFD-VCP-5105-01	Silicone Gasket	HDPE	590x415x345	800
CFD-VCP-5105-02	PE Foamed Ring	HDPE	590x415x345	800
CFD-VCP-5105-03	PVC Sealing Ring	HDPE	590x415x345	800

Attribute	Content
Thread Diameter Max. Ø B - mm	54.80 ± 0.10
Thread Diameter Min. Ø A - mm	50.20 ± 0.10
Pitch of Threads P - mm	5.0
Total Height of Cap TH - mm	26.5 ± 0.3
Net Weight - g	20 ± 0.5
Construction Material	High Density Polyethylene (HDPE)
Cap Outer Diameter Ø D / Ø C - mm	67.3 / 57.4
Tamper-Evident (T/E) Ring	Yes, H : 6.5 mm, Molded on
Color of Vented Cap	Red,Blue,Yellow,Natural,Customized
Gasket Ring	Silicone/PVC/EPE

