



Globus Marine Co
F I L I P P A K I S



Qlight

[Explosion Proof](#)
[Signal Beacons](#)

SPNA Series

Explosion Proof
Electronic Sounder
Max.118dB

- Various sound tones can be selected; warning sound, alarm, melody
- Aluminum housing provides excellent durability
- Sound volume : Max. 118dB at 1m (Volume adjustable)
- Standard housing color : MUNSELL No. 7.5BG 7/2
- Cable entry : 1/2" NPT
- Materials : Housing-Al, Protection cage-STS316L

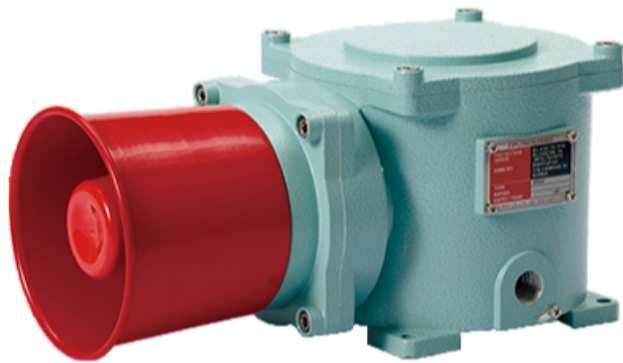

Certificates

IECEX, ATEX, NEPSI, KCs, CCS, CCC, TS

Protection rating

- IECEX - Ex db IIC T6 Gb, IP66
- ATEX - <Ex>II2G Ex db IIC T6 Gb, IP66
- NEPSI, CCC - Ex db IIC T6 Gb, IP66
- KCs - Ex d IIB+H2 IP66 T6(SPNA)
 - Ex db IIC T6 Gb(SPNAKC)
 - Ex tD A21 IP65 T85°C(SPNAKC)
- TS - Ex db IIC T6 IP66 Gb



SEA Series

Bulb Revolving Signal
Beacon

- Large explosion proof warning/ signal lights with excellent visibility for long distance
- Aluminum housing provides excellent durability
- Integrated housing and terminal box model
- Usable voltage AC120V: AC110V-120V, AC230V: AC220V-230V
- Housing standard color : MUNSELL No. 7.5BG 7/2
- Cable entry : 1/2" NPT

Certificates

IECEX, ATEX, NEPSI, KCs, CCS, CCC, TS

Protection rating


- IECEX - Ex db IIC T6 Gb, IP66
- ATEX - II2G Ex db IIC T6 Gb, IP66
- KCs - Ex d IIC T6 IP66
 - Ex tD A21 IP66 T85°C
- NEPSI, CCC - Ex db IIC T6 Gb
- TS - Ex db IIC T6 IP66 Gb



SESA Series

Revolving Signal Beacon
& Electronic Sounder
Combination Max.118dB

- Large explosion proof signal beacon / light & electronic sounder combinations
- Integrated housing and terminal box model
- Excellent diffusion effect with special multifaceted reflector
- Revolving speed : 120-140RPM
- Standard housing color : MUNSELL No. 7.5BG 7/2
- Cable entry : 1/2" NPT
- Materials : Lens-Tempered glass, Filter-PC, Housing-Al, Protection cage-STS316L, Reflector-PC
- Voltage AC120V: AC110V-120V, AC230V: AC220V-230V



Certificates

IECEX, ATEX, NEPSI, KCs, CCS, CCC

Protection rating

- IECEX - Ex db IIC T6 Gb
- ATEX - II2G Ex db IIC T6 Gb
- KCs - Ex d IIB+H2 IP66 T6
- NEPSI, CCC: Ex db IIC T6 Gb, Ex tb IIIC T80°C Db



Contact Us

What type of inquiry do you have?

Product Inquiry