


船用导缆滚轮 MARINE ROLLER FOR FAIRLEAD

GB/T10105-1988

本产品仅适用于导系船缆索。

THIS PRODUCT CAN ONLY BE USED FOR CABLE LEADING OF SHIPS.

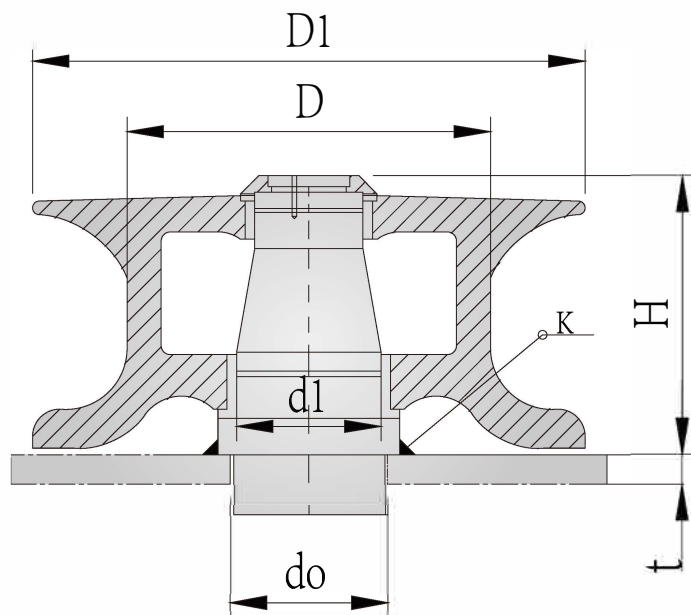

滚轮直径 Wheel diameter D	适用缆索最大直径（参考） Max.diameter of suitable cable(for reference)				外形尺寸 External size						重量Kg Weight
	合成纤维索 Complex fiber rope	麻索 Rope	钢索GB 1102-74抗 拉强度为（155kgf/mm2） Resistance wire GB 1102-1102 Tensile strength (155 KGF/mm2)		D1	d0	d1	H	t	k	
			6X24	6X37							
150	32	45	17	15	240	90	79	154	12	9	24.8
200	40	55	22.5	19	310	115	99	186	14	10	49.3
250	45	65	24	24	380	135	119	230	14	10	92
300	50	70	30	28	440	155	129	255	16	12	127
350	55	75	37.5	34	500	175	149	271	18	13	168
400	65	80	41	39	560	185	159	307	20	14	252
450	80	—	44.5	43	630	210	179	316	20	14	310

标记示例

滚轮直径D为150mm的铸铁导缆滚轮:

导缆滚轮 150 GB/T10105-1988