


铝质中空玻璃隔声窗



CB/T3917-1999

Aluminum sound proof window with double glazing

本产品适用于各种舰船上需要隔声、隔热、保温要求的舱室。
Used for the cabin which needs soundproof, heat insulation and keeping temperature.

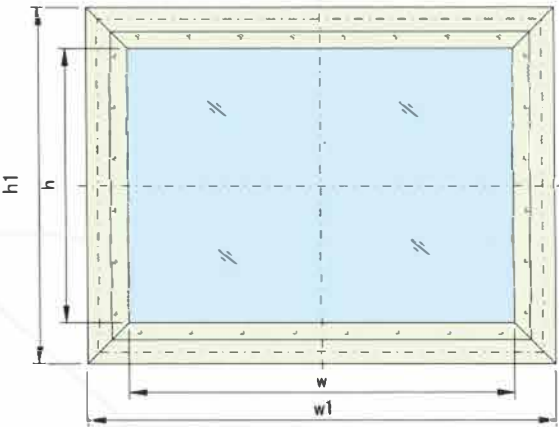

型号 Model	玻璃名称 Name of glass pane
G	钢化玻璃 Toughened glass pane
P	平板玻璃 Plate glass pane
J	夹层玻璃 Sandwich glass pane
C	茶色钢化玻璃 Tinted toughened glass pane

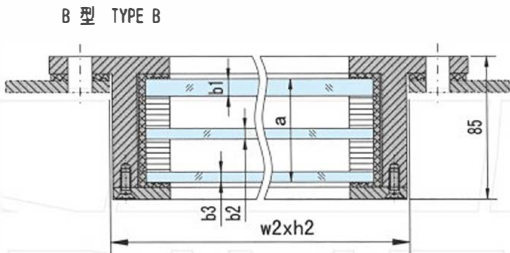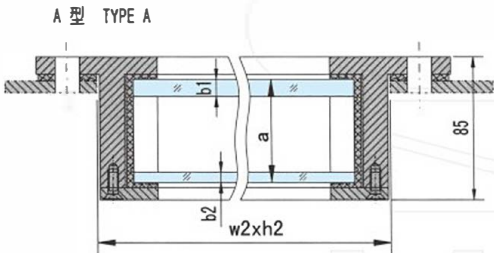

公称尺寸 Nominal size w×h	外形尺寸 Outline size w1×h1	围壁开口 Size of opening w2×h2	玻璃厚度 Glass thicd				窗框螺钉 Install bolt		隔声量 TL(db)		重量Weight Kg	
			a	b1	b2	b3	个数 QTY	直径 DIM	A	B	A	B
500×710	640×850	570×780	60	6	6	6	22	M12	≥30	≥31.3	25.86	31.21
900×630	1040×770	970×700					26		≥31.8		35.48	43.97
1000×800	1140×940	1070×870		8			32		≥35	≥37.1	49.23	61.23
1200×800	1340×940	1270×870					34		≥34		56.87	71.27
1400×800	1540×940	1470×870		10			36		≥33	≥36.6	70.11	86.91
1600×1000	1740×1140	1670×1070					40		≥32		93.39	117.39
1800×1200	1940×1340	1870×1270					44		≥30.5		119.9	152.28

标记示例
公称尺寸为1000×800mm的A型隔声窗：
隔声窗 1000×800×24 CB/T3917-1999
公称尺寸为1000×800mm的B型隔声窗：
隔声窗 1000×800×24 CB/T3917-1999

Examples of designation
A sound insulation window of type A, of nominal size 1000 × 800mm:
Sound insulation window 1000 × 800 × 24 CA/T 3917 – 1999
A sound insulation window of type A, of nominal size 1000 × 800mm:
Sound insulation window 1000 × 800 × 24 CB/T 3917 – 1999